


# **COST-EFFECTIVE** ELIABLE SOCK

(2.54 mm) .100" PITCH • HLE SERIES

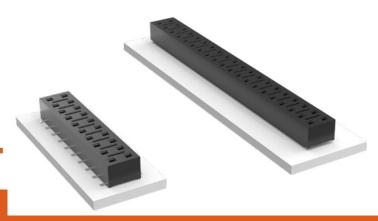

### HLE **Board Mates:**

TSW, MTSW, DW, EW, ZW, TLW, TSM, MTLW, HW

## HLE PER ROW

П П П П ш Д 

02 thru 50

No. of Positions x (2.54) .100 -

ш П

ш П П

**PLATING** OPTION

Gold flash on

contact, Matte Tin on tail

= 10 μ" (0.25 μm)

Gold on contact,

Matte Tin on tail

(5.08)

.200

### TAIL OPTION

Leave blank for Surface Mount (Requires –BE for Bottom Entry)

### -TE

= Through-hole Top Entry

### -PE

= Through-hole Pass-through Entry (Requires –BE for Bottom Entry)

# OPTION

**OTHER** 

-BE Bottom Entry (Not available with –TE)

### -A

= Alignment Pin (4 positions min.) Metal or plastic at Samtec discretion (Not available with -TE, -PE & -LC)

-LC = Locking Clip (2 positions min.) (Not available with -A) (Manual placement required)

**-K** = (6.50 mm) .256" DIA Polyimide Film Pick & Place Pad (3 positions min.) Not available with -TE or -PE tail option

### -P

= Metal Pick & Place Pad (3 positions min.)

### -TR

= Tape & Reel (29 positions max.)

### -FR

= Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)

### **SPECIFICATIONS**

Insulator Material: Black Liquid Crystal Polymer Contact Material:

Plating:
Au or Sn over
50 µ" (1.27 µm) Ni
Current Rating (HLE/TSM):

4.1 A per pin

(2 pins powered) **Voltage Rating:** 400 VAC

Operating Temp Range: -55 °C to +125 °C


Insertion Depth: (1.78 mm) .070" to (3.43 mm) .135" pass-through, or (2.59 mm) .102" min plus board thickness for bottom entry

### **PROCESSING**

Lead-Free Solderable:

SMT Lead Coplanarity:


(0.10 mm) .004" max (02-20) (0.15 mm) .006" max (21-50)\* \*(.004" stencil solution may be available; contact IPG@samtec.com)

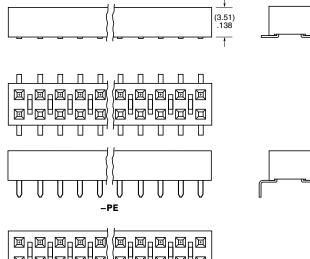

пп

## **ALSO AVAILABLE**

Other Platings (MOQ Required)

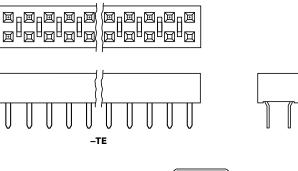







Some lengths, styles and options are non-standard, non-returnable.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

HLE-117-02-F-DV