REVISION N



ALL DIMENSIONS ARE REFERENCES
(SEE XC-179-XX-X-XX FOR CONTROLLING PRINT)

CC79X-XXXX-XX-X

SUPPLIED
-L: LOOSE
-R: REEL

LEAD STYLE
-2630 (26-30 AWG)
-2024 (20-24 AWG)
N ** -2830 (28-30 AWG)(PTFE)

PLATING
-F: FLASH SELECTIVE
-L: LIGHT SELECTIVE
-S: SELECTIVE

OPTION
(INSULATION THICKNESS)
-01

** NOT RELEASED FOR PRODUCTION

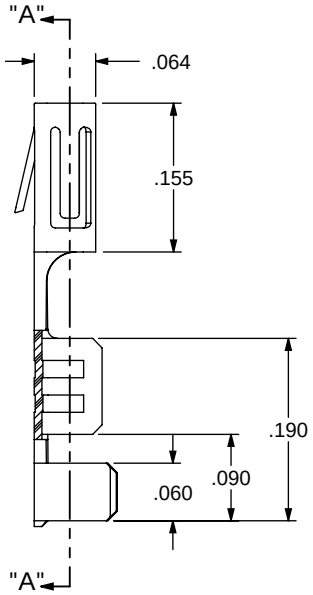

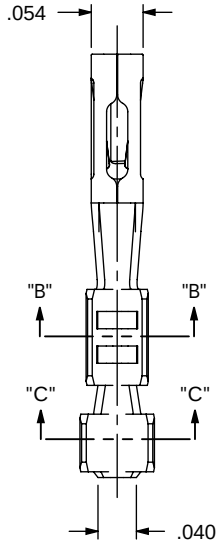

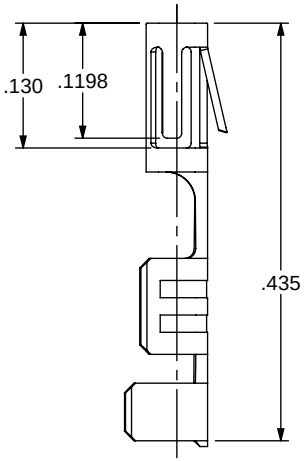



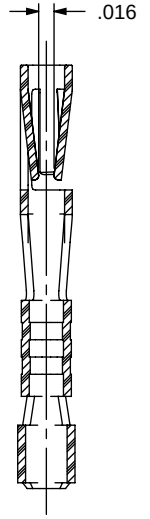

SECTION "A"-"A"

FIG. 1



SECTION "B"-"B"



SECTION "C"-"C"

TABLE 1								
STYLE	"A"	"B" REF	"C"	"D"	"E" REF	"F"	"J"	"K"
-2630	.055	.045	.015	.080	.073	.025	.010	.020
-2024	.080	.073	.018	.110	.103	.030	.010	.030
*-2830	.055	.045	.015	.054	.057	.016	.010	.020

* NOT TOOLED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: 2 °
.XXX:
.XXXX:

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 5:1

PHOS BRONZE, 510 SPRING TEMPER

THICKNESS: .0080

F:\DWG\MISC\MKTG\CC79X-XXXX-XX-X-MKT.SLDDRW

DESCRIPTION: .100 IPD1 CONTACT

DWG. NO. CC79X-XXXX-XX-X

BY: DEAN P 8/12/2004 SHEET 1 OF 2

REVISION N

CARRIER SPECIFICATIONS

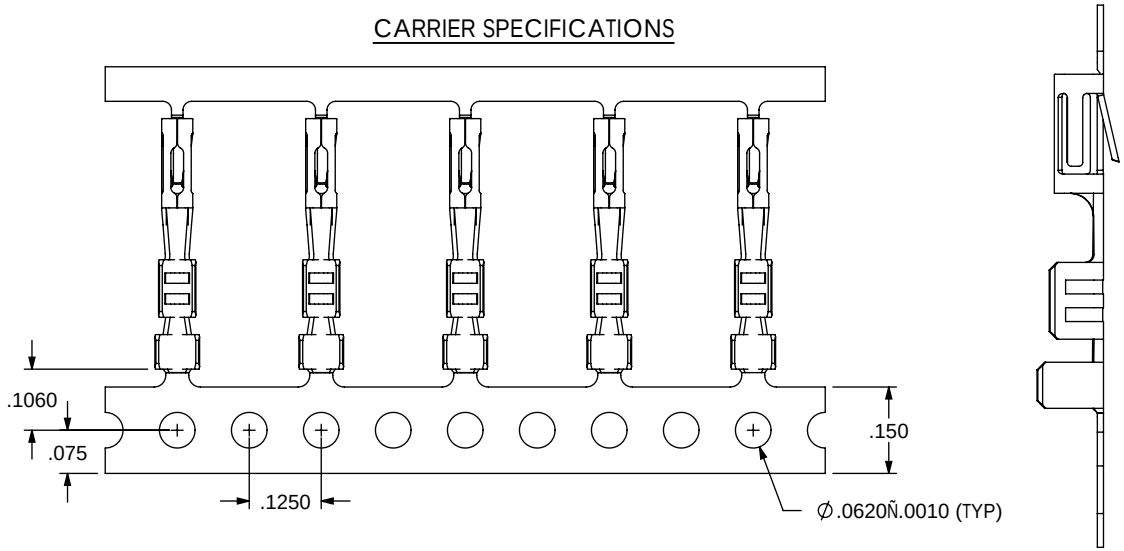

REEL SPECIFICATIONS

PLATED C-179 PARTS TO BE PULLED, PLATE OPTION CONFIRMED, CORRECT DASH
NUMBER CONFIRMED BY CHECKING "E REF" DIMENSION,
UNWOUND, THEN REWOUND AND COUNTED,
15,000 +300/-0 PCS POSITIONED AS SHOWN ON SAMTEC REEL WITH VIEWPORTS,
LABELED CC79 WITH APPROPRIATE PLATE CALLOUT AND LABEL PLACED AS SHOWN.
MAXIMUM No OF SPLICES PER REEL: 2. SPLICES ARE NOT TO BE CONNECTED.
NUMBER OF SPLICES TO BE MARKED ON EACH REEL.
REELED PARTS TO BE INTERLEAVED WITH PAPER BETWEEN EACH LAYER OF PARTS.
ONE SPLICE IN INTERLEAF ALLOWED PER REEL. SECURELY CONNECT INTERLEAF SPLICE.
OUTER WRAP SHALL RECEIVE RB-24-0.75-P PROTECTIVE REEL BAND.

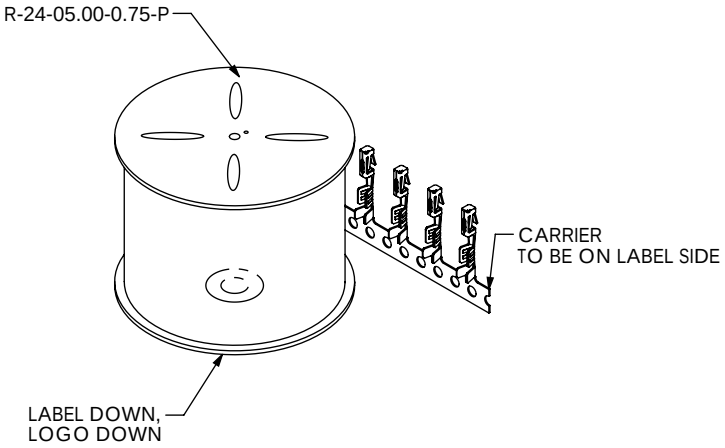

UNWINDING DIRECTION

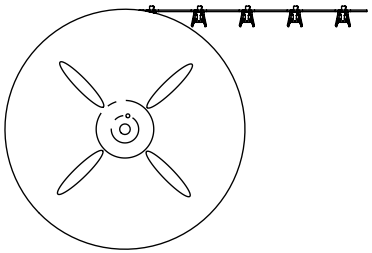

F:\DWG\MISC\MKTG\CC79X-XXXX-XX-X-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 5:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION: .100 IPD1 CONTACT

DWG. NO. CC79X-XXXX-XX-X

BY: DEAN P 8/12/2004 SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:
CC79L-2830-01-S