


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3	
ITEM	QTY.	PART NO.	DESCRIPTION
1	2	SPH-001T-P0.5L	PAD HOUSING CONTACT
2	57.7mm	22AWG, UL1061	BLACK

1	
APPLICABLE HOUSINGS	
NO. OF CIRCUITS	HOUSING PART NO.
10	PADP-10V-1-S
12	PADP-12V-1-S
14	PADP-14V-1-S
16	PADP-16V-1-S
20	PADP-20V-1-S
22	PADP-22V-1-S
24	PADP-24V-1-S
40	PADP-40V-1-S

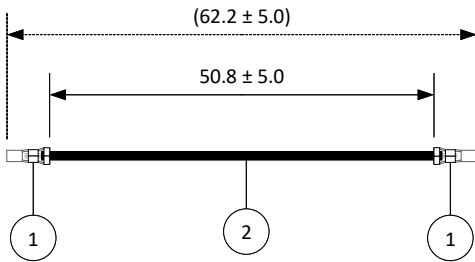

SCALE	1: 1	
DIMENSIONS	All dimensions are in MM with a tolerance of $\pm 5.0$ unless otherwise specified.	
	Electrical Specifications	
		Current: 3.0A AC/DC
		Voltage: 250V AC/DC
DRAWN BY		STEVEN PILKINGTON
CHECKED BY		JUSTIN BAKER

DESCRIPTION	
2.0mm Pitch PAD Series Standard Lead - 2" Inside Length – Double End	
PART NO.	APADPAD22K51
DRAWING NO.	GAM-567
DATE	3/7/2023

**JST**

1	Revised wire style from UL1007 to UL1061	3/7/2023	SP
REV.	DESCRIPTION	DATE	BY

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JST:](#)

[APADPAD22K51](#)