




ZIF
TYPE

FXV CONNECTOR

Connector

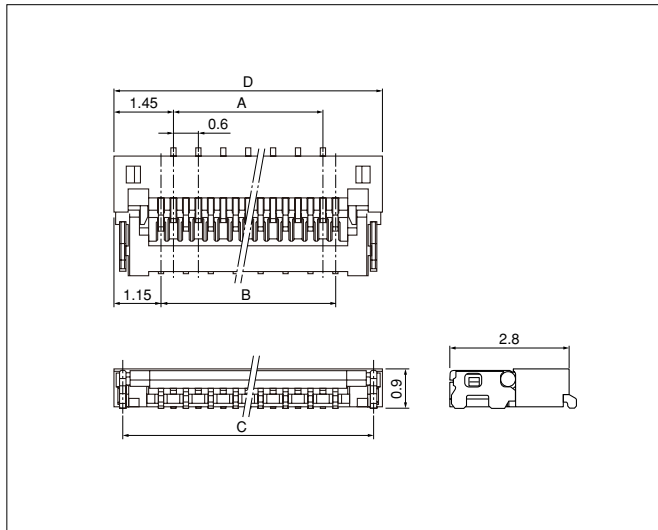

Circuits	Model No.	Dimensions (mm)				Q'ty / reel
		A	B	C	D	
11	11FXV-RSM1-GAN-ETF	2.4	3.0	4.82	5.3	5,000
13	13FXV-RSM1-GAN-ETF	3.0	3.6	5.42	5.9	5,000
15	15FXV-RSM1-GAN-ETF	3.6	4.2	6.02	6.5	5,000
17	17FXV-RSM1-GAN-ETF	4.2	4.8	6.62	7.1	5,000
21	21FXV-RSM1-GAN-ETF	5.4	6.0	7.82	8.3	5,000
25	25FXV-RSM1-GAN-ETF	6.6	7.2	9.02	9.5	5,000
27	27FXV-RSM1-GAN-ETF	7.2	7.8	9.62	10.1	5,000
29	29FXV-RSM1-GAN-ETF	7.8	8.4	10.22	10.7	5,000
31	31FXV-RSM1-GAN-ETF	8.4	9.0	10.82	11.3	5,000
33	33FXV-RSM1-GAN-ETF	9.0	9.6	11.42	11.9	5,000
35	35FXV-RSM1-GAN-ETF	9.6	10.2	12.02	12.5	5,000
37	37FXV-RSM1-GAN-ETF	10.2	10.8	12.62	13.1	5,000
39	39FXV-RSM1-GAN-ETF	10.8	11.4	13.22	13.7	5,000
43	43FXV-RSM1-GAN-ETF	12.0	12.6	14.42	14.9	5,000
51	51FXV-RSM1-GAN-ETF	14.4	15.0	16.82	17.3	5,000

Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated (nickel-stripe)

Housing: Heat resisting resin, UL94V-0


Solder tab: Copper alloy, copper-undercoated, tin-plated (reflow treatment)

Cover: Heat resisting resin, UL94V-0

RoHS compliance This product displays (LF)(SN)(M) on a label.

Note: This products listed above are supplied on embossed-tape.

Lead section dimensions of FPC

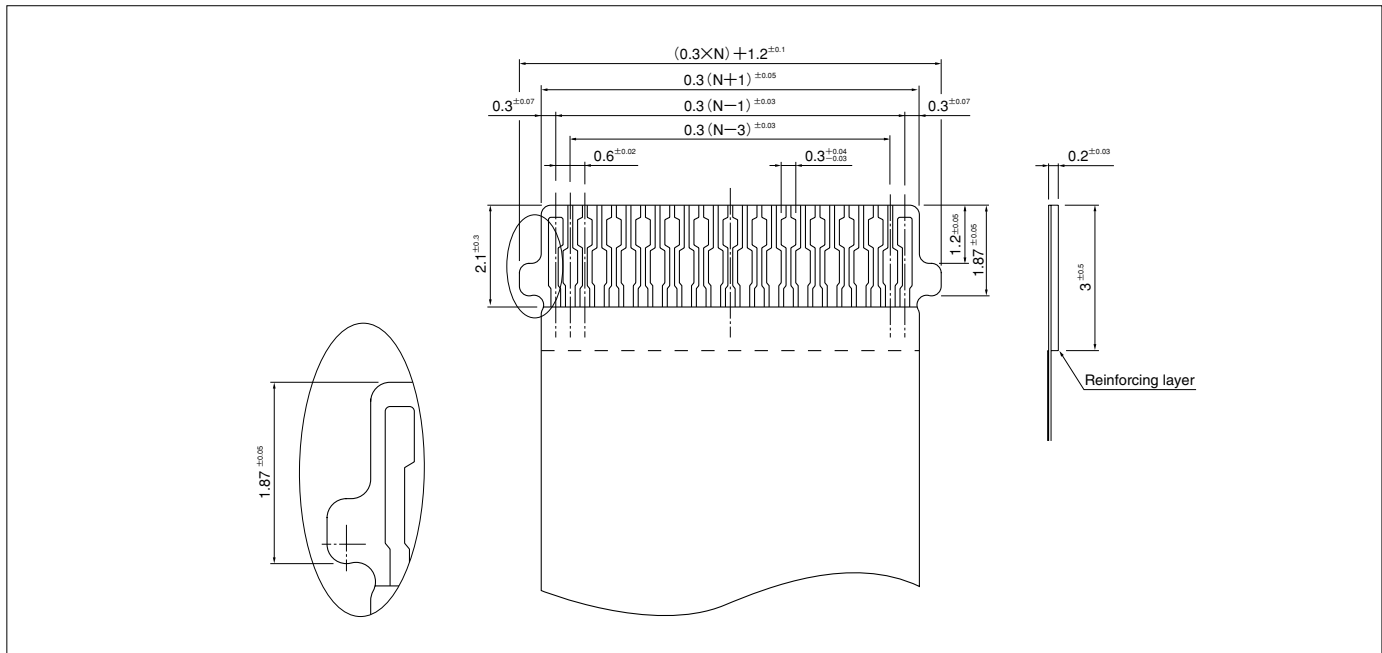

Note: N --- Number of circuits

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JST:

[15FXV-RSM1-GAN-TF\(LF\)\(SN\)\(M\)](#) [15FXV-RSM1-GAN-ETF\(LF\)\(SN\)\(K\)](#) [13FXV-RSM1-GAN-ETF\(LF\)\(SN\)\(T\)](#)