

SECTION **B-B**

SCALE 4.000



NOTES : UNLESS OTHERWISE SPECIFIED.

1. CONTACT DESIGNED TO THE REQUIREMENTS OF ARINC 600.

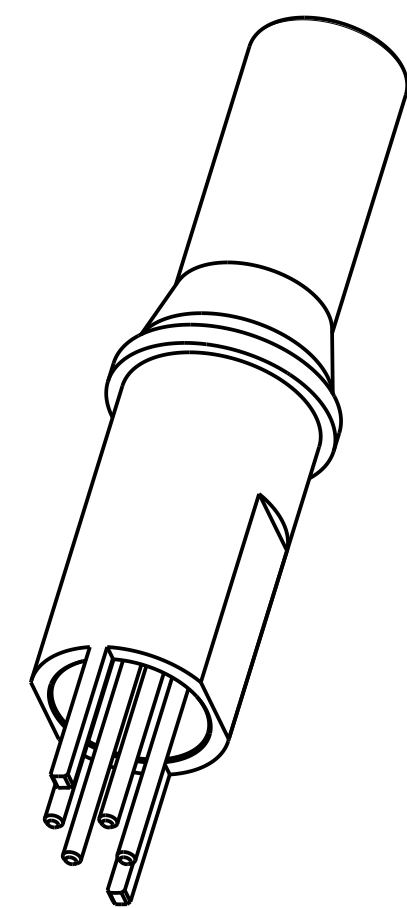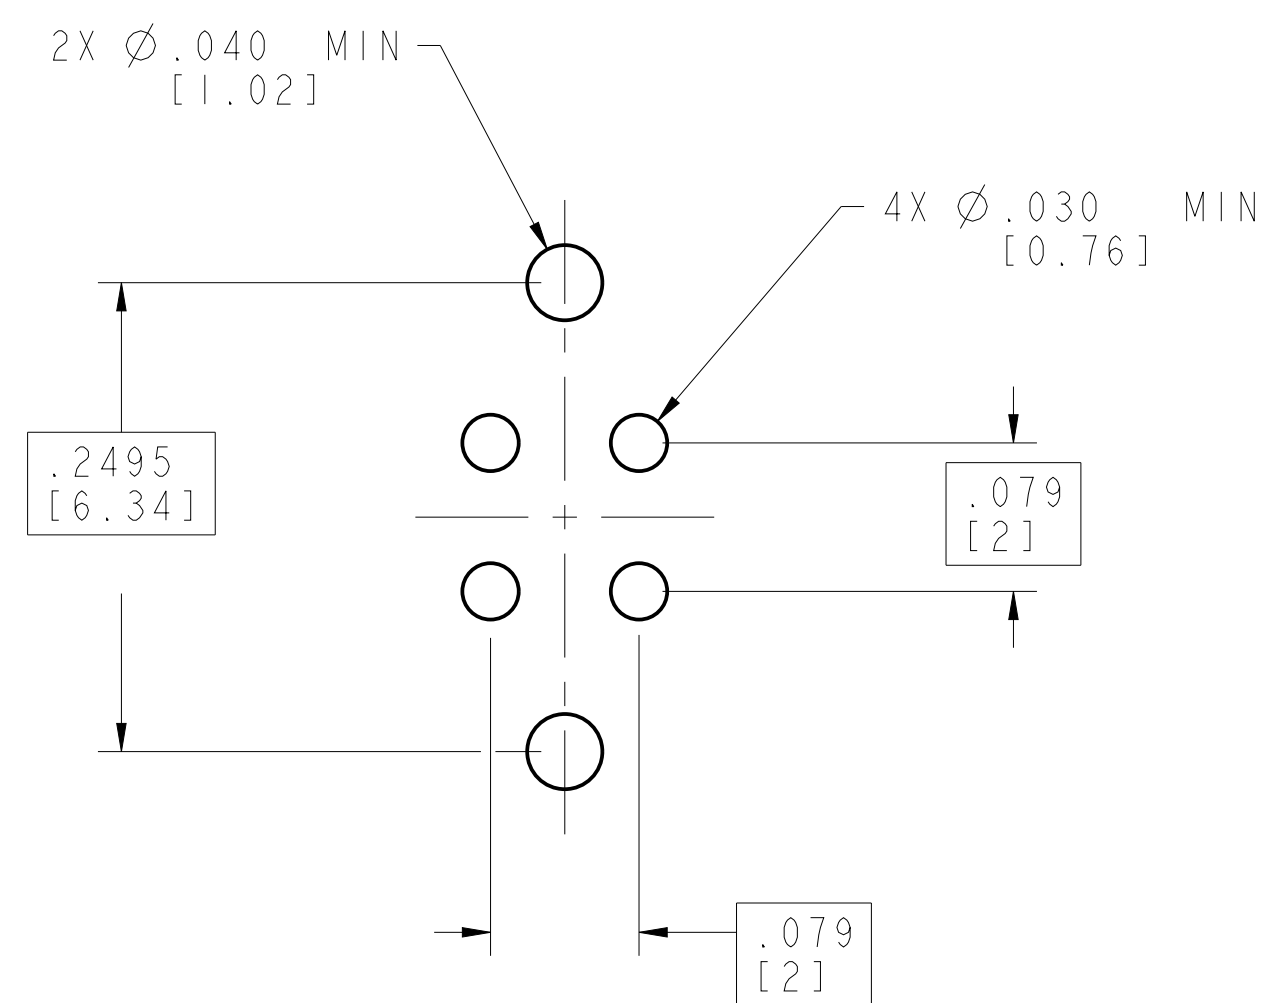

RECOMMENDED PCB LAYOUT

SCALE 10.000

ELECTRONIC APPROVALS ON FILE				
 ITT Cannon LLC 56 Technology Drive, Irvine, CA 92618	WEIGHT		CRITICAL DIM ▼	0
	DENSITY		SPC DIM ▼	0
	VOLUME		KEY CHARACTERISTIC	KEY 0
	UNLESS OTHERWISE SPECIFIED: -DIMENSIONS AND TOLERANCES ARE PER ASME Y14.5M-1994 -DIMENSIONS ARE IN INCHES AND (MM). -REMOVE ALL BURRS AND SHARP EDGES .005 TO .0131 MAX. -DO NOT SCALE DRAWING.		SURFACE AREA	
REF				
PART NO		224-0007-007		
TOL DECIMALS .X ± .02 (0.51) .XX ± .01 (0.25) .XXX ± .005 (0.127) .XXXX ± .0005 (0.0127)	TOL ANGLES X° ± P° SURFACE ROUGHNESS 63 (1.6) ✓	SCALE 8.000 CASE CODE 71468	DESCRIPTION PIN ASSEMBLY,QUADRAX, SIZE 8, STRAIGHT, PCB MOUNT EXTENDED BODY	
3RD ANGLE PROJECTION 	SIZE D	USE C	SHEET 1 / 1	REV A
			224-0007-007	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ITT Cannon:](#)

[224-0007-007](#)