



#7 TERMINAL REMOVED
ANSCHLUSS ABGESCHNITTEN


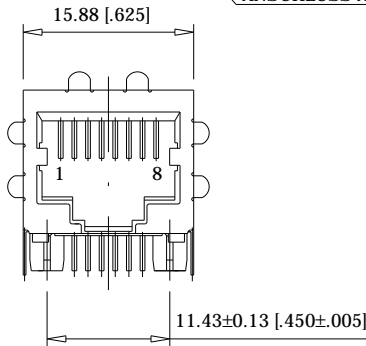


RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
EMPFOHLENER FUER LEITERPLATTE (BESTUECKUNGSSEITE)

TOL ±0.05 [002] UNLESS NOTED

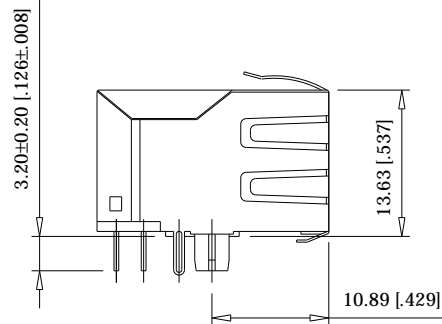

RECOMMENDED PANEL CUTOUT
EMPFOHLENER FRONTPLATTEN AUSSCHNIITT

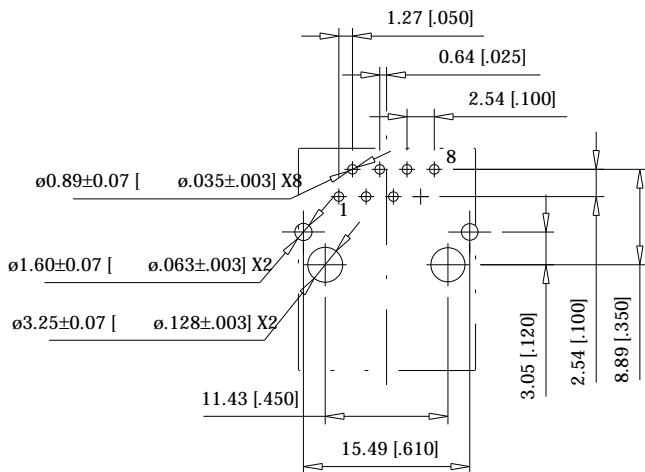

MAGNETICS SPECIFICATIONS @ 25°C

AUTO MDIX COMPATIBLE

URNS RATIO:

- (P1-P2 : J1-J2) 1CT : 1 ±3%
- (P3-P6 : J3-J6) 1CT : 1 ±3%

OCL (100KHz, 0.1Vrms, 8mA)

- (P1-P2 : P3-P6) 350µH MIN

DCR (P1-P2, P3-P6) 1.1 OHMS MAX

INSERTION LOSS:

- 0.1 MHz - 100 MHz -1.1 dB MAX

RETURN LOSS:

- 0.5 MHz - 30 MHz -18 dB MIN
- 40 MHz -15.5 dB MIN
- 50 MHz -13.6 dB MIN
- 60 MHz - 80 MHz -12 dB MIN

CROSSTALK (0.1 MHz - 100 MHz) 40 dB TYP

COMMON MODE REJECTION

- 0.1 MHz - 30 MHz: -50 dB TYP
- 30 MHz - 60 MHz: -40 dB TYP
- 60 MHz - 100 MHz: -35 dB TYP

ISOLATION: 1500 Vrms

MATERIALS AND FINISH

HOUSING: GLASS FILLED POLYESTER UL 94 V-0 BLACK

SHIELDING: Cu ALLOY, PLATED WITH Ni

CONTACTS: PHOSPHOR BRONZE

CONTACT FINISH: Au, 0.8 µm (30 µin) OVER Ni

TERMINAL FINISH: SnPb


MECHANICAL CHARACTERISTICS

DURABILITY: 1000 MATING CYCLES

OPERATING TEMPERATURE: -40°C TO 85°C

ELECTRICAL SCHEMATIC - 10/100 BASE TX - H3D01
EXTENDED TEMPERATURE RANGE

ELEKTRISCHES DIAGRAMM

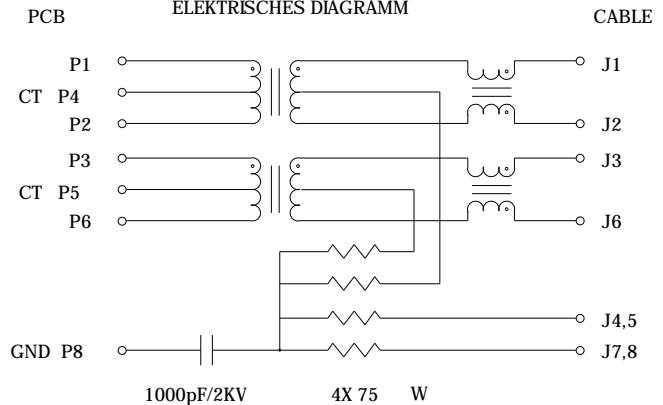

NOTE 1: SIDE SHIELD TABS IN REAR 3.05mm (R)

NOTE 2: PANEL GROUND FLANGES BOTH SIDES AND TOP (GF5)

Information:		Tolerances	Scale 2:1	Class. No. -
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	All Dimensions in mm	Designation
b		02JUL04	MOD JACK - MJIM	
Index		Date	8C7T, 1X1, INTEGRATED MAGNETICS	
ERNI		www.ERNI.com	203338	
			I	
			MAXMJ	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[203338](#)