

Customer Part:
Description

- Metal can package mounted on an SMD base. Resistance welded, hermetically sealed in an inert atmosphere, glass to metal seals on leads.
- Model 87SMX
- Model Issue number 9

Frequency Parameters

- Frequency 16.0MHz
- Frequency Tolerance $\pm 50.00\text{ppm}$
- Tolerance Condition $@ 25^\circ\text{C} \pm 2^\circ\text{C}$
- Frequency Stability $\pm 100.00\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Overtone Order Fundamental
- Ageing $\pm 5\text{ppm typ per year @ } 25^\circ\text{C}$

Electrical Parameters

- Load Capacitance (CL) 20.00pF
- Shunt Capacitance (C0) 7pF max
- Drive Level $50\mu\text{W typ, } 300\mu\text{W max}$
- ESR 30.00Ω max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: 981m/s^2 , 6ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: 10Hz-60Hz, 0.75mm amplitude, 60Hz-500Hz, 98.1m/s^2 , 30mins in 3 mutually perpendicular planes

Manufacturing Details

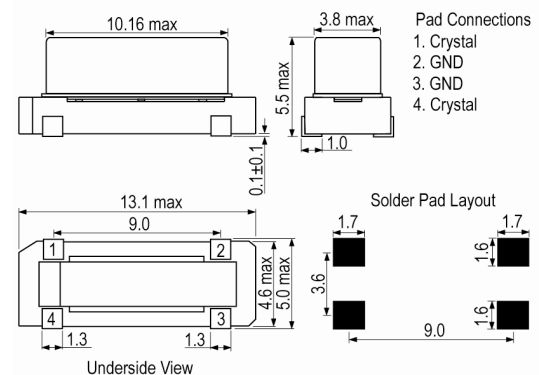
- Please note that this part is NOT suitable for inverted reflow process. Please contact our application support team if this is necessary.
- RoHS Terminations SnAgCu
- RoHS Reflow Temp $260\text{degC } 10\text{s}$

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
- Pack Size: 1,000
- *Alternative packing option available*

Outline (mm)

Sales Office Contact Details:

 UK: +44 (0)1460 270200
 Germany: 0800 1808 443

 France: 0800 901 383
 USA: +1.760.318.2824

 Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IQD Frequency Products:](#)

[LFXTAL058519Reel](#)