


AMUR1020DC-HF Thru. AMUR1060DC-HF

Reverse Voltage: 200 to 600 V

Forward Current: 10 A

RoHS Device

Halogen Free





Features

- Low cost.
- Low leakage.
- Low forward voltage drop.
- High current capability.
- AEC-Q101 Qualified.

Mechanical data

- Case: TO-252, molded plastic.
- Mounting position: Any.




Circuit Diagram

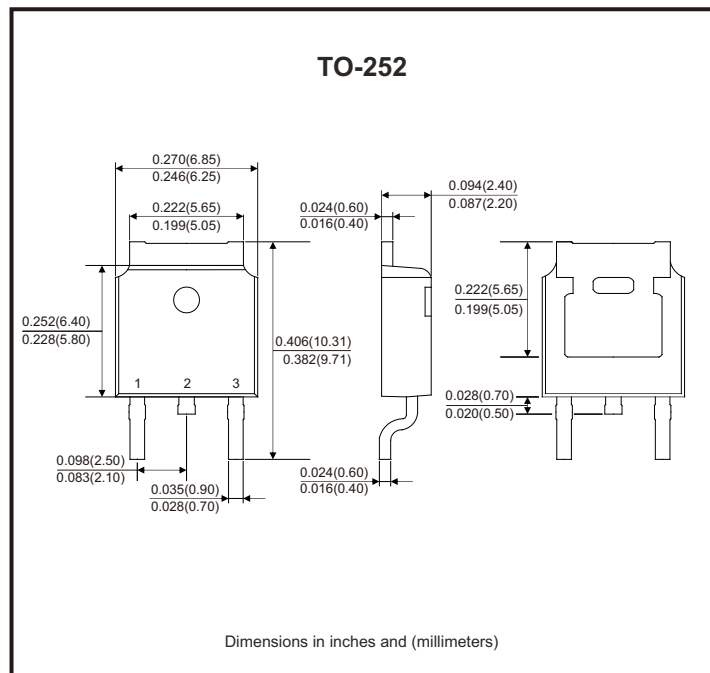


Maximum Ratings and Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbols	AMUR1020DC-HF	AMUR1030DC-HF	AMUR1040DC-HF	AMUR1060DC-HF	Units
Recurrent peak reverse voltage	V _{RRM}	200	300	400	600	V
RMS voltage	V _{RMS}	140	210	280	420	V
DC blocking voltage	V _{DC}	200	300	400	600	V
Average forward rectified current @ T _A = 100°C	I _{F(AV)}	10				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	60				A
Max. forward voltage @ I _F = 5A	V _F	0.98	1.3		1.5	V
Max. reverse current V _R = V _{RRM} , T _A = 25°C V _R = V _{RRM} , T _A = 150°C	I _R	5.0 250	10 500			μA
Max. reverse recovery time @I _F = 0.5A, I _R = 1A, I _{rr} = 0.25A	t _{rr}	25	50			ns
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150				°C

Typical Rating and Characteristic Curves (MUR1020DC-HF Thru. MUR1060DC-HF)

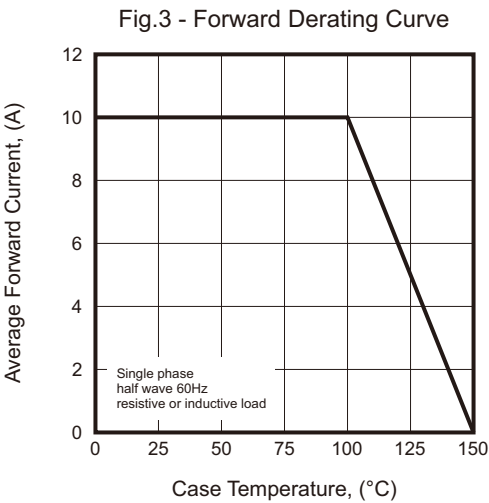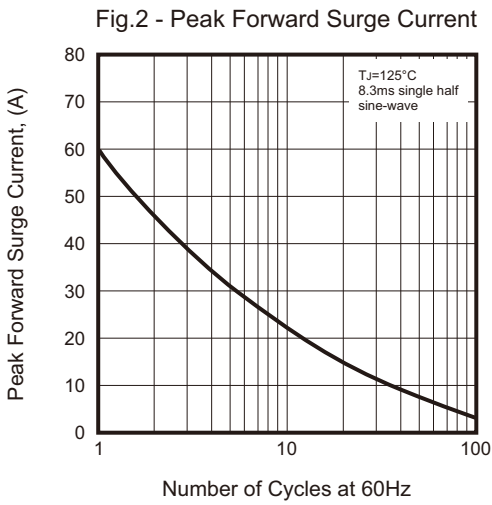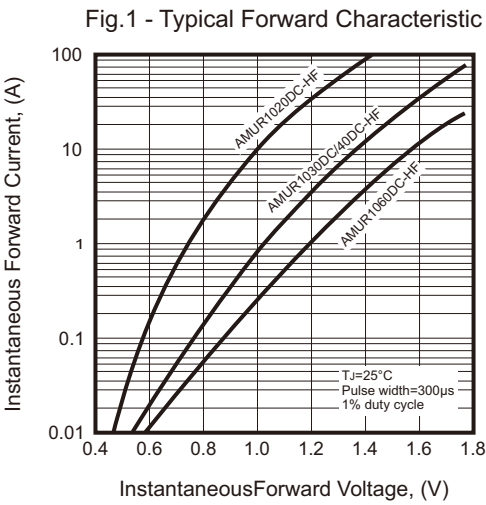

Reel Taping Specification

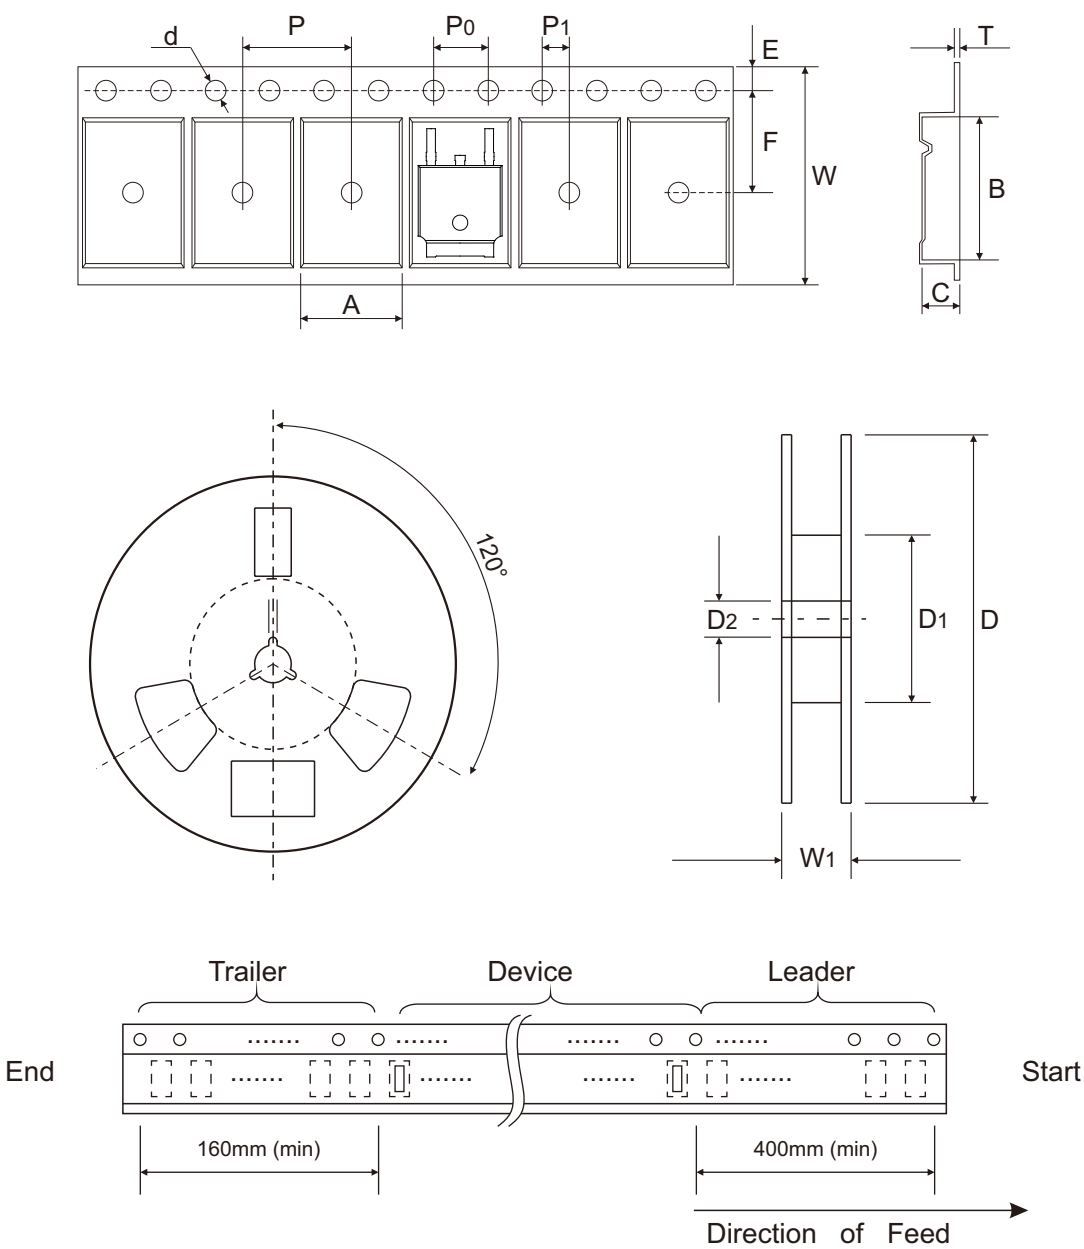


TO-252	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	6.90 ± 0.10	10.50 ± 0.10	2.70 ± 0.10	1.50 ± 0.25	330 ± 1.00	100 ± 1.00	13.00 ± 0.20
	(inch)	0.272 ± 0.004	0.413 ± 0.004	0.106 ± 0.004	0.059 ± 0.010	12.992 ± 0.039	3.937 ± 0.039	0.512 ± 0.008

TO-252	SYMBOL	E	F	P	P ₀	P ₁	T	W	W ₁
	(mm)	1.75 ± 0.10	7.50 ± 0.10	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	0.30 ± 0.05	16.00 + 0.30 - 0.20	21.00 ± 0.30
	(inch)	0.069 ± 0.004	0.295 ± 0.004	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.012 ± 0.002	0.630 + 0.012 - 0.008	0.827 ± 0.012

Marking Code


Part Number	Marking Code
AMUR1020DC-HF	MUR1020DC
AMUR1030DC-HF	MUR1030DC
AMUR1040DC-HF	MUR1040DC
AMUR1060DC-HF	MUR1060DC

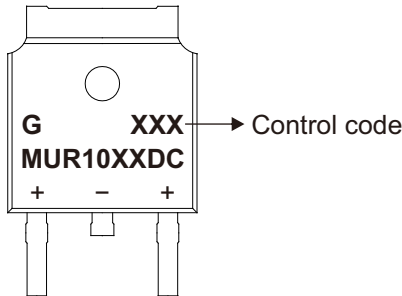

xx = Product type marking code

Suggested P.C.B. PAD Layout

SIZE	TO-252	
	(mm)	(inch)
A	1.80	0.071
B	2.70	0.106
C	1.50	0.059
D	2.30	0.091
E	6.40	0.252
F	6.80	0.268

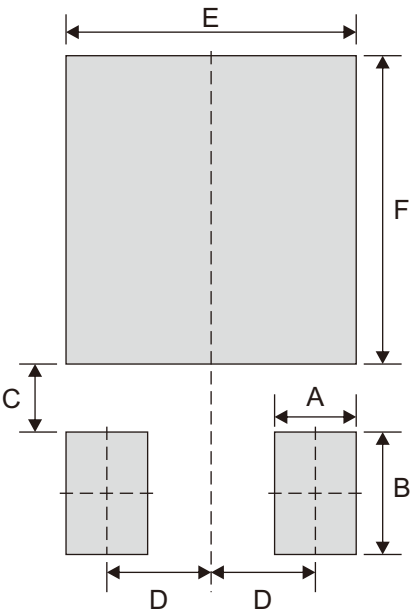

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
TO-252	2,500	13

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[AMUR1030DC-HF](#) [AMUR1020DC-HF](#) [AMUR1060DC-HF](#) [AMUR1040DC-HF](#)