

# ARTESYN ADN-C SERIES

120 - 960 Watts



The ADN-C series of single-phase DIN rail mounting AC-DC power supplies provides a compact, efficient and easy-to-use solution for industrial applications. Their slim form factor helps to maximize per-rail power density and front panel status LEDs facilitate diagnostics and trouble shooting. Features include active PFC, adjustable output, overvoltage with auto protection, parallel operation capability, and a five year warranty. This DIN rail power supply series is perfect for applications such as machine control, process control, conveying equipment, material handling, vending machines, and packaging equipment, as well as test and measurement and gaming applications.

## SPECIAL FEATURES

- Five year warranty
- High efficiency > 90% typical
- Full power at 60 °C
- Power Boost™
- Industrial grade design (metal case and mounting clip)
- MTBF > 450,000h demonstrated at 40 °C
- Active PFC > 0.92
- Adjustable output
- Overvoltage protection with autorecovery
- Continuous short circuit and overload protection
- SEMI F47 Sag Immunity
- Three status LEDs (Input, Output, Alarm)

- DC OK relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- 80 PLUS® compliant (ADN20-24-1PM-C model)
- No tools required for mounting

## SAFETY

- UL508, cULus Listed
- UL 60950-1, cURus
- IEC60950-1
- Class I, Div 2 Hazardous Locations
- ATEX Certified on selected models
- IP20
- CE

## DATA SHEET

### Total Power:

120-960 Watts

### Input Voltage:

85-264 Vac,  
90-375 Vdc

### # of Outputs:

Single



**ELECTRICAL SPECIFICATIONS**

Input	
AC input range	Nominal: 100-240 Vac/115-230 Vac/85-264 Vac
DC input range	90-375 Vdc
Frequency	47-67 Hz, 400 Hz
Efficiency	> 90%
Inrush current (typical)	< 15A or < 60A depending on model
PFC	Active, better than 0.92
Output	
Nominal voltage	24 Vdc (22.5-28.5 Vdc Adj): ADN5-24-1PM-C & ADN10-24-1PM-C 24 Vdc (24-28 Vdc Adj): ADN20-24-1PM-C & ADN40-24-1PM-C
Initial voltage setting	24.5 V ± 1%
Hold-up time	> 20 ms at full load (100 Vac Input @ Tamb = +25 °C)
Voltage regulation	< ± 2% (combination line, load, time and temperature related changes)
Ripple	< 50 mVpp: ADN5-24-1PM-C & ADN10-24-1PM-C < 100 mVpp: ADN20-24-1PM-C & ADN40-24-1PM-C
Back EMF immunity	< 35 Vdc
Power Boost™	1.5 x Nominal current for 2 or 4 seconds depending on model
Short circuit current	1.5 x Nominal current at near zero volts at short circuit condition
Parallel operation	Switch selectable single unit or parallel unit operation. Units will not be damaged by parallel operation (regardless of switch position setting)
Output noise suppression	Radiated EMI values below EN61000-6-2
Overvoltage protection	> 30.5 Vdc but < 33 Vdc, auto recovery
Line and load regulation	< 0.5%
Time and temperature drift	< 1%

**GENERAL SPECIFICATIONS**

EMC emissions	EN61000-6-2:2001, EN61000-6-3:2001, Class B EN55011, EN55022 Radiated and Conducted including Annex. A, EN61000-3-2
EMC immunity	EN61000-6-1:2001, EN61000-6-2:2001, EN61000-4-2 Level 4, EN61000-4-3 Level 3, EN61000-4-6 Level 3, EN61000-4-4 Level 4 input and level 3 output. EN61000-4-5 Installation class 4, EN61000-4-11, IEC 61000-4-34 voltage dip immunity standard
Warranty	5 Years
General protection safety	Protected against continuous short-circuit, continuous overload, continuous open circuit. Protection Class 1 (IEC536), degree of protection IP20 (IEC60529) Safe low voltage: SELV (acc. IEC60950-1)
Status indicators	Visual: Three (3) status LEDs (Input, Output, Alarm) Relay: N.O. contact rated 200 mA/50 Vdc

## LED DIAGNOSTICS

LED	OK	Loss of Ac	Low Ac	No Dc	High Load	Overload	Hot	Too Hot
Input	Green	---	Yellow	Green	Green	Green	Green	Green
Output	Green	---	Green	---	Yellow	Yellow	Green	---
Alarm	---	---	---	Red	Yellow	Red	Yellow	Yellow

## ENVIRONMENTAL SPECIFICATIONS

Storage temperature	-40 °C to + 85 °C; All models
Operating temperature	From -25 °C to 70 °C. Derate starting at 60 °C; All models
	Up to 50% load permissible with horizontal or on top mounting orientation

## OTHER FEATURES

External fusing	Not required. Unit provides internal fuse (not accessible)	
Mounting orientation	Standard: Vertical, Optional: Horizontal or on Top Simple snap-on to DIN TS35/7.5 or TS35/15 rail system	
Ventilation	Normal convection, No fan required	
Cooling spacing	ADN5-24-1PM-C & ADN10-24-1PM-C: ADN20-24-1PM-C: ADN40-24-1PM-C:	15 mm in front, 25 mm above and below, 10 mm left and right 15 mm in front, 40 mm above and below, 10 mm left and right 15 mm in front, 25 mm above and below, 25 mm left and right
Connections	Input: Screw terminals, connector size range: 16-10 AWG (1.5 - 6 mm <sup>2</sup> ) for solid conductors Output: Two terminals per output, connector size range: 16-10 AWG (1.5 - 6 mm <sup>2</sup> ) for solid conductors One terminal per output for ADC40-24-1PM-C, connector size range: 7-6 AWG (10.6 - 13 mm <sup>2</sup> ) for solid conductors	

## ORDERING INFORMATION

Model Number	Power	Input Voltage	Weight	Current	Case Type	MTBF
						Demonstrated at 40 °C
ADN5-24-1PM-C	120 W	85-264 Vac 90-375 Vdc*	1.10 lbs (500 g)	5 A @ 24 Vdc	Metal with mounting clip	550,000 hours
ADN10-24-1PM-C	240 W	85-264 Vac 90-375 Vdc*	1.98 lbs (900 g)	10 A @ 24 Vdc	Metal with mounting clip	550,000 hours
ADN20-24-1PM-C <sup>1</sup>	480 W	85-264 Vac 90-375 Vdc*	2.6 lbs (1200 g)	20 A @ 24 Vdc	Metal with mounting clip	450,000 hours
ADN40-24-1PM-C	960 W	100-240 Vac	6.0 lbs (2750 g)	40 A @ 24 Vdc	Metal with mounting clip	500,000 hours

\*No UL listed for DC input


<sup>1</sup> 80 PLUS certified

## ADN-C SERIES

### DIMENSIONS

	Height	Width	Depth
ADN5-24-1PM-C	4.85 in (123 mm)	1.97 in (50 mm)	4.37 (111 mm)
ADN10-24-1PM-C	4.85 in (123 mm)	2.36 in (60 mm)	4.37 (111 mm)
ADN20-24-1PM-C	4.85 in (123 mm)	3.42 in (87 mm)	4.96 in (126 mm)
ADN40-24-1PM-C	4.85 in (123 mm)	7.09 in (180 mm)	4.81 in (122 mm)

### MECHANICAL DRAWING

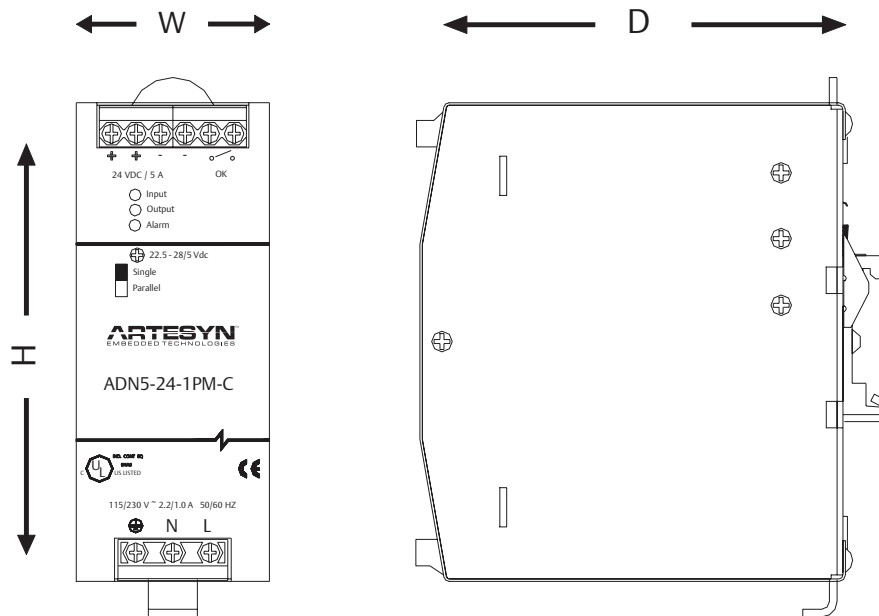



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[ADN10-24-1PM-C](#) [ADN2.5-24-1PM](#) [ADN20-24-1PM-C](#) [ADN5-24-1PM-C](#) [ADN40-24-1PM-C](#)