


Power Cord C14 to C15 - Heavy-Duty, 15A, 250V, 14 AWG, 10 ft. (3.1 m), Red

MODEL NUMBER: P018-010-ARD

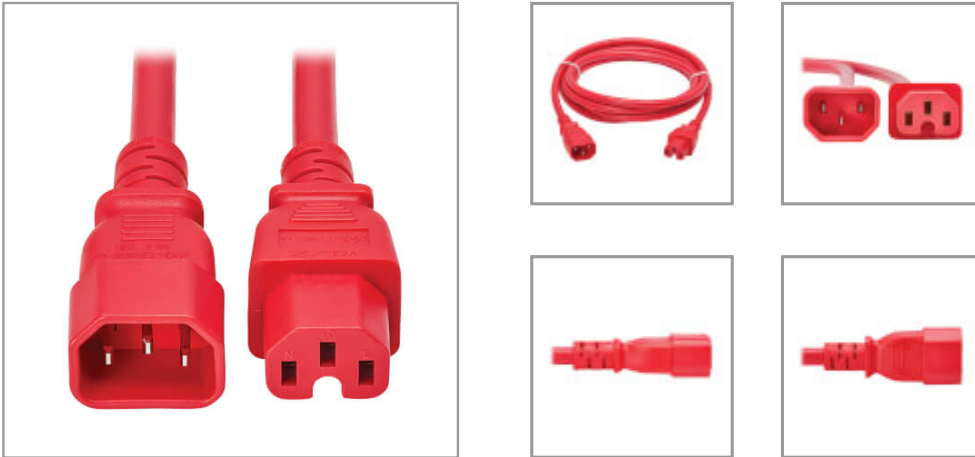

Heavy-duty C14 to C15 power cord connects a PoE network switch or other device with a C16 power inlet to a PDU or UPS system.

Features

C15 to C14 Power Cord for Network Devices That Require a Heavy-Gauge Connection

This 250V power cable features 14 AWG wire suitable for high-power connections, making it reliable for large server applications that require a higher-rated, heavier-gauge cable. The C15 connector is designed for higher-temperature devices, such as PoE (Power over Ethernet) switches with high-wattage power supplies and similar network components. This cord can also replace or upgrade the standard power cord provided by the device's manufacturer.

Red Jacket Helps Avoid Misidentification That Can Cause Costly Downtime

The UL-listed cable has a red SJT jacket, which is easy to identify quickly in a crowded PDU or UPS system and helps prevent the cable from becoming accidentally disconnected.

Highlights

- Recommended for powering PoE switches with high-wattage power supplies
- 10 ft. length allows flexibility in placing devices, while avoiding cable clutter
- C14 to C15 power cable replaces or upgrades original manufacturer's power cord
- Red jacket permits fast, easy identification in a crowded rack
- Thick 14 AWG wire gauge manages high power levels required for larger equipment

Package Includes

P018-010-ARD C14 to C15 Power Cable, 10 ft. (3.1 m), Red

Specifications

OVERVIEW	
UPC Code	037332284372
Device Compatibility	Network Switch; PDU; Server; UPS
Country/Region	North America
INPUT	
Maximum Input Amps	15.0
Voltage Compatibility (VAC)	100-250
CONNECTIONS	
Side A - Connector 1	IEC-320-C14



Powering Business Worldwide

TRIPP LITE
SERIES

Side B - Connector 1	IEC-320-C15
PHYSICAL	
Color	Red
Plug Color	Red
Cable Jacket Color	Red
Connector Color	Red
Cable Jacket Material	PVC
Cable Jacket Rating	SJT
Power Cord Jacket Type	SJT
Cable Outer Diameter (OD)	9.3mm
Number of Conductors	3
Wire Gauge (AWG)	14
Wire Gauge (OD - mm ²)	2.08
Cable Length (ft.)	10
Cable Length (m)	3.05
Cable Length (in.)	120
Shipping Dimensions (hwd / in.)	10.98 x 7.01 x 0.50
Shipping Dimensions (hwd / cm)	27.89 x 17.81 x 1.27
Shipping Weight (lbs.)	0.94
Shipping Weight (kg)	0.43
Unit Dimensions (hwd / in.)	10.980 x 7.010 x 0.500
ENVIRONMENTAL	
Operating Temperature Range	-4° to 140°F (-20° to 60°C)
Storage Temperature Range	-4° to 140°F (-20° to 60°C)
Operating Humidity Range	10% TO 65% RH, NON-CONDENSING
Storage Humidity Range	10% TO 65% RH, NON-CONDENSING
FEATURES & SPECIFICATIONS	
Antibacterial	No
Angled Plug	No
High Voltage	Yes
Locking Plug	No
Coiled Power Cord	No
STANDARDS & COMPLIANCE	



Powering Business Worldwide

TRIPP LITE
SERIES

Product Certifications	cUL Listed; UL Listed
Product Compliance	RoHS
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	Lifetime limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tripp Lite:](#)

[P018-010-ARD](#)