

Cornell Dubilier

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: 301680W250GJ1E

Customer Part Number: None

Datasheet No. 9435

Date: 10/10/06

Capacitance: 68 μ F

Tolerance: -10 % +100%

Working Volts: 250 VDC

Surge Volts: 300 VDC

Leakage Current @ 25°C: 65.0 μ A

ESR @ 120Hz @ 25°C: 1.20 Ω max.


Ripple Current @ 120Hz, 85°C: 1.30 A

Diameter (D): 19.0 \pm 0.4 mm

Length (L): 41.3 \pm 1.6 mm

Insulation: Mylar w/epoxy end fill

Operating Temperature: -55 °C to +105 °C

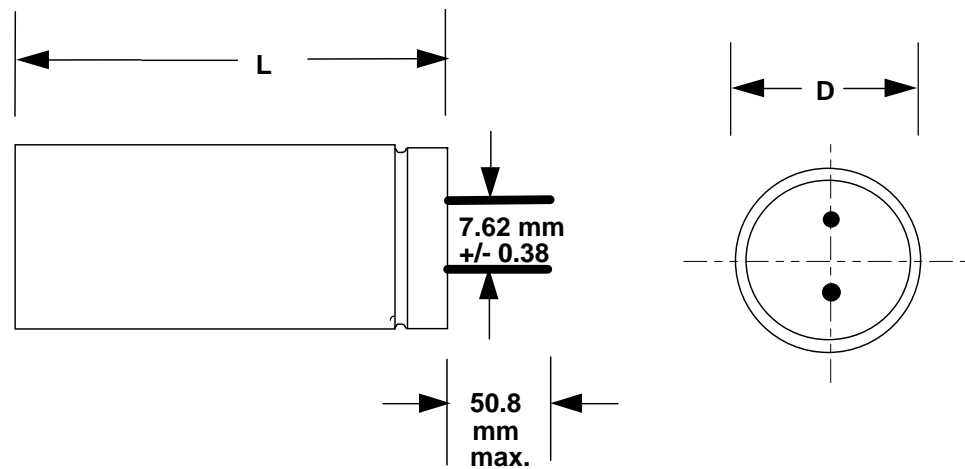

ROHS Compliant for all date codes after "0613", per Provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped in Red, Otherwise considered as an "Uncontrolled Copy"

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cornell Dubilier:](#)

[301680W250GJ1E](#)