


Oxygen Sensor M10 Thread SO-D1-XXX-AXXXC

- Full scale ranges from 1000 ppm to 96% oxygen
- High accuracy
- In-situ solution
- Stable Sensor characteristic across range
- Sensor signal not affected by temperature
- Minimal interference with other gases
- Long service life
- Single point lifetime calibration
- Zirconium Dioxide (ZrO₂) technology
- Surface temperature <70degC in operation
- Optional electronics control board with industry standard outputs
- Negligible pressure influence at atmospheric pressure

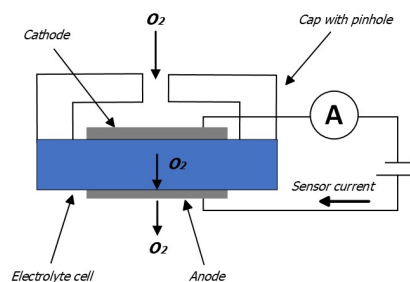

Applications

Medical

- Oxygen concentrators
- Incubators

Laboratory

- Inert gas processing cabinets (glove boxes)
- Incubators (controlled bacterial growth)

Food industry

- Packaging
- Controlled food testing
- Monitoring fruit ripening processing (storage / transport)

Measuring instrumentation

- Oxygen meters (stationary / portable)
- Measurements under controlled O₂ content
- Air conditioning and ventilation

Security technology/Monitoring

- Fire protection (increased N₂ atmosphere e.g., server rooms)
- Greenhouses, wine cellar
- Gas storage, refineries
- Diving
- Fermentation units

(Electrical-) industry

- Inert gas processing machines and cabinets
- Inert gas welding monitoring
- Storage with increased N₂ atmosphere (oxidation prevention)
- Drying units
- Nitrogen concentrators

Characteristic Data

Measuring Gas	Measuring Principle
Oxygen O ₂ concentration	Limiting current zirconium dioxide sensor

Measuring ranges				
Sensor part number	Measuring range	Output current	At gas composition	Sensor bias voltage
SO-D1-001-AXXXC	10 ppm O ₂ - 1000 ppm O ₂	150 µA - 250 µA	1000 ppm O ₂ , balance N ₂	0.70 volt
SO-D1-010-AXXXC	0.01 % O ₂ - 1.0 % O ₂	150 µA - 250 µA	1.0 % O ₂ , balance N ₂	0.75 volt
SO-D1-020-AXXXC	0.01 % O ₂ - 2.0 % O ₂	150 µA - 250 µA	2.0 % O ₂ , balance N ₂	0.75 volt
SO-D1-050-AXXXC	0.05 % O ₂ - 5.0 % O ₂	150 µA - 250 µA	5.0 % O ₂ , balance N ₂	0.80 volt
SO-D1-250-AXXXC	0.10 % O ₂ - 25.0 % O ₂	100 µA - 200 µA	20.9 % O ₂ , balance N ₂ (air)	0.85 volt
SO-D1-960-AXXXC	1.00 % O ₂ - 96.0 % O ₂	15 µA - 30 µA	20.9 % O ₂ , balance N ₂ (air)	*1-1.6 volt
Operation outside the specified measuring range can cause a permanent damage of the electrode				
*Depending on application				

Accuracy, reproducibility		
Sensor part number	Accuracy	Reproducibility
SO-D1-001	± 20 ppm O ₂	< 10 ppm O ₂
SO-D1-010	± 100 ppm O ₂	< 100 ppm O ₂
SO-D1-020	± 200 ppm O ₂	< 100 ppm O ₂
SO-D1-050	± 500 ppm O ₂	< 250 ppm O ₂
SO-D1-250	± 0.25 % O ₂	< 0.1 % O ₂
SO-D1-960	± 1.00 % O ₂	< 0.2 % O ₂

Sensor voltage / heating voltage / power consumption / heater cold resistance	
Sensor voltage:	0.7 to 1.6 volts
Heating voltage:	4.1 volts (depends on application)
Power consumption:	1.8 watts (depends on application)
Cold resistance:	$R_{(25^{\circ}\text{C})} = 3.25 \Omega \pm 0.25 \Omega$

Warm up time	Response time (t ₉₀)
Min. 30 s	< 5 sec

Maximum permissible operating temperature
200 °C limited by cable assembly

Permissible volumetric flow rate (purging the sensor)
Maximum flow rate depends on the way of purging the sensor (sensor in direct gas flow, gas beam shape, etc.) and the size of the measuring chamber.

Lifetime (MTTF)
MTTF typical 10 years


Vibration resistance
Sensors meet the European Norm EN60068-2-6 (Sinusoidal vibration tests).

Output characteristic		
$I_s(O_2) = -k \cdot \ln\left(1 - \frac{[O_2]}{100}\right)$	Is (O ₂) [O ₂] k	Sensor current in µA Oxygen concentration in % specific constant of sensor

Pin Connection Standard Housing

RAST connector pinouts

1. Sen-
2. Sen+
3. H+
4. HS+
5. H-
6. HS-

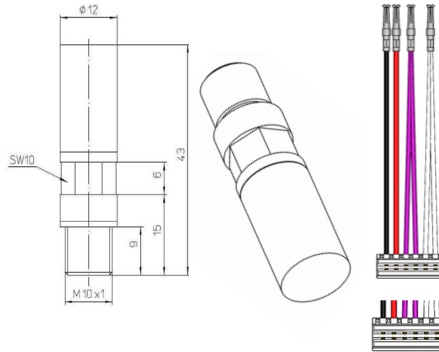

Sensors with connecting leads (teflon isolation with temperature stability up to 250 °C):

Rast - 2.5 plug keying	Cable Colour	Sensor Pin Connection	Connected to sensor pin No.
1	Black	Sen-	4
2	Red	Sen+	3
3	Violet 1	H+	1
4	Violet 2	HS+	1
5	White 1	H-	2
6	White 2	HS	2

Housing Types

Type	Housing	Dimensions
SO-D1-XXX-AXXXC	Screw mounted	M 10 * 1 mm L tot.= 43 mm; with connection cable sintered metal top Ø12 mm, L= 20 mm SW10

Temperature of the housing during operation

Type	Housing	Max. temperature
SO-D1-XXX-AXXXC	Screw mounted	70 °C

(Measured at ambient temperature of 25°C)

Cable Information

Type	Cable Length (mm)	Operating Temperature degC	Plug Connector
SO-D1-xxx-A100C	100	200 (*)	Rast 2,5
SO-D1-xxx-A300C	300	200 (*)	Rast 2,5

*Operating temperature of the sensor is limited by the temperature resistance of the cable assembly or by the use of an optional Teflon filter.

Sensor part number	Measuring range
SO-D1-001-AXXXC	10 ppm O ₂ - 1000 ppm O ₂
SO-D1-010-AXXXC	0.01 % O ₂ - 1.0 % O ₂
SO-D1-020-AXXXC	0.01 % O ₂ - 2.0 % O ₂
SO-D1-050-AXXXC	0.05 % O ₂ - 5.0 % O ₂
SO-D1-250-AXXXC	0.10 % O ₂ - 25.0 % O ₂
SO-D1-960-AXXXC	1.00 % O ₂ - 96.0 % O ₂

*Operation outside the specified measuring range can cause a permanent damage of the electrode

For electronics control board option see Datasheet "GSB- Generic Sensor Board"

Generic Sensor Board (GSB) provides a standard connection for board (solder) or cable mount sensors.

Power supply: 6-25VDC. Nominal 12VDC 0.5A. Linear signal outputs: 0-5VDC, 4-20mA and digital RS232 outputs



CAUTION

Optional:

Digital I/O open collector outputs

Custom electronics board

SENSORE Electronic GmbH is part of the Process Sensing Technologies Group (PST).

As customer applications are outside of PST control, the information provided is given without legal responsibility.

Customers should test under their own conditions to ensure the equipment is suitable for the intended application(s).

We adopt a continuous development program which sometimes necessitates specification changes without notice.

For technical assistance or enquiries about other options, please contact us here:

sensors@processsensing.com

Aufeldgasse 37-39 | A-3400 Klosterneuburg

Tel. +43 2243 450-0

© 2023 Process Sensing Technologies

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SST Sensing:](#)

[EGa0202std-SO-D1-050-A300C](#) [EGa0202std-SO-D1-960-A300C](#) [EGa0202std-SO-D2-001-A300C](#) [EGa0202std-SO-D1-250-A300C](#) [EGa0202std-SO-D1-010-A300C](#) [EGa0202std-D1050A300](#) [EGa0202std-D1010A300](#) [EGa0202std-D1250A300](#) [EGa0202std-D1960A300](#) [EGa0202std-D2001A300](#)