



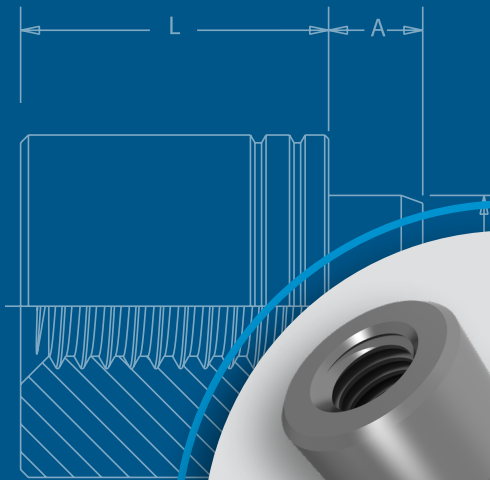

KTM

FASTENERS FOR USE WITH PC BOARDS

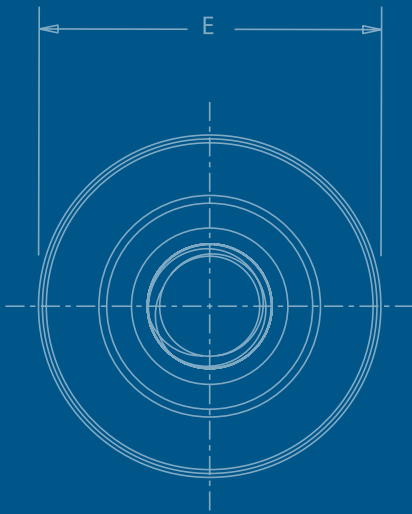

PEM® brand fasteners that utilize, surface-mount, broaching and flaring technology for use with PC boards.

No matter how sophisticated or advanced, electronic components must be attached reliably and securely if they are to deliver optimum performance. We offer several fastener products for use with PC boards to satisfy component-to-board, board-to-board, and board-to-chassis attachment needs.

ReelFast® surface mount fasteners mount on PC boards in the same manner and at the same time as other surface mount components prior to the automated reflow solder process. The fasteners simply become another board component. This alleviates concerns about potential damage to PC boards due to improper secondary installation operations. The fasteners are provided on tape and reel compatible with existing SMT automated installation equipment. The benefits of using ReelFast® SMT fasteners are: faster assembly; reduced scrap; reduced handling; and reduced risk of board damage.

Broaching fasteners can also offer practical alternatives to “loose” hardware. A broaching fastener is a knurled-shank fastening device that can be pressed into a hole to provide a permanent, strong, threaded or unthreaded attachment point in PC boards. They can also be used in aluminum, acrylic, casting and polycarbonate components. Specially formed axial grooves around the shank of the fastener “broach” or cut into the material, creating a firm, interference-type fit resistant to rotation. In PC boards, broaching fasteners are recommended for use in non-plated holes.

Broach/flare-mount standoffs (KFB3™) offer a combined broach/flare feature for even greater pullout performance in PC board materials.

Fastener drawings and models are available at www.pemnet.com. Custom sizes are available on special order. [Contact us](#) for more information.

Nuts And Spacers/Standoffs

SMTBSO™ - ReelFast® surface mount fasteners with internal blind-hole threads - [PAGE 4](#)



New

SMTSO™/SMTSOB™ — ReelFast® surface mount nuts and standoffs are available threaded and unthreaded — [PAGE 5](#)



SMTSS™ — ReelFast® SNAP-TOP® standoffs feature a spring action to hold PC board securely without screws or threaded hardware — [PAGE 6](#)



SMTSK™ — ReelFast® KEYHOLE® standoffs eliminate the need for attaching screws — [PAGE 7](#)



KF2™/KFS2™ — Broaching nuts, internally threaded for mounting on PC boards — [PAGE 8](#)



KFE™/KFSE™ — Broaching standoffs, threaded or unthreaded for stacking or spacing — [PAGE 9](#)



KFB3™ — Broach/flare-mount standoffs with greater pullout performance — [PAGE 10](#)



KSSB™ — Broaching, SNAP-TOP® standoffs feature a spring action to hold PC board securely without screws or threaded hardware — [PAGE 11](#)



Captive Panel Screws

SMTPF LSM™ — ReelFast® surface mount spring-loaded captive panel screws — [PAGE 12](#)



SMTPF™ — ReelFast® surface mount captive panel screws — [PAGE 13](#)



PFK™ - Broaching panel fastener assemblies for mounting on PC boards — [PAGE 14](#)



Studs

KFH™ — Threaded broaching studs for use as solderable connectors or as permanently mounted studs on PC boards — [PAGE 15](#)



Right Angle Fasteners

SMTRA™ — ReelFast® R'ANGLE® surface mount fasteners provide strong re-usable threads at right angles to PC boards — [PAGE 16](#)



Sheet Joining Fasteners

SFK™ — SpotFast® clinch/broach mount fasteners for joining metal to PCB/plastic panels — [PAGE 17](#)



Material and Finish Specifications

— [PAGE 18](#)

Installation

— [PAGE 19-22](#)

Performance Data

— [PAGE 23-25](#)


Other fasteners for use with PC boards

— [PAGE 26](#)

Quick Reference Chart

| PEM® Fastener | Page No. | Mounting Types | | | | Primary Use | | | | | | | |
|---------------|----------|----------------|--------------|---------------|---------------|-------------|-----------------|-----------------|------|---------------|--------------|------------------------|------------------------|
| | | Broach | Broach/Flare | Surface Mount | Clinch/Broach | Nut | Spacer/Standoff | Snap Attachment | Stud | Captive Screw | Color Coding | Right Angle Attachment | Sheet to Sheet Joining |
| SMTBSO | 4 | | | ▪ | | ▪ | ▪ | | | | | | |
| SMTSO/SMTSOB | 5 | | | ▪ | | ▪ | ▪ | | | | | | |
| SMTSS | 6 | | | ▪ | | | ▪ | ▪ | | | | | |
| SMTSK | 7 | | | ▪ | | | ▪ | | | | | | |
| KF2/KFS2 | 8 | ▪ | | | | ▪ | | | | | | | |
| KFE/KFSE | 9 | ▪ | | | | | ▪ | | | | | | |
| KFB3 | 10 | | ▪ | | | | ▪ | | | | | | |
| KSSB | 11 | ▪ | | | | | ▪ | ▪ | | | | | |
| SMTPLSM | 12 | | | ▪ | | | | | | ▪ | | | |
| SMTPF | 13 | | | ▪ | | | | | | ▪ | ▪ | | |
| PFK | 14 | ▪ | | | | | | | | ▪ | | | |
| KFH | 15 | ▪ | | | | | | | ▪ | | | | |
| SMTRA | 16 | | | ▪ | | | | | | | | ▪ | |
| SFK | 17 | | | | ▪ | | | | | | | | ▪ |

PEM® Trademarks

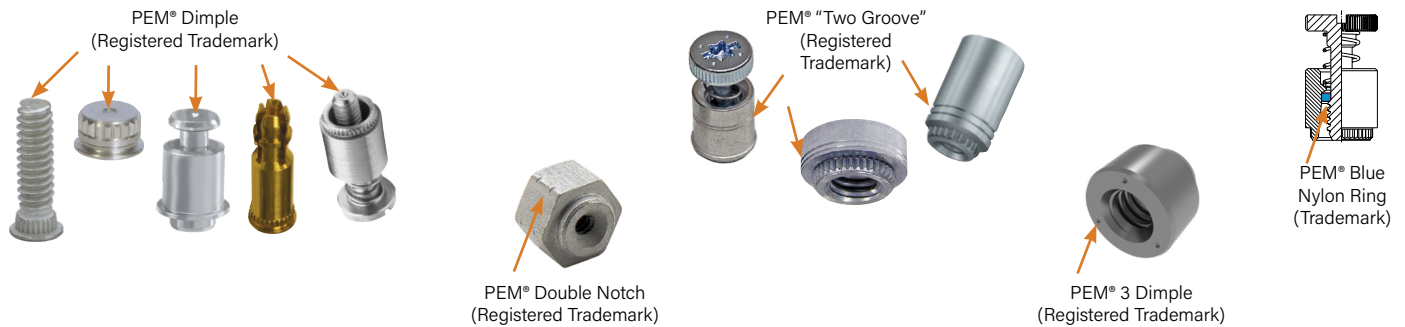

To be sure that you are getting genuine PEM® brand fasteners, look for the unique PEM® product markings and identifiers.





Fastener drawings and models are available at www.pemnet.com

Custom sizes are available on special order. [Contact us](#) for more information.



SMTBSO™ ReelFast® Surface Mount Fasteners

- Internal blind-hole threads securely mounts onto PC Board - less risk of damage to PC Board during assembly
- Allows for copper traces to run under the fastener which better utilizes space on the board
- Enhanced PC Board performance due to cut out of the fastener that allows for localized heat up of the area in contact with the solder

New

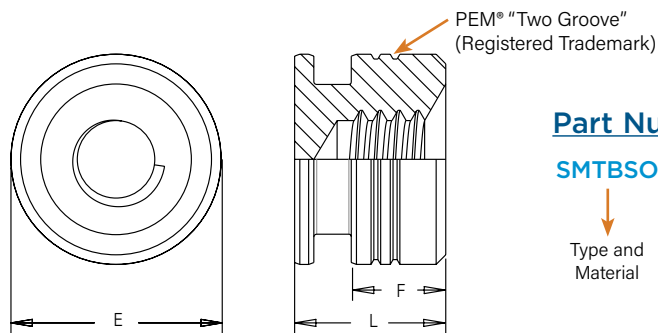

Part Number Designation

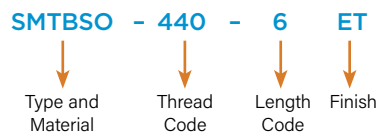

All dimensions are in inches.


| Unified | Thread Size | Type | Thread Code | Length Code "L" ±.005 (Length code in 32nds of an inch) | E ±.005 | ØD Min. Solder Pad | F Min. |
|---------|--------------------|--------|-------------|--|------------|-----------------------|-----------|
| | | | | .187 | | | |
| | .112-40 (#4-40) | SMTBSO | 440 | 6 | .219 | .244 | .125 |

All dimensions are in millimeters.


| Metric | Thread Size | Type | Thread Code | Length Code "L" ±0.13 (Length code in millimeters) | E ±0.13 | ØD Min. Solder Pad | F Min. |
|--------|-------------|----------|-------------|---|------------|-----------------------|-----------|
| | | M3 x 0.5 | SMTBSO | M3 | 4 | 5.56 | 6.2 |

Number of Parts per Reel

| Part Number | Number of Parts per Reel |
|----------------|--------------------------|
| SMTBSO-440-6ET | 900 |
| SMTBSO-M3-4ET | 1000 |

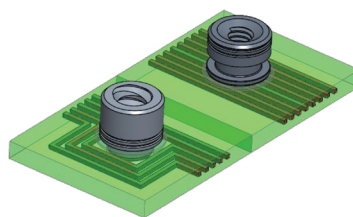


The SMTBSO™ fastener does not require a through hole allowing for copper traces to run under the fastener which better utilizes space on the board.




PC Board with through hole. PC Board without through hole.


SMTSO™/SMTSOB™ Reelfast® Surface Mount Nuts And Spacers/Standoffs

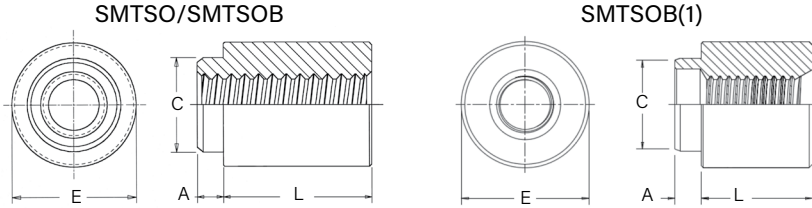

Thread/thru hole sizes 2-56, 4-40, 6-32, 8-32, 116, 143, M2, M2.5, M3, M3.5, M4, 3.1, 3.6, and 4.2




PEM® SMTSO and SMTSOB standoffs may be marked with either our "Two Groove" or "3 Dimple" registered trademarks.


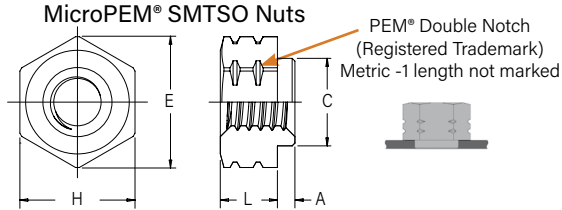


Thread sizes 080, S1, S1.2, S1.4 and M1.6

Part Number Designation

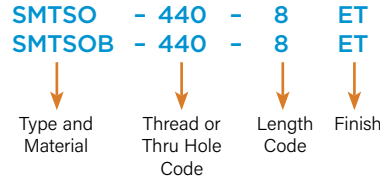

Stencil Masking Examples



NOTE: Standoffs are available on special order without a pilot that do not require a thru hole for installation. Contact techsupport@pemnet.com for more information.

All dimensions are in inches.

| Unified | Thread Size | Thru Hole +0.04 -0.03 | Type | | Thread or Thru Hole Code | Length Code "L" ±0.05 (Length code in 32nds of an inch) | | | | Min. Sheet Thickness | A Max. | C Max. | E | | H Nom. | ØH Hole Size In Sheet +0.03 -0.00 | ØD Min. Solder Pad |
|---------|-----------------|--------------------------|-------------------|--------|--------------------------|--|------|------------------|-------------------|----------------------|--------|--------|------|-------|--------|--------------------------------------|--------------------|
| | | | Fastener Material | | | .062 | .125 | .250 | .375 | | | | Ref. | ±0.05 | | | |
| | | | Steel | Brass | | | | | | | | | | | | | |
| | .060-80 (#0-80) | - | SMTSO | - | 080 | 2 | 4 | - | - | .020 | .019 | .095 | .144 | .125 | .098 | .165 | |
| | .086-56 (#2-56) | - | SMTSO | SMTSOB | 256 | 2 | 4 | 8 ⁽¹⁾ | 12 ⁽¹⁾ | .060 | .060 | .142 | .219 | - | .147 | .244 | |
| | .112-40 (#4-40) | - | SMTSO | SMTSOB | 440 | 2 | 4 | 8 ⁽¹⁾ | 12 ⁽¹⁾ | .060 | .060 | .161 | .219 | - | .166 | .244 | |
| | .138-32 (#6-32) | - | SMTSO | SMTSOB | 632 | 2 | 4 | 8 ⁽¹⁾ | 12 ⁽¹⁾ | .060 | .060 | .208 | .281 | - | .213 | .306 | |
| | .164-32 (#8-32) | - | SMTSO | SMTSOB | 832 | 2 | 4 | 8 ⁽¹⁾ | 12 ⁽¹⁾ | .060 | .060 | .245 | .344 | - | .250 | .369 | |
| | - | .116 | SMTSO | SMTSOB | 116 | 2 | 4 | 8 | 12 | .060 | .060 | .161 | .219 | - | .166 | .244 | |
| | - | .143 | SMTSO | SMTSOB | 143 | 2 | 4 | 8 | 12 | .060 | .060 | .208 | .281 | - | .213 | .306 | |

All dimensions are in millimeters.

| Metric | Thread Size x Pitch | Thru Hole +0.10 -0.08 | Type | | Thread or Thru Hole Code | Length Code "L" ±0.13 (Length code in millimeters) | | | | | | Min. Sheet Thickness | A Max. | C Max. | E | | H Nom. | ØH Hole Size In Sheet +0.08 | ØD Min. Solder Pad | |
|--------|---------------------|--------------------------|-------------------|--------|--------------------------|---|---|---|------------------|------------------|------------------|----------------------|--------|--------|------|------|--------|--------------------------------|--------------------|-------|
| | | | Fastener Material | | | 1 | 2 | 3 | 4 | 6 | 8 | | | | 10 | Ref. | | | | ±0.13 |
| | | | Steel | Brass | | | | | | | | | | | | | | | | |
| | S1 | - | SMTSO | - | M1 | 1 | 2 | 3 | - | - | - | 0.5 | 0.48 | 2.41 | 3.66 | - | 3.18 | 2.5 | 4.19 | |
| | S1.2 | - | SMTSO | - | M1.2 | 1 | 2 | 3 | - | - | - | 0.5 | 0.48 | 2.41 | 3.66 | - | 3.18 | 2.5 | 4.19 | |
| | S1.4 | - | SMTSO | - | M1.4 | 1 | 2 | 3 | - | - | - | 0.5 | 0.48 | 2.41 | 3.66 | - | 3.18 | 2.5 | 4.19 | |
| | M1.6 x 0.35 | - | SMTSO | - | M1.6 | 1 | 2 | 3 | - | - | - | 0.5 | 0.48 | 2.41 | 3.66 | - | 3.18 | 2.5 | 4.19 | |
| | M2 x 0.4 | - | SMTSO | SMTSOB | M2 | - | 2 | 3 | 4 ⁽¹⁾ | 6 ⁽¹⁾ | 8 ⁽¹⁾ | 10 ⁽¹⁾ | 1.53 | 1.53 | 3.6 | - | 5.56 | - | 3.73 | 6.2 |
| | M2.5 x 0.45 | - | SMTSO | SMTSOB | M2.5 | - | 2 | 3 | 4 ⁽¹⁾ | 6 ⁽¹⁾ | 8 ⁽¹⁾ | 10 ⁽¹⁾ | 1.53 | 1.53 | 4.09 | - | 5.56 | - | 4.22 | 6.2 |
| | M3 x 0.5 | - | SMTSO | SMTSOB | M3 | - | 2 | 3 | 4 ⁽¹⁾ | 6 ⁽¹⁾ | 8 ⁽¹⁾ | 10 ⁽¹⁾ | 1.53 | 1.53 | 4.09 | - | 5.56 | - | 4.22 | 6.2 |
| | M3.5 x 0.6 | - | SMTSO | SMTSOB | M3.5 | - | 2 | 3 | 4 ⁽¹⁾ | 6 ⁽¹⁾ | 8 ⁽¹⁾ | 10 ⁽¹⁾ | 1.53 | 1.53 | 5.28 | - | 7.14 | - | 5.41 | 7.77 |
| | M4 x 0.7 | - | SMTSO | SMTSOB | M4 | - | 2 | 3 | 4 | 6 ⁽¹⁾ | 8 ⁽¹⁾ | 10 ⁽¹⁾ | 1.53 | 1.53 | 6.22 | - | 8.74 | - | 6.35 | 9.37 |
| | - | 3.1 | SMTSO | SMTSOB | 3.1 | - | 2 | 3 | 4 | 6 | 8 | 10 | 1.53 | 1.53 | 4.09 | - | 5.56 | - | 4.22 | 6.2 |
| | - | 3.6 | SMTSO | SMTSOB | 3.6 | - | 2 | 3 | 4 | 6 | 8 | 10 | 1.53 | 1.53 | 5.28 | - | 7.14 | - | 5.41 | 7.77 |
| | - | 4.2 | SMTSO | SMTSOB | 4.2 | - | 2 | 3 | 4 | 6 | 8 | 10 | 1.53 | 1.53 | 6.22 | - | 8.74 | - | 6.35 | 9.37 |

(1) SMTSOB fasteners with this length code have a shank counterbore.

Number Of Parts Per Reel / Pitch (MM) For Each Size

| Thread/Thru-Hole Size | Length Code | | | | | | | |
|------------------------------|-------------|-----------|-----------|-----------|----------|----------|----------|----------|
| | 1 | 2 | 3 | 4 | 6 | 8 | 10 | 12 |
| 080 | - | 3500 / 8 | - | 2000 / 8 | - | - | - | - |
| 256, 440, 632, 116, 143 | - | 1500 / 12 | - | 1000 / 12 | - | 650 / 12 | - | 300 / 16 |
| 832 | - | 1100 / 16 | - | 800 / 16 | - | 500 / 16 | - | 300 / 16 |
| M1, M1.2, M1.4, M1.6 | 3500 / 8 | 2500 / 8 | 2000 / 8 | - | - | - | - | - |
| M2, M2.5, M3, M3.5, 3.1, 3.6 | - | 1500 / 12 | 1000 / 12 | 900 / 12 | 650 / 12 | 375 / 16 | 300 / 16 | - |
| M4, 4.2 | - | 1100 / 16 | 800 / 16 | 675 / 16 | 500 / 16 | 375 / 16 | 300 / 16 | - |




Packaged on 330 mm recyclable reels. Tape width is 24 mm. Reels conform to EIA-481.



A polyimide patch is supplied to allow for reliable vacuum pickup. Fasteners are also available without a patch which may provide a lower cost alternative, depending on your installation methods/requirements.

SMTSS™ Reelfast® Snap-Top® Standoffs

NOTE: REELFAST® SNAP-TOP® SMTSS™ standoffs are for on-only applications. For removal applications, mounting hole A can be increased to reduce removal force.

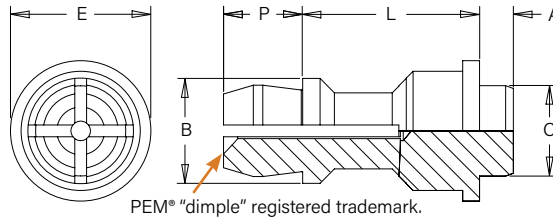


Part Number Designation

SMTSS S - 156 - 12 ET

↓ ↓ ↓ ↓ ↓

Type Material Top Board Mounting Hole A Diameter Code Length Code Finish

Stencil Masking Examples



All dimensions are in inches.


| Unified | Top Board Mounting Hole A Diameter Code | Type and Material | Length Code "L" ±.005 (Length Code in 32nds of an inch) | | Min. Sheet Thickness | A Max. | C Max. | E ±.005 | B ±.005 | P ±.005 | ØH Hole Size in Sheet +.003 -.000 | ØD Min. Solder Pad |
|---------|---|-------------------|--|------|----------------------|--------|--------|---------|---------|---------|-----------------------------------|--------------------|
| | | | .250 | .375 | | | | | | | | |
| | 156 | SMTSSS | 8 | 12 | .060 | .060 | .161 | .250 | .188 | .141 | .166 | .276 |

All dimensions are in millimeters.

| Metric | Top Board Mounting Hole A Diameter Code | Type and Material | Length Code "L" ±0.13 (Length Code in millimeters) | | | Min. Sheet Thickness | A Max. | C Max. | E ±0.13 | B ±0.13 | P ±0.13 | ØH Hole Size in Sheet +0.08 | ØD Min. Solder Pad |
|--------|---|-------------------|---|---|----|----------------------|--------|--------|---------|---------|---------|-----------------------------|--------------------|
| | | | 6 | 8 | 10 | | | | | | | | |
| | 4MM | SMTSSS | 6 | 8 | 10 | 1.53 | 1.53 | 4.09 | 6.35 | 4.8 | 3.58 | 4.22 | 7 |


Number Of Parts Per Reel

| Type, Material and Size | Length Code / Number of Parts per Reel | | |
|-------------------------|--|-----------|-----------|
| SMTSSS-156 | -8 / 280 | -12 / 220 | |
| SMTSSS-4MM | -6 / 300 | -8 / 250 | -10 / 200 |



Packaged on 330 mm recyclable reels. Tape width is 24 mm. Supplied with polyimide patch for vacuum pick up. Reels conform to EIA-481.

SMTSS™ Application Data

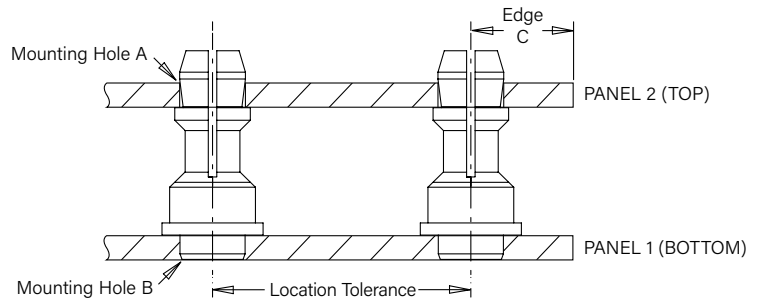

All dimensions are in inches.





| Unified | Type | Panel 1 | | | | | Panel 2 | | | | |
|---------|-------|---------------|------------------------------------|----------------|----------------|--------------------|---------------|---------------------------------|-------------------|-----------------|----------------------|
| | | Hardness Max. | Bottom Mounting Hole B +.003 -.000 | Panel Material | Thickness Min. | Location Tolerance | Hardness Max. | Top Mounting Hole A +.003 -.000 | Panel Material | Thickness Range | Edge Distance C Min. |
| | SMTSS | No Limit | .166 | PC board | .060 | ±.005 | No Limit | .156 | PC board or Metal | .040 - .070 | .100 |

All dimensions are in millimeters.


| Metric | Type | Panel 1 | | | | | Panel 2 | | | | |
|--------|-------|---------------|------------------------------|----------------|----------------|--------------------|---------------|---------------------------|-------------------|-----------------|----------------------|
| | | Hardness Max. | Bottom Mounting Hole B +0.08 | Panel Material | Thickness Min. | Location Tolerance | Hardness Max. | Top Mounting Hole A +0.08 | Panel Material | Thickness Range | Edge Distance C Min. |
| | SMTSS | No Limit | 4.22 | PC board | 1.53 | ±0.13 | No Limit | 4 | PC board or Metal | 1 - 1.8 | 2.54 |

SMTSK™ Reelfast® Keyhole® Standoffs


- Unique barrel design allows for quick attachment and detachment.
- Makes horizontal or vertical component mounting possible.

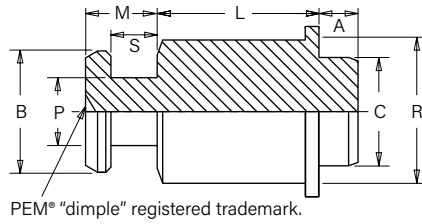

Part Number Designation

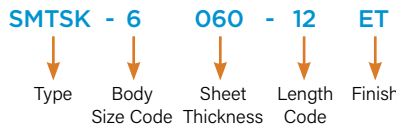

Stencil Masking Examples



All dimensions are in inches.

| Unified | Type | Body Size - Sheet Code | Length "L" ± .005 (Length Code in 32nds of an inch) | | | Min. Sheet Thickness | A Max. | C Max. | E ±.005 | B ±.003 | P ±.003 | R Max. | S ±.003 | M Max. | ØH Hole Size in Sheet +.003 -.000 | ØD Min. Solder Pad |
|---------|------|------------------------|--|------|------|----------------------|--------|--------|---------|---------|---------|--------|---------|--------|-----------------------------------|--------------------|
| | | | .125 | .250 | .375 | | | | | | | | | | | |
| SMTSK | 6060 | | 4 | 8 | 12 | .060 | .060 | .161 | .250 | .177 | .099 | .212 | .068 | .108 | .166 | .276 |


All dimensions are in millimeters.

| Metric | Type | Body Size - Sheet Code | Length "L" ± 0.13 (Length Code in millimeters) | | | | | Min. Sheet Thickness | A Max. | C Max. | E ±0.13 | B ±0.08 | P ±0.08 | R Max. | S ±0.08 | M Max. | ØH Hole Size in Sheet +0.08 | ØD Min. Solder Pad |
|--------|------|------------------------|---|---|---|---|----|----------------------|--------|--------|---------|---------|---------|--------|---------|--------|-----------------------------|--------------------|
| | | | 3 | 4 | 6 | 8 | 10 | | | | | | | | | | | |
| SMTSK | 61.5 | | 3 | 4 | 6 | 8 | 10 | 1.53 | 1.53 | 4.09 | 6.35 | 4.5 | 2.51 | 5.39 | 1.73 | 2.75 | 4.22 | 7 |

Number Of Parts Per Reel



| Part Number | Length Code "L" | | |
|-------------|-----------------|------|------|
| | .125 | .250 | .375 |
| SMTSK-6060 | 4 | 8 | 12 |
| | 630 | 440 | 230 |

| Part Number | Length Code "L" | | | | |
|-------------|-----------------|-----|-----|-----|-----|
| | 3 | 4 | 6 | 8 | 10 |
| SMTSK-61.5 | 640 | 540 | 440 | 260 | 220 |

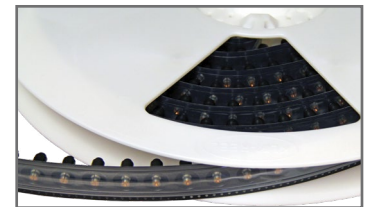

Packaged on 13" recyclable reels. Tape width is 24mm and 16mm. Pitch is 16mm and 12mm. Reels conform to EIA-481.

Application Data

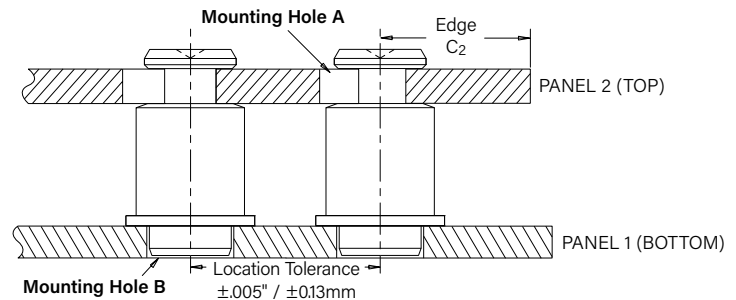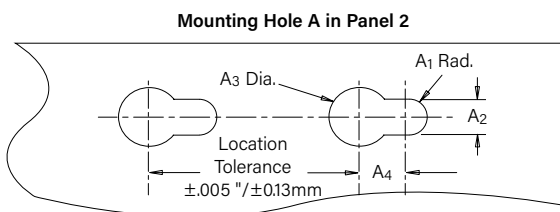

All dimensions are in inches.

| Unified | Type | Hardness Max. | Panel 1 | | | | Panel 2 | | | | | | |
|---------|------|---------------|------------------------------------|----------------|----------------|--------------------|---------------------|----------|----------|---------|----------------|-----------------|-----------------------|
| | | | Bottom Mounting Hole B +.003 -.000 | Panel Material | Thickness Min. | Location Tolerance | Top Mounting Hole A | | | | Panel Material | Thickness Range | Edge Distance C2 Min. |
| | | | | | | | A1 Nom. | A2 ±.003 | A3 ±.003 | A4 Min. | | | |
| SMTSK | | No Limit | .166 | PC board | .060 | ±.005 | .059 | .118 | .197 | .148 | ANY | .057 - .064 | .160 |

All dimensions are in millimeters.

| Metric | Type | Hardness Max. | Panel 1 | | | | Panel 2 | | | | | | |
|--------|------|---------------|------------------------------|----------------|----------------|--------------------|---------------------|----------|----------|---------|----------------|-----------------|-----------------------|
| | | | Bottom Mounting Hole B +0.08 | Panel Material | Thickness Min. | Location Tolerance | Top Mounting Hole A | | | | Panel Material | Thickness Range | Edge Distance C2 Min. |
| | | | | | | | A1 Nom. | A2 ±0.08 | A3 ±0.08 | A4 Min. | | | |
| SMTSK | | No Limit | 4.22 | PC board | 1.53 | ±0.13 | 1.5 | 3 | 5 | 3.75 | ANY | 1.45 - 1.62 | 4.1 |

Note About Plated And Unplated Mounting Holes For Broaching Fasteners

Broaching and broach/flare types are designed for unplated mounting hole applications. If used in plated mounting holes, the stresses involved can damage the plating, push out the plating entirely, or break any traces inside the board that might be connected to the plated hole. When installing into non-plated mounting holes there may even be issues with delamination, measeling or crazing in some instances.


Increasing the mounting hole size +.005" to +.008" / +0.13 mm to +0.2 mm may relieve these conditions. If increasing the mounting hole does not correct the issue then we recommend our surface-mount type fasteners.

It is always recommended that you try the fasteners in your specific application before full production begins. We are happy to provide samples for this purpose.




General recommendations for "Keep Out" areas are the same as our "Min. Distance Hole C/L to Edge" dimensions stated in the dimensional charts of our bulletin.

KF2™/KFS2™ Broaching Nuts

- Can be used in aluminum, acrylic, casting and polycarbonate components



Part Number Designation



All dimensions are in inches.


| | Thread Size | Type | | Thread Code | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +.003 -.000 | C ±.003 | E ±.005 | T ±.005 | Min. Dist. Hole C/L to Edge (1) |
|----------------|------------------|--------------|-----------------|-------------|----------------|----------------------|--------------------------------|---------|---------|---------|---------------------------------|
| | | Carbon Steel | Stainless Steel | | | | | | | | |
| Unified | .086-56 (#2-56) | KF2 | KFS2 | 256 | .060 | .060 | .147 | .165 | .219 | .065 | 0.16 |
| | .112-40 (#4-40) | KF2 | KFS2 | 440 | .060 | .060 | .166 | .184 | .219 | .065 | 0.17 |
| | .138-32 (#6-32) | KF2 | KFS2 | 632 | .060 | .060 | .213 | .231 | .281 | .065 | 0.22 |
| | .164-32 (#8-32) | KF2 | KFS2 | 832 | .060 | .060 | .250 | .268 | .344 | .096 | 0.25 |
| | .190-32 (#10-32) | KF2 | KFS2 | 032 | .060 | .060 | .272 | .290 | .375 | .127 | 0.28 |

All dimensions are in millimeters.



| | Thread Size x Pitch | Type | | Thread Code | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +0.08 | C ±0.08 | E ±0.13 | T ±0.13 | Min. Dist. Hole C/L to Edge (1) |
|---------------|---------------------|--------------|-----------------|-------------|----------------|----------------------|--------------------------|---------|---------|---------|---------------------------------|
| | | Carbon Steel | Stainless Steel | | | | | | | | |
| Metric | M2 x 0.4 | KF2 | KFS2 | M2 | 1.53 | 1.53 | 3.73 | 4.19 | 5.56 | 1.5 | 4.2 |
| | M2.5 x 0.45 | KF2 | KFS2 | M2.5 | 1.53 | 1.53 | 4.22 | 4.68 | 5.56 | 1.5 | 4.4 |
| | M3 x 0.5 | KF2 | KFS2 | M3 | 1.53 | 1.53 | 4.22 | 4.68 | 5.56 | 1.5 | 4.4 |
| | M4 x 0.7 | KF2 | KFS2 | M4 | 1.53 | 1.53 | 6.4 | 6.81 | 8.74 | 2 | 6.4 |
| | M5 x 0.8 | KF2 | KFS2 | M5 | 1.53 | 1.53 | 6.9 | 7.37 | 9.53 | 3 | 7.1 |

(1) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KFE™/KFSE™ Broaching Standoffs



Part Number Designation

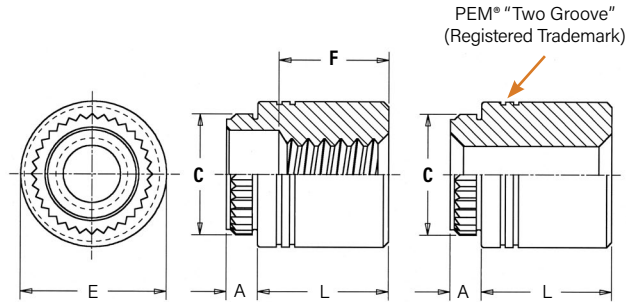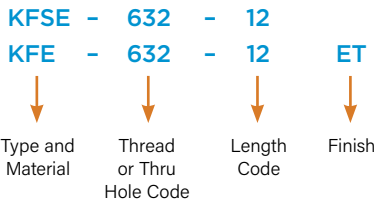

All dimensions are in inches.


| Unified | Thread Size | Thru Hole +.004 -.003 | Type | | Thread or Thru Hole Code | Length "L" ±.005 (Length Code is in 32nds of an inch) | | | | | | | | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +.003 -.000 | C ±.003 | E ±.005 | Min. Dist. Hole C/L to Edge (2) |
|--|-----------------|-----------------------------|--------------|-----------------|--------------------------|--|------|------|-------------|------|-------------|-------------|-------------|----------------|----------------------|-----------------------------------|---------|---------|---------------------------------|
| | | | Carbon Steel | Stainless Steel | | .125 | .250 | .375 | .500 | .625 | (1) .750 | (1) .875 | (1) 1.00 | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | .112-40 (#4-40) | - | KFE | KFSE | 440 | 4 | 8 | 12 | 16 | 20 | 24 | - | - | .060 | .060 | .166 | .184 | .219 | .17 |
| | .138-32 (#6-32) | - | KFE | KFSE | 632 | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | .060 | .060 | .213 | .231 | .281 | .22 |
| | - | .116 | KFE | KFSE | 116 | 4 | 8 | 12 | 16 | 20 | 24 | - | - | .060 | .060 | .166 | .184 | .219 | .17 |
| | - | .143 | KFE | KFSE | 143 | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | .060 | .060 | .213 | .231 | .281 | .22 |
| "F" Minimum Thread Length (Where Applicable) | | | | | | Full | | | .375 ± .016 | | | .375 Blind | | | | | | | |

All dimensions are in millimeters.



| Metric | Thread Size x Pitch | Thru Hole +.010 -.008 | Type | | Thread or Thru Hole Code | Length "L" ±0.13 (Length Code is in millimeters) | | | | | | | | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +0.08 | C ±0.08 | E ±0.13 | Min. Dist. Hole C/L to Edge (2) |
|--|---------------------|-----------------------------|--------------|-----------------|--------------------------|---|---|---|---|----|----|-----|----|----------------|----------------------|-----------------------------|---------|---------|---------------------------------|
| | | | Carbon Steel | Stainless Steel | | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | | | | | | |
| | | | | | | | | | | | | | | | | | | | |
| | M3 x 0.5 | - | KFE | KFSE | M3 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 1.53 | 1.53 | 4.22 | 4.68 | 5.56 | 4.4 |
| | - | 3.6 | KFE | KFSE | 3.6 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 1.53 | 1.53 | 5.41 | 5.87 | 7.14 | 5.5 |
| | - | 4.2 | KFE | KFSE | 4.2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 1.53 | 1.53 | 6.4 | 6.81 | 8.74 | 7.1 |
| "F" Minimum Thread Length (Where Applicable) | | | | | | Full | | | | | | 9.5 | | | | | | | |

- (1) Blind at shank end with .375" minimum thread length from head end.
- (2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KFB3™ Broach/Flare-Mount Standoffs



Part Number Designation

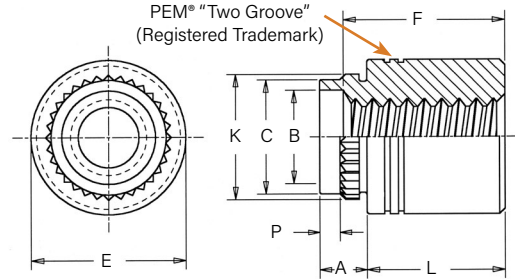

All dimensions are in inches.


| Unified | Thread Size | Type | Thread Code | Length Code "L" ±.005 (Length code in 32nds of an inch) | | | | | | | | | | A (shank) Max. | Sheet Thickness | Hole Size in Sheet +.005 -.001 | B ±.003 | C Max. | E ±.005 | K ±.003 | P ±.010 | Min. Dist. Hole C/L to Edge (2) |
|--|---------------------|------|-------------|--|------|------|------|------|------|------|------|-------------|-------------|----------------------|--------------------|---|------------|-----------|------------|------------|------------|--|
| | | | | .062 | .125 | .187 | .250 | .312 | .375 | .500 | .625 | .750 (1) | 1.00 (1) | | | | | | | | | |
| | .112-40 (#4-40) | KFB3 | 440 | 2 | 4 | 6 | 8 | 10 | 12 | 16 | 20 | — | — | .09 | .050-.065 | .166 | .122 | .165 | .219 | .179 | .040 | .17 |
| | .138-32 (#6-32) | KFB3 | 632 | 2 | 4 | 6 | 8 | 10 | 12 | 16 | 20 | 24 | 32 | .09 | .050-.065 | .213 | .171 | .212 | .280 | .226 | .040 | .22 |
| | .190-32 (#10-32) | KFB3 | 032 | 2 | 4 | 6 | 8 | 10 | 12 | 16 | 20 | 24 | 32 | .09 | .050-.065 | .272 | .128 | .271 | .375 | .285 | .040 | .275 |
| | .250-32 (1/4-20) | KFB3 | 0420 | 2 | 4 | 6 | 8 | 10 | 12 | 16 | 20 | 24 | 32 | .09 | .050-.065 | .335 | .183 | .331 | .437 | .348 | .040 | .335 |
| "F" Min. Thread Length (Where Applicable) | | | | Full | | | | | | | | | .375 Blind | | | | | | | | | |

All dimensions are in millimeters.



| Metric | Thread Size x Pitch | Type | Thread Code | Length Code "L" ±0.13 (Length code in millimeters) | | | | | | | | | | A (shank) Max. | Sheet Thickness | Hole Size in Sheet +0.13 -0.03 | B ±0.08 | C Max. | E ±0.13 | K ±0.08 | P ±0.25 | Min. Dist. Hole C/L to Edge (2) |
|---|---------------------|------|-------------|---|---|---|---|---|----|----|----|----|------|----------------------|--------------------|---|------------|-----------|------------|------------|------------|--|
| | | | | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | | | | | | | | | | |
| | M3 x 0.5 | KFB3 | M3 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 2.29 | 1.27-1.65 | 4.22 | 3.23 | 4.2 | 5.56 | 4.55 | 1 | 4.33 | |
| | M4 x 0.7 | KFB3 | M4 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 2.29 | 1.27-1.65 | 6.4 | 5.23 | 6.33 | 8.74 | 6.68 | 1 | 6.36 | |
| | M5 x 0.8 | KFB3 | M5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 2.29 | 1.27-1.65 | 6.9 | 5.8 | 6.86 | 9.53 | 7.23 | 1 | 7 | |
| | M6 x 1 | KFB3 | M6 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 2.29 | 1.27-1.65 | 8.5 | 7.2 | 8.4 | 11.1 | 8.83 | 1 | 8.5 | |
| "F" Minimum Thread Length (Where Applicable) | | | | Full | | | | | | | | | 9.5 | | | | | | | | | |

- (1) Blind at shank end with .375" minimum thread length from head end.
- (2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KSSB™ Broaching Snap-Top® Standoffs



Part Number Designation

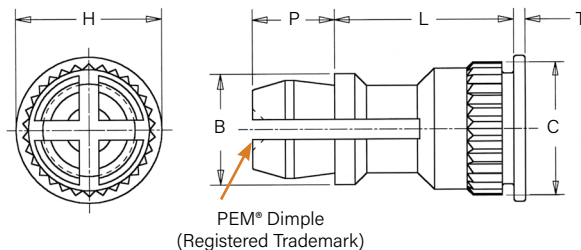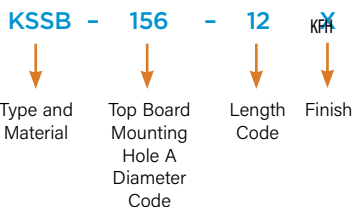


All dimensions are in inches.

| Unified | Type | Top Board Mounting Hole A Diameter Code | Length "L" ±.005 (Length Code is in 32nds of an inch) | | | | | | | | | | B ±.005 | C ±.003 | H ±.005 | P ±.005 | T ±.005 |
|---------|------|---|--|------|------|------|------|------|------|------|------|------|---------|---------|---------|---------|---------|
| | | | .250 | .312 | .375 | .437 | .500 | .562 | .625 | .750 | .875 | 1.00 | | | | | |
| | KSSB | 156 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 28 | 32 | .188 | .226 | .250 | .141 | .020 |

All dimensions are in millimeters.

| Metric | Type | Top Board Mounting Hole A Diameter Code | Length "L" ±0.13 (Length Code is in millimeters) | | | | | | | | | | B ±0.13 | C ±0.08 | H ±0.13 | P ±0.13 | T ±0.13 |
|--------|------|---|---|----|----|----|----|----|----|----|----|-----|---------|---------|---------|---------|---------|
| | | | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | | | | | | |
| | KSSB | 4MM | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | 4.8 | 5.74 | 6.35 | 3.58 | 0.51 | |

KSSB™ Application Data

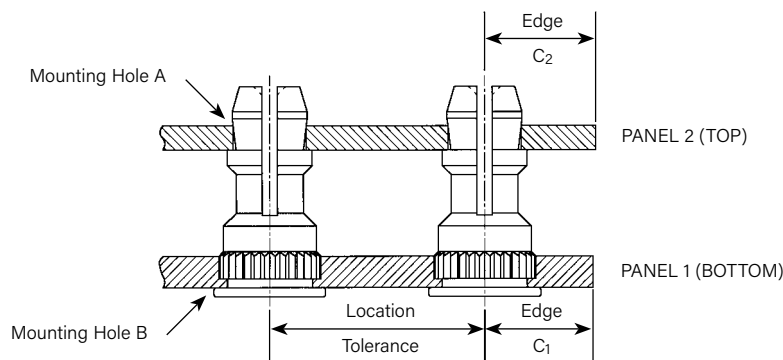

All dimensions are in inches.


| Unified | Type | Panel 1 | | | | | | Panel 2 | | | | |
|---------|------|-------------------|------------------------------------|----------------|----------------|-----------------------------------|--------------------|---------------|---------------------------------|-------------------|---------------------|-----------------------------------|
| | | Hardness Max. (1) | Bottom Mounting Hole B +.003 -.000 | Panel Material | Thickness Min. | Edge Distance C ₁ Min. | Location Tolerance | Hardness Max. | Top Mounting Hole A +.003 -.000 | Panel Material | Thickness Range (2) | Edge Distance C ₂ Min. |
| | KSSB | HRB 65 / HB 116 | .213 | PC board | .050 | .220 | ±.005 | No Limit | .156 | PC board or Metal | .040 - .070 | .100 |

All dimensions are in millimeters.

| Metric | Type | Panel 1 | | | | | | Panel 2 | | | | |
|--------|------|-------------------|------------------------------|----------------|----------------|-----------------------------------|--------------------|---------------|---------------------------|-------------------|---------------------|-----------------------------------|
| | | Hardness Max. (1) | Bottom Mounting Hole B +0.08 | Panel Material | Thickness Min. | Edge Distance C ₁ Min. | Location Tolerance | Hardness Max. | Top Mounting Hole A +0.08 | Panel Material | Thickness Range (2) | Edge Distance C ₂ Min. |
| | KSSB | HRB 65 / HB 116 | 5.41 | PC board | 1.27 | 5.59 | ±0.13 | No Limit | 4 | PC board or Metal | 1 - 1.8 | 2.54 |

(1) HRB - Hardness Rockwell "B" Scale, HB - Hardness Brinell.
 (2) Available for thicker boards on special order.

SMTPF LSM™ ReelFast® Surface Mount Captive Panel Screws

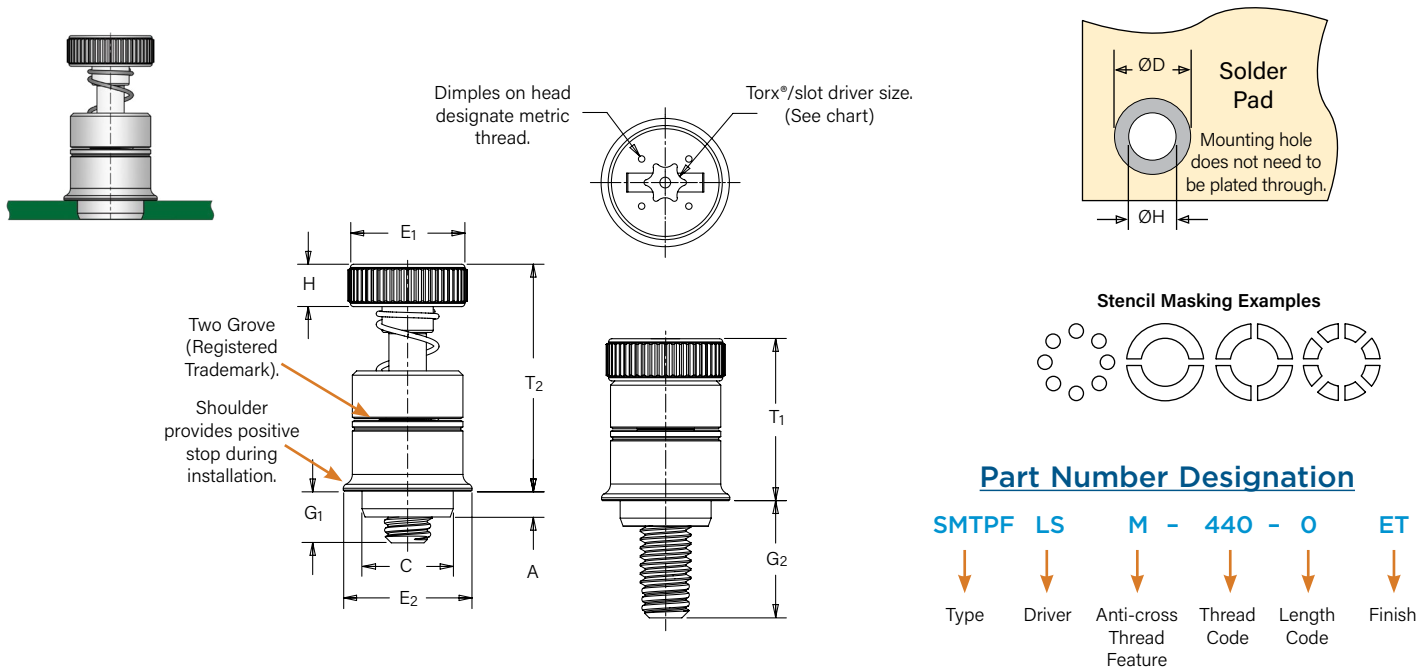

All dimensions are in inches.

| Unified | Thread Size | Type | Thread Code | Screw Length Code | A (Shank) Max. | Min. Sheet Thickness | C Max. | E1 ±.010 | E2 Nom | G1 ±.025 | G2 ±.025 | H ±.010 | T1 Nom. | T2 Nom. | ØK Hole Size in Sheet +.003 -.000 | ØD Min. Solder Pad | Driver Size | |
|-----------------|-----------------|-----------|-------------|-------------------|----------------|----------------------|--------|----------|--------|----------|----------|---------|---------|---------|-----------------------------------|--------------------|-------------|-----|
| | .112-40 (#4-40) | SMTPF LSM | 440 | 0 | .063 | .063 | .215 | .280 | .300 | | .040 | .210 | .100 | .38 | .55 | .220 | .340 | T15 |
| | | | | 1 | | | | | | | .100 | .270 | | | | | | |
| .138-32 (#6-32) | SMTPF LSM | 632 | 0 | .063 | .063 | .247 | .310 | .320 | | .040 | .240 | .100 | .42 | .62 | .252 | .400 | T15 | |
| | | | 1 | | | | | | | .100 | .300 | | | | | | | |

All dimensions are in millimeters.

| Metric | Thread Size | Type | Thread Code | Screw Length Code | A (Shank) Max. | Min. Sheet Thickness | C Max. | E1 ±0.25 | E2 Nom | G1 ±0.64 | G2 ±0.64 | H ±0.25 | T1 Nom. | T2 Nom. | ØK Hole Size in Sheet +0.08 | ØD Min. Solder Pad | Driver Size | |
|------------|-------------|-----------|-------------|-------------------|----------------|----------------------|--------|----------|--------|----------|----------|---------|---------|---------|-----------------------------|--------------------|-------------|-----|
| | M3 x 0.5 | SMTPF LSM | M3 | 0 | 1.6 | 1.6 | 5.46 | 7 | 76 | | 1 | 5.3 | 2.5 | 9.6 | 14 | 5.6 | 8.6 | T15 |
| | | | | 1 | | | | | | | 2.5 | 6.8 | | | | | | |
| M3.5 x 0.6 | SMTPF LSM | M3.5 | 0 | 1.6 | 1.6 | 6.27 | 79 | 813 | | 1 | 6.1 | 2.5 | 10.7 | 15.7 | 6.4 | 10.2 | T15 | |
| | | | 1 | | | | | | | 2.5 | 7.62 | | | | | | | |

Number Of Parts Per Reel

| Thread Size | Parts Per Reel |
|-------------|----------------|
| 440 | 200 |
| 632 | 150 |
| M3 | 200 |
| M3.5 | 150 |







Packaged on 330 mm recyclable reels. Tape width is 24 mm. Supplied with polyimide patch for vacuum pick up. Reels conform to EIA-481.

SMPF™ ReelFast® Surface Mount Captive Panel Screws

Patented.

When Assembled

Spring action of plastic "fingers" holds screw in retracted position.

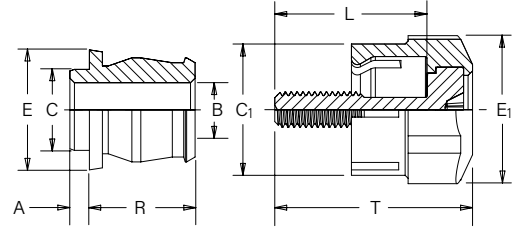

All dimensions are in inches.

| Unified | Thread Size | Screw Part Number | | | Retainer Part Number | Assembly Dimensions | | | | | Screw Dimensions | | | | Retainer Dimensions | | | | | |
|---------|-------------------|-------------------|-------------|-------------------|----------------------|---------------------|---------|---------------------|---------------------|--------------------|----------------------|----------------------|---------|--------|---------------------|-------------------|---------|--------|--------|---------|
| | | Type | Thread Code | Screw Length Code | | G ±.025 | P ±.025 | T ₁ Nom. | T ₂ Nom. | Total Radial Float | C ₁ ±.010 | E ₁ ±.010 | L ±.015 | T Nom. | A (Shank) Max. | Min. Sheet Thick. | B ±.003 | C Max. | E Nom. | R ±.005 |
| | .112-.40 (#4-.40) | PSHP | 440 | 0 | SMTPR-6-1 | .188 | .000 | .478 | .646 | .015 | .440 | .542 | .510 | .663 | .060 | .060 | .167 | .249 | .375 | .325 |
| | | | | 1 | | .248 | .026 | | | | | | .570 | .723 | | | | | | |
| | .138-.32 (#6-.32) | PSHP | 632 | 0 | SMTPR-6-1 | .188 | .000 | .478 | .646 | .020 | .440 | .542 | .510 | .663 | .060 | .060 | .167 | .249 | .375 | .325 |
| | | | | 1 | | .248 | .026 | | | | | | .570 | .723 | | | | | | |


All dimensions are in millimeters.

| Metric | Thread Size x Pitch | Screw Part Number | | | Retainer Part Number | Assembly Dimensions | | | | | Screw Dimensions | | | | Retainer Dimensions | | | | | |
|--------|---------------------|-------------------|-------------|-------------------|----------------------|---------------------|---------|---------------------|---------------------|--------------------|----------------------|----------------------|---------|--------|---------------------|-------------------|---------|--------|--------|---------|
| | | Type | Thread Code | Screw Length Code | | G ±.064 | P ±.064 | T ₁ Nom. | T ₂ Nom. | Total Radial Float | C ₁ ±0.25 | E ₁ ±0.25 | L ±0.38 | T Nom. | A (Shank) Max. | Min. Sheet Thick. | B ±0.08 | C Max. | E Nom. | R ±0.13 |
| | M3 x 0.5 | PSHP | M3 | 0 | SMTPR-6-1 | 4.78 | 0 | 12.14 | 16.41 | .38 | 11.18 | 13.77 | 12.95 | 16.84 | 1.53 | 1.53 | 4.24 | 6.33 | 9.53 | 8.26 |
| | | | | 1 | | 6.3 | .66 | | | | | | 14.48 | 18.36 | | | | | | |
| | M3.5 x 0.6 | PSHP | M3.5 | 0 | SMTPR-6-1 | 4.78 | 0 | 12.14 | 16.41 | .51 | 11.18 | 13.77 | 12.95 | 16.84 | 1.53 | 1.53 | 4.24 | 6.33 | 9.53 | 8.26 |
| | | | | 1 | | 6.3 | .66 | | | | | | 14.48 | 18.36 | | | | | | |


RETAINER — Packaged on 330 mm recyclable reels of 400 pieces. Tape width is 24 mm. Supplied with Kapton® patch for vacuum pick up. Reels conform to EIA-481.

SCREW — Packaged in bags. Retainers and screws are sold separately.

Part Number Designation For Screw


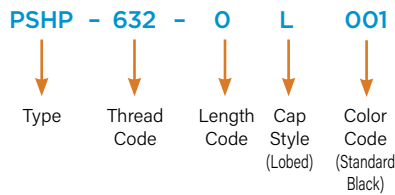


Part Number Designation For Retainer

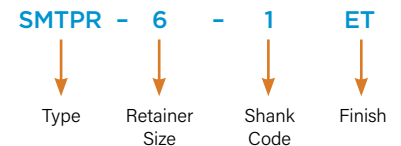


Color Capabilities For Type PSHP Screw


The colors shown here (codes #002 thru #007) are non-stocked standards and available on special order. Since actual cap colors may vary slightly from those shown here, we recommend that you request samples for color verification. If you require a custom color or you need a "color matched" cap, please contact us.

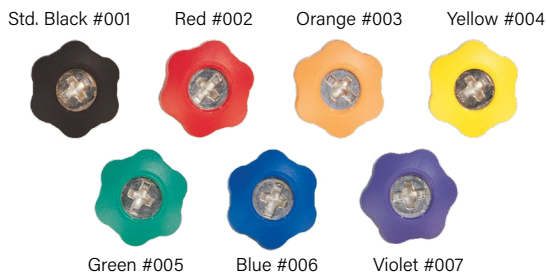

Available with Torx® recess on special order.



Four dimples on head designate metric thread.
Metal Phillips Recess
 #4-.40 & M3 = #1
 #6-.32 & M3.5 = #2

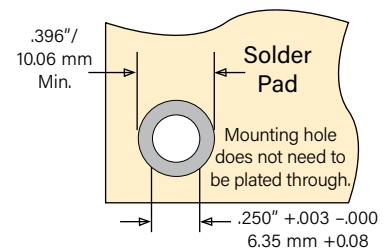


Stencil Masking Examples






Non-flammable UL 94-V0 plastic caps are available on special order.

PFK™ Broaching Captive Panel Screws



Shown here with self-clinching mating nut

Part Number Designation

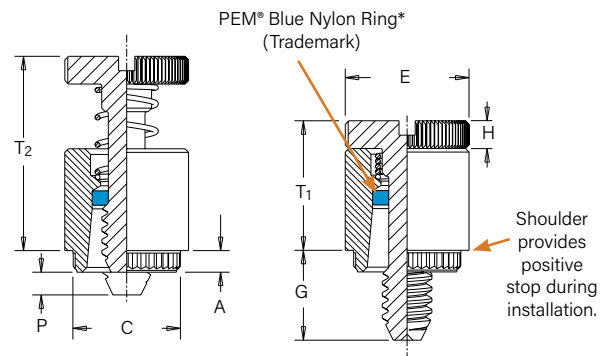

All dimensions are in inches.

| Unified | Thread Size | Type | Thread Code | Screw Length Code | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +.003 -.000 | C ±.003 | E ±.010 | G ±.016 | H ±.005 | P ±.025 | T ₁ Max. | T ₂ Nom. | Min. Dist. Hole C/L to Edge (1) |
|-----------------|-----------------|------|-------------|-------------------|----------------|----------------------|--------------------------------|---------|---------|---------|---------|---------|---------------------|---------------------|---------------------------------|
| | .112-40 (#4-40) | PFK | 440 | 40 | .060 | .060 | .265 | .283 | .312 | .250 | .072 | .000 | .36 | .54 | .20 |
| | | | | 62 | | | | | | .375 | | .125 | | | |
| 84 | | | | .500 | | | | | | .250 | | | | | |
| .138-32 (#6-32) | PFK | 632 | 40 | .060 | .060 | .281 | .299 | .344 | .250 | .072 | .000 | .36 | .54 | .26 | |
| | | | 62 | | | | | | .375 | | .125 | | | | |
| | | | 84 | | | | | | .500 | | .250 | | | | |


All dimensions are in millimeters.

| Metric | Thread Size x Pitch | Type | Thread Code | Screw Length Code | A (Shank) Max. | Min. Sheet Thickness | Hole Size In Sheet +0.08 | C ±0.08 | E ±0.25 | G ±0.4 | H ±0.13 | P ±0.64 | T ₁ Max. | T ₂ Nom. | Min. Dist. Hole C/L to Edge (1) |
|--------|---------------------|------|-------------|-------------------|----------------|----------------------|--------------------------|---------|---------|--------|---------|---------|---------------------|---------------------|---------------------------------|
| | M3 x 0.5 | PFK | M3 | 40 | 1.53 | 1.53 | 6.73 | 7.19 | 7.92 | 6.4 | 1.83 | 0 | 9.14 | 13.72 | 5.08 |
| | | | | 62 | | | | | | 9.5 | | 3.2 | | | |
| 84 | | | | 12.7 | | | | | | 6.4 | | | | | |

*Retaining rings are plastic with normal 250°F / 120°C temperature limit.

(1) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KFH™ Broaching Studs




Part Number Designation

KFH - 632 - 8 ET

↓ ↓ ↓ ↓

Type and Material Thread Code Length Code Finish

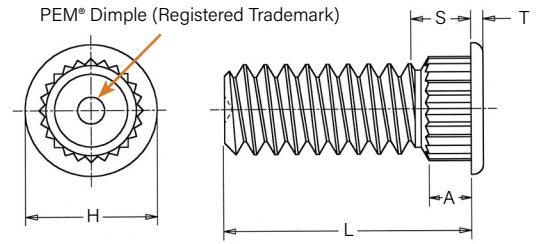

All dimensions are in inches.


| Unified | Thread Size | Type | Thread Code | Length "L" ±.010 (Length Code is in 16ths of an inch) | | | | | | A (Shank) Max. | Min. Sheet Thickness | Hole Size in Sheet +.003 -.000 | Max. Hole Size in Attached Parts | H ±.010 | S Max. (1) | T ±.005 | Min. Dist. Hole C/L to Edge (2) |
|---------|---------------------|------|-------------|--|------|------|------|------|------|----------------------|----------------------------|--|--|------------|------------------|------------|---|
| | | | | .250 | .312 | .375 | .500 | .625 | .750 | | | | | | | | |
| | .112-40 (#4-40) | KFH | 440 | 4 | 5 | 6 | 8 | 10 | 12 | .065 | .060 | .120 | .145 | .180 | .09 | .020 | .15 |
| | .138-32 (#6-32) | KFH | 632 | 4 | 5 | 6 | 8 | 10 | 12 | .065 | .060 | .140 | .170 | .200 | .09 | .020 | .19 |
| | .164-32 (#8-32) | KFH | 832 | 4 | 5 | 6 | 8 | 10 | 12 | .065 | .060 | .166 | .195 | .225 | .09 | .020 | .20 |
| | .190-32 (#10-32) | KFH | 032 | 4 | 5 | 6 | 8 | 10 | 12 | .065 | .060 | .189 | .220 | .250 | .09 | .020 | .20 |

All dimensions are in millimeters.


| Metric | Thread Size x Pitch | Type | Thread Code | Length "L" ±0.25 (Length Code is in millimeters) | | | | | | A (Shank) Max. | Min. Sheet Thickness | Hole Size in Sheet +0.08 | Max. Hole Size in Attached Parts | H ±0.25 | S Max. (1) | T ±0.13 | Min. Dist. Hole C/L to Edge (2) |
|--------|---------------------|------|-------------|---|---|----|----|----|----|----------------------|----------------------------|-----------------------------------|--|------------|------------------|------------|---|
| | | | | 6 | 8 | 10 | 12 | 15 | 18 | | | | | | | | |
| | M3 x 0.5 | KFH | M3 | 6 | 8 | 10 | 12 | 15 | 18 | 1.65 | 1.53 | 3 | 3.7 | 4.58 | 2.3 | 0.51 | 3.8 |
| | M4 x 0.7 | KFH | M4 | 6 | 8 | 10 | 12 | 15 | 18 | 1.65 | 1.53 | 4.2 | 4.8 | 5.74 | 2.3 | 0.51 | 5.1 |
| | M5 x 0.8 | KFH | M5 | 6 | 8 | 10 | 12 | 15 | 18 | 1.65 | 1.53 | 5 | 5.8 | 6.6 | 2.3 | 0.51 | 5.3 |

- (1) Threads are gaugeable to within 2 pitches of the "S" Max. dimension. A class 3B/5H maximum material commercial nut shall pass up to the "S" Max. dimension.
- (2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).


SMTRA™ ReelFast® Surface Mount Right Angle (R'angle®) Fasteners




Part Number Designation

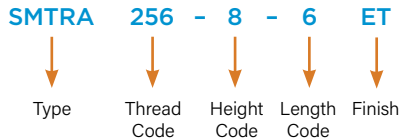

Patented.



Solder pad can be flush to edge.
Mounting holes do not need to be plated through.

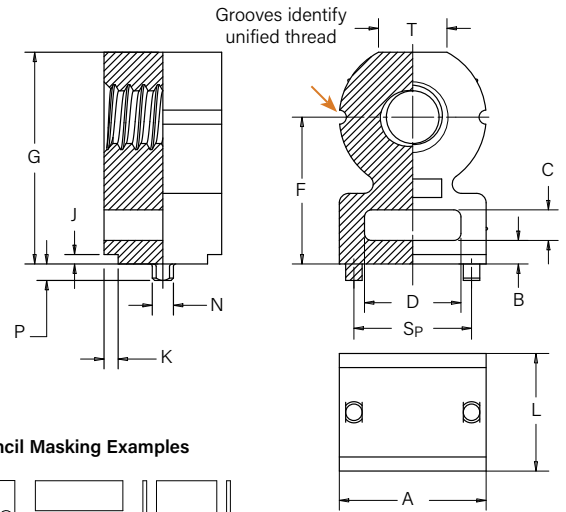

Stencil Masking Examples



All dimensions are in inches.

| Unified | Thread Size | Type | Thread Code | Height Code | Length Code | Length L ±.005 | Min. Sheet Thickness | Hole Size In Sheet +.003 -.000 | A ±.006 | B ±.006 | C ±.006 | D ±.006 | Height F ±.006 | G ±.006 | J Nom. | K Nom. | N Max. | P Max. | Sp ±.003 | T Nom. |
|---------|-----------------|-------|-------------|-------------|-------------|-------------------|----------------------|-----------------------------------|------------|------------|------------|------------|-------------------|------------|-----------|-----------|-----------|-----------|-------------|-----------|
| | .086-56 (#2-56) | SMTRA | 256 | 8 | 6 | .188 | .040 | .053 | .218 | .040 | .060 | .140 | .250 | .345 | .020 | .030 | .048 | .040 | .157 | .105 |
| | .112-40 (#4-40) | SMTRA | 440 | 9 | 6 | .188 | .040 | .053 | .250 | .050 | .065 | .160 | .281 | .390 | .020 | .030 | .048 | .040 | .188 | .125 |
| | .138-32 (#6-32) | SMTRA | 632 | 10 | 8 | .250 | .040 | .053 | .312 | .050 | .065 | .205 | .312 | .450 | .020 | .030 | .048 | .040 | .250 | .145 |
| | .164-32 (#8-32) | SMTRA | 832 | 12 | 9 | .281 | .040 | .053 | .375 | .050 | .075 | .250 | .375 | .535 | .020 | .030 | .048 | .040 | .312 | .195 |


All dimensions are in millimeters.

| Metric | Thread Size x Pitch | Type | Thread Code | Height Code | Length Code | Length L ±0.13 | Min. Sheet Thickness | Hole Size In Sheet +0.08 | A ±0.15 | B ±0.15 | C ±0.15 | D ±0.15 | Height F ±0.15 | G ±0.15 | J Nom. | K Nom. | N Max. | P Max. | Sp ±0.08 | T Nom. |
|--------|---------------------|-------|-------------|-------------|-------------|-------------------|----------------------|-----------------------------|------------|------------|------------|------------|-------------------|------------|-----------|-----------|-----------|-----------|-------------|-----------|
| | M2 x 0.4 | SMTRA | M2 | 6 | 5 | 5 | 1 | 1.35 | 5.5 | 1 | 1.5 | 3.5 | 6 | 8.4 | 0.5 | 0.75 | 1.22 | 1 | 4 | 2.65 |
| | M2.5 x 0.45 | SMTRA | M25 | 6 | 5 | 5 | 1 | 1.35 | 5.5 | 1 | 1.5 | 3.5 | 6 | 8.4 | 0.5 | 0.75 | 1.22 | 1 | 4 | 2.65 |
| | M3 x 0.5 | SMTRA | M3 | 7 | 5 | 5 | 1 | 1.35 | 6.35 | 1.25 | 1.65 | 4 | 7 | 9.75 | 0.5 | 0.75 | 1.22 | 1 | 4.75 | 3.2 |
| | M4 x 0.7 | SMTRA | M4 | 9 | 7 | 7 | 1 | 1.35 | 9.53 | 1.25 | 1.65 | 6.35 | 9 | 13.1 | 0.5 | 0.75 | 1.22 | 1 | 7.9 | 4.8 |


| Unified | Thread Code | Pad Width PA Min. | Pad Length PL Min. | Hole Spacing SH ±.002 | Hole Size In Sheet +.003 -.000 |
|---------|-------------|----------------------|-----------------------|--------------------------|-----------------------------------|
| | 256 | .262 | .171 | .157 | .053 |
| | 440 | .294 | .171 | .188 | .053 |
| | 632 | .356 | .233 | .250 | .053 |
| | 832 | .419 | .264 | .312 | .053 |

| Metric | Thread Code | Pad Width PA Min. | Pad Length PL Min. | Hole Spacing SH ±0.05 | Hole Size In Sheet +0.08 |
|--------|-------------|----------------------|-----------------------|--------------------------|-----------------------------|
| | M2 | 6.62 | 4.57 | 4 | 1.35 |
| | M25 | 6.62 | 4.57 | 4 | 1.35 |
| | M4 | 10.65 | 6.57 | 7.9 | 1.35 |

| Part Number | Parts Per Reel | Pitch (mm) | Tape Width (mm) |
|---------------|----------------|------------|-----------------|
| SMTRA256-8-6 | 375 | 16 | 24 |
| SMTRA440-9-6 | 300 | 16 | 24 |
| SMTRA632-10-8 | 200 | 20 | 32 |
| SMTRA832-12-9 | 200 | 20 | 32 |
| SMTRAM2-6-5 | 375 | 16 | 24 |
| SMTRAM25-6-5 | 375 | 16 | 24 |
| SMTRAM3-7-5 | 300 | 16 | 24 |
| SMTRAM4-9-7 | 200 | 20 | 32 |

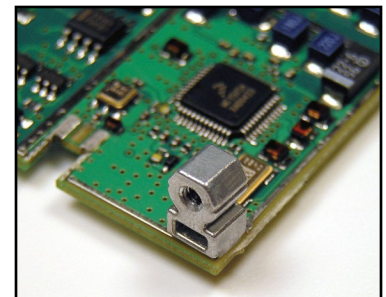

SFK™ SpotFast® Clinch/Broach Mount Fasteners

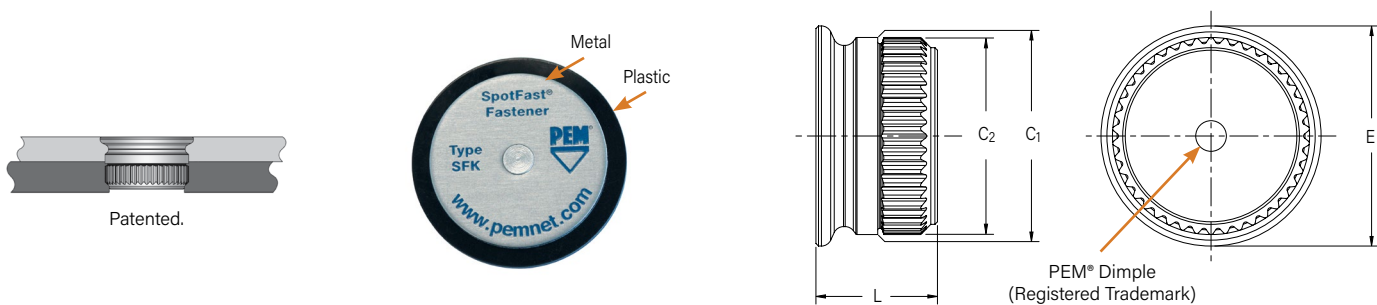


| Type and Size | Thickness Code | Panel 1 | | | | Panel 2 | | | | C ₁ Max. | | C ₂ ±0.08 mm / ±.003" | | E Max. | | L Max. | | Min. Dist. Hole C/L to Edge (2) | |
|---------------|----------------|-----------------------------|------|---|------|--------------------|------|---|------|---------------------|------|----------------------------------|------|--------|------|--------|------|---------------------------------|------|
| | | Thickness ±0.08 mm / ±.003" | | Mounting Hole +0.08 mm / +.003" - .000" | | Thickness Min. (1) | | Mounting Hole +0.08 mm / +.003" - .000" | | | | | | | | | | | |
| | | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | mm | in. | | |
| SFK-3 | 0.8 | 0.8 | .031 | 3 | .118 | 1.6 | .063 | 2.5 | .098 | 2.98 | .117 | 2.9 | .114 | 3.53 | .139 | 2.31 | .091 | 3 | 0.12 |
| SFK-3 | 1.0 | 1 | .039 | 3 | .118 | 1.6 | .063 | 2.5 | .098 | 2.98 | .117 | 2.9 | .114 | 3.76 | .148 | 2.51 | .099 | 3 | 0.12 |
| SFK-3 | 1.2 | 1.2 | .047 | 3 | .118 | 1.6 | .063 | 2.5 | .098 | 2.98 | .117 | 2.9 | .114 | 3.76 | .148 | 2.72 | .107 | 3 | 0.12 |
| SFK-3 | 1.6 | 1.6 | .063 | 3 | .118 | 1.6 | .063 | 2.5 | .098 | 2.98 | .117 | 2.9 | .114 | 3.76 | .148 | 3.12 | .123 | 3 | 0.12 |
| SFK-5 | 0.8 | 0.8 | .031 | 5 | .197 | 1.6 | .063 | 4.5 | .177 | 4.98 | .196 | 4.9 | .193 | 5.56 | .219 | 2.31 | .091 | 5.1 | 0.20 |
| SFK-5 | 1.0 | 1 | .039 | 5 | .197 | 1.6 | .063 | 4.5 | .177 | 4.98 | .196 | 4.9 | .193 | 5.56 | .219 | 2.51 | .099 | 5.1 | 0.20 |
| SFK-5 | 1.2 | 1.2 | .047 | 5 | .197 | 1.6 | .063 | 4.5 | .177 | 4.98 | .196 | 4.9 | .193 | 5.56 | .219 | 2.72 | .107 | 5.1 | 0.20 |
| SFK-5 | 1.6 | 1.6 | .063 | 5 | .197 | 1.6 | .063 | 4.5 | .177 | 4.98 | .196 | 4.9 | .193 | 5.56 | .219 | 3.12 | .123 | 5.1 | 0.20 |

- (1) Fastener will provide flush application at minimum sheet thickness.
- (2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).




Can be used as a single flush-mounted pivot point. For more information, please contact techsupport@pemnet.com



Type SFK joining metal to PCB/plastic.

Part Number Designation

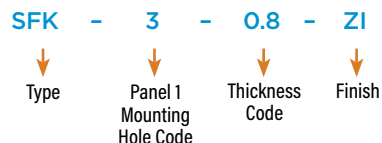

Material And Finish Specifications

| Type | Threads (1) | | Fastener Materials | | | | | Standard Finishes | | | Optional Finish | | For Use in Sheet Hardness: (3) | | | | |
|--------------------------------|--|--|------------------------|----------------------------|-------------------------|-------|----------------------------------|--|--|-----------|--|---------------|--------------------------------|-------------------------|-------------------------|------------------------|--|
| | Internal, ASME B1.1 2B/ ASME B1.13M 6H | External, ASME B1.1 2A/ ASME B1.13M 6g | Lead-Free Carbon Steel | 300 Series Stainless Steel | CDA-510 Phosphor Bronze | Brass | Nylon, Temp. Limit 200° F/ 93° C | Passivated and/or Tested Per ASTM A380 | Electro-Plated Tin ASTM B 545, Class B With Clear Preservative Coating, annealed (4) | No Finish | Electro-Plated Tin ASTM B 545, Class B With Clear Preservative Coating, annealed (4) | Black Nitride | HRB 70 / HB 125 or Less | HRB 65 / HB 116 or Less | HRB 60 / HB 107 or Less | HRB 55 / HB 96 or Less | Aluminum, Acrylic, Castings, Polycarbonate, and PC board |
| KF2 | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KFS2 | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KFE | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KFSE | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KFB3 | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KSSB | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| KFH | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| PFK Retainer | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| Screw | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| Spring | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| Retaining Ring | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | . | |
| Part Number Codes For Finishes | | | | | | | None | ET | X | ET | BN | | | | | | |

| Type | Threads (1) | | Fastener Materials | | | | | Standard Finishes (2) | | | For Use in Sheet Hardness: (3) | |
|--------------------------------|-------------------------|--|--|------------------------|-----------------------|----------------------------|-------|-----------------------|---|--|---------------------------------|-------------------------|
| | Miniature ISO 1501, 4H6 | Internal, ASME B1.1 2B/ ASME B1.13M 6H | External, ASME B1.1 2A/ ASME B1.13M 6g | Lead-Free Carbon Steel | Hardened Carbon Steel | 300 Series Stainless Steel | Brass | Zinc Diecast | Zinc Plated per ASTM B633, SC1 (5µm), Type III, Colorless | Electro-Plated Tin ASTM B 545, Class A With Clear Preservative Coating, annealed (4) | Bright Nickel Over Copper Flash | HRB 80 / HB 150 or less |
| SMTSO | S1 to S1.4 | 0-80 to 8-32/ M1.6 to M4 | . | . | . | . | . | . | . | . | . | . |
| SMTSOB | . | . | . | . | . | . | . | . | . | (6) | . | . |
| SMTBSO | . | . | . | . | . | . | . | . | . | . | . | . |
| SMTRA | . | . | . | . | . | . | . | . | . | . | . | . |
| SMPFLSM | . | . | . | . | . | . | . | . | . | . | . | . |
| Retainer | . | . | . | . | . | . | . | . | . | . | . | . |
| Screw | . | . | . | . | . | . | . | . | . | . | . | . |
| Spring | . | . | . | . | . | . | . | . | . | . | . | . |
| PSHP (5) | . | . | . | . | . | . | . | . | . | . | . | . |
| SMTPR | . | . | . | . | . | . | . | . | . | . | . | . |
| SFK | . | . | . | . | . | . | . | . | . | . | . | . |
| SMTSSS | . | . | . | . | . | . | . | . | . | . | . | . |
| SMTSK | . | . | . | . | . | . | . | . | . | . | . | . |
| Part Number Codes For Finishes | | | | | | | | ZI | ET | CN | | |

(1) For plated studs, Class 2A/6g, the maximum major and pitch diameter, after plating, may equal basic sizes and can be gauged to Class 3A/6h, per ASME B1.1 Section 7, Paragraph 2 and ASME B1.13M, Section 8, Paragraph 8.2.
 (2) See PEM Technical Support section of our web site for related plating standards and specifications.
 (3) HRB - Hardness Rockwell "B" Scale, HB - Hardness Brinell.
 (4) Optimal solderability life noted on packaging.
 (5) ABS cap on PSHP screw has a temperature limit of 200° F / 93° C.
 (6) The tin deposit on type SMTSOB meets the requirements of ASTM B545, Class A and although the copper and nickel barrier layers used under the tin do not strictly comply with ASTM B545 thickness requirements they have proven effective at preventing zinc migration and providing the specified solderable shelf life.

Installation

KF2™/KFS2™/KFE™/KFSE™/PFK™ Fasteners


1. Prepare properly sized mounting hole in board.
2. Place fastener into the anvil hole and place the mounting hole over the shank of the fastener as shown in drawing.
3. With installation punch and anvil surfaces parallel, apply squeezing force until shoulder contacts the board.

PEMSERTER® Installation Tooling (1)

| Type | Thread Code | Anvil Part Number | Punch Part Number |
|----------|--------------------|-------------------|-------------------|
| KFE/KFSE | 440/116 -4 to -8 | 975200846300 | 975200048 |
| KFE/KFSE | 440/116 -10 to -12 | 975200847300 | |
| KFE/KFSE | 440/116 -16 to -20 | 975200848300 | |
| KFE/KFSE | 440/116 -20 to -24 | 975200882300 | |
| KFE/KFSE | M3 -3 to -6 | 975200846300 | |
| KFE/KFSE | M3 -8 to -10 | 975200847300 | |
| KFE/KFSE | M3 -12 to -14 | 975201222300 | |
| KFE/KFSE | M3 -14 to -16 | 975200848300 | |
| KFE/KFSE | 632/143 -4 to -8 | 975200849300 | |
| KFE/KFSE | 632/143 -10 to -12 | 975200850300 | |
| KFE/KFSE | 632/143 -16 to -20 | 975200851300 | |
| KFE/KFSE | 632/143 -22 to -24 | 975200883300 | |
| KFE/KFSE | 632/143 -28 to -32 | 975200884300 | |
| KFE/KFSE | 3.6 -3 to -6 | 975200849300 | 975200048 |
| KFE/KFSE | 3.6 -8 to -10 | 975200850300 | |
| KFE/KFSE | 3.6 -12 to -16 | 975200851300 | |
| KFE/KFSE | 4.2 -2 | 975201216300 | |
| KFE/KFSE | 4.2 -3 to -6 | 975201217300 | |
| KFE/KFSE | 4.2 -8 to -10 | 975201218300 | |
| KFE/KFSE | 4.2 -12 to -14 | 975201220300 | |
| KFE/KFSE | 4.2 -14 to -16 | 975201219300 | |


PEMSERTER® Installation Tooling (1)

| Type | Thread Code | Anvil Part Number | Punch Part Number |
|------|-------------|-------------------|-------------------|
| PFK | 440/M3 | 975200026 | 975200060 |
| PFK | 632 | 975200027 | 975200061 |

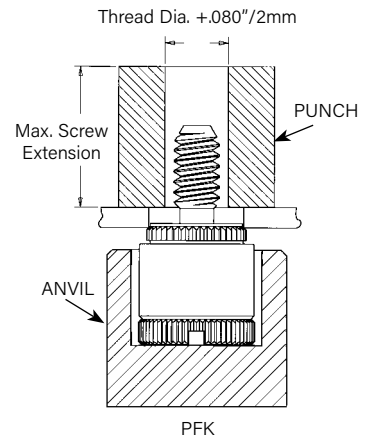

PEMSERTER® Installation Tooling (1)


| Type | Thread Code | Anvil Part Number | Punch Part Number |
|----------|--------------------|-------------------|-------------------|
| KF2/KFS2 | 080 | 8015899 | 975200048 |
| KF2/KFS2 | 256/440/M2/M2.5/M3 | 975200904300 | |
| KF2/KFS2 | 632/M3.5 | 975200035 | |
| KF2/KFS2 | 832/M4 | 975200037 | |
| KF2/KFS2 | 032/M5 | 975200905300 | |



(1) [Click here](#) for a quote on Haeger® custom installation tooling.

KSSB™/KFH™ Fasteners


1. Prepare properly sized mounting hole in board.
2. Place fastener into mounting hole as shown.
3. With installation punch and anvil surfaces parallel, apply squeezing force until head contacts the board.

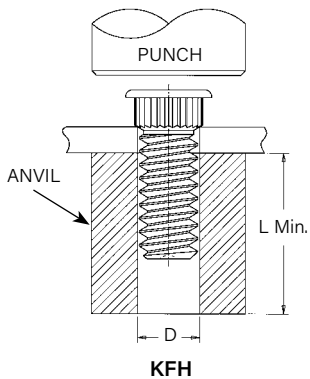

PEMSERTER® Installation Tooling (1)

| Part Number | D +.003\" - .000\" | Punch Part No. | Anvil Part No.* |
|-------------|-----------------------|----------------|-----------------|
| KFH-440-L | .113\" | 975200048 | 970200006300 |
| KFH-632-L | .140\" | | 970200007300 |
| KFH-832-L | .166\" | | 970200008300 |
| KFH-032-L | .191\" | | 970200009300 |

| Part Number | D +0.08mm | Punch Part No. | Anvil Part No.* |
|-------------|--------------|----------------|-----------------|
| KFH-M3-L | 3.1mm | 975200048 | 970200229300 |
| KFH-M4-L | 4.1mm | | 970200019300 |
| KFH-M5-L | 5.1mm | | 970200008300 |

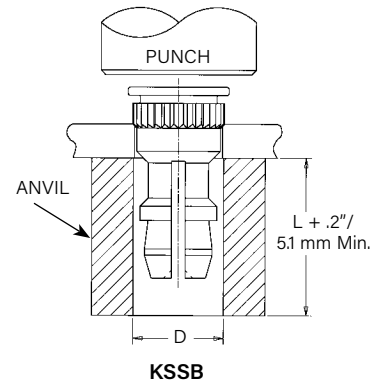

PEMSERTER® Installation Tooling (1)

| Part Number | D +.003\" - .000\"/ +0.08mm | Punch Part No. | Anvil for material .050\" / 1.27mm to .065\" / 1.65mm | Anvil for material greater than .065\" / 1.65mm |
|-------------|-----------------------------------|----------------|---|---|
| KSSB-156-L | .216\" | 975200048 | 8022167 | 970200015300 |
| KSSB-4mm-L | 5.49mm | | | |

(1) [Click here](#) for a quote on Haeger® custom installation tooling.


KFB3™ Fasteners

1. Prepare properly sized mounting hole in board.
2. Place fastener into the anvil hole and place the mounting hole over the shank of the fastener as shown in diagram.
3. Using a punch flaring tool and a recessed anvil, apply squeezing force until the shoulder of the fastener contacts the board. As the fastener seats itself in the proper position, the punch tool will flare the extended portion of the shank outward to complete the installation. The combination of broaching and flaring provides high pushout performance.

PEMSERTER® Installation Tooling ⁽¹⁾

| Thread Size | Length Code | Anvil | Punch (Flaring Tool) |
|-------------|-------------|--------------|----------------------|
| #4-40 | -2 | 975201213300 | 975201231400 |
| #4-40 | -4 to -8 | 975200846300 | |
| #4-40 | -10 to -12 | 975200847300 | |
| #4-40 | -16 to -20 | 975200848300 | |
| #4-40 | -20 to -24 | 975200882300 | |
| #6-32 | -2 | 975201215300 | 975201232400 |
| #6-32 | -4 to -8 | 975200849300 | |
| #6-32 | -10 to -12 | 975200850300 | |
| #6-32 | -16 to -20 | 975200851300 | |
| #6-32 | -22 to -24 | 975200883300 | |
| #6-32 | -28 to -32 | 975200884300 | |
| #10-32 | -2 | 8026682 | 8026680 |
| #10-32 | -4 to -8 | 8026683 | |
| #10-32 | -10 to -12 | 8026684 | |
| #10-32 | -16 to -20 | 8026685 | |
| #10-32 | -20 to -24 | 8026686 | |
| #10-32 | -28 to -32 | 8026687 | |
| 1/4-20 | -2 | 8026688 | 8026681 |
| 1/4-20 | -4 to -8 | 8026689 | |
| 1/4-20 | -10 to -12 | 8026690 | |
| 1/4-20 | -16 to -20 | 8026691 | |
| 1/4-20 | -20 to -24 | 8026692 | |
| 1/4-20 | -28 to -32 | 8026693 | |

| Thread Size | Length Code | Anvil | Punch (Flaring Tool) |
|-------------|-------------|--------------|----------------------|
| M3 | -2 | 975201213300 | 975201231400 |
| M3 | -3 to -6 | 975200846300 | |
| M3 | -8 to -10 | 975200847300 | |
| M3 | -12 to -14 | 975201222300 | |
| M3 | -14 to -16 | 975200848300 | |
| M4 | -2 | 975201216300 | 975201221400 |
| M4 | -3 to -6 | 975201217300 | |
| M4 | -8 to -10 | 975201218300 | |
| M4 | -12 to -14 | 975201220300 | |
| M4 | -14 to -16 | 975201219300 | |
| M5 | -2 | 8026670 | 8026680 |
| M5 | -3 to -6 | 8026671 | |
| M5 | -8 to -10 | 8026672 | |
| M5 | -12 to -14 | 8026673 | |
| M5 | -14 to -16 | 8026674 | |
| M6 | -2 | 8026675 | 8026681 |
| M6 | -3 to -6 | 8026676 | |
| M6 | -8 to -10 | 8026677 | |
| M6 | -12 to -14 | 8026678 | |
| M6 | -14 to -16 | 8026679 | |

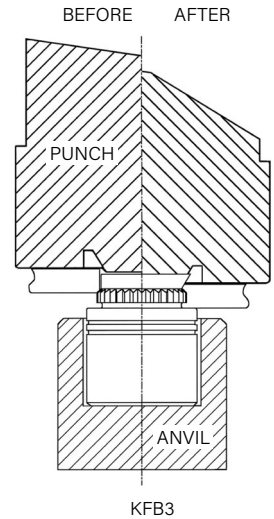

(1) PennEngineering manufactures and stocks the installation tooling for KFB3 fasteners.

[Click here](#) for a quote on Haeger® custom installation tooling.



SFK™ Fasteners

- Step 1. Prepare properly sized mounting hole in both panels.
- Step 2. Using only Panel 1, with the punch and anvil surfaces parallel, apply squeezing force until the fastener is flush with the top of Panel 1.
- Step 3. Place Panel 2 over fastener and apply squeezing force.

PEMSERTER® Installation Tooling ⁽¹⁾

| Size | C ±0.13/±.003 (mm) / (in.) | Punch Part No. | Anvil Part No.* |
|-------|----------------------------------|-------------------|--------------------|
| SFK-3 | 3.05 / .120 | 975200048 | 970200229300 |
| SFK-5 | 5.05 / .199 | 975200048 | 970200020300 |

* Part number for anvil used in Step 2

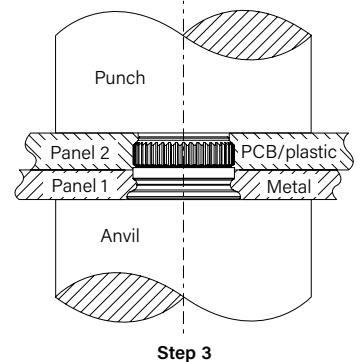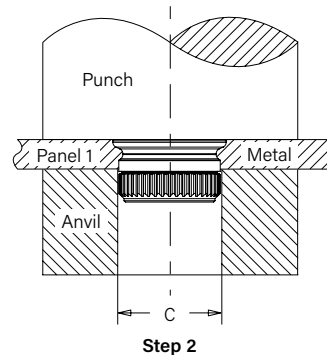

NOTE: Fastener can be installed in both sheets at once when metal panel is adequately soft compared to the non-metal panel. E-mail techsupport@pemnet.com for more information.


(1) [Click here](#) for a quote on Haeger® custom installation tooling.

Installation Notes


- For best results we recommend using a HAEGER® or PEMSERTER® press for installation of PEM self-clinching fasteners. Please check our website for more information.
- Visit the Animation Library on our website to view the installation process [for select products](#).

Installation


SMTSO™ Nuts And Standoffs

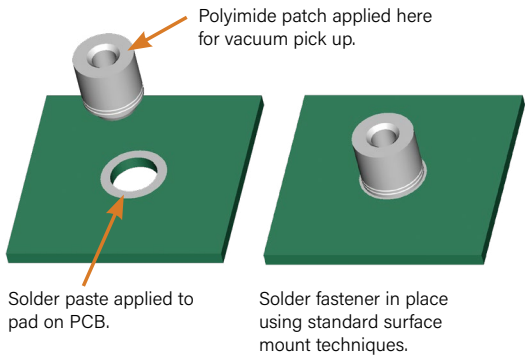


Smtra™ R'angle® Fasteners

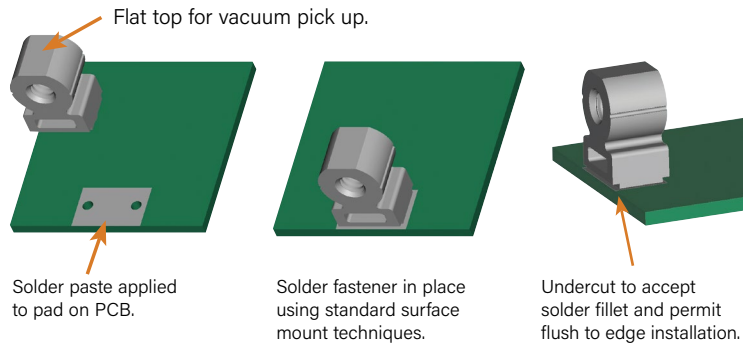


SMTPF™ Captive Panel Screws

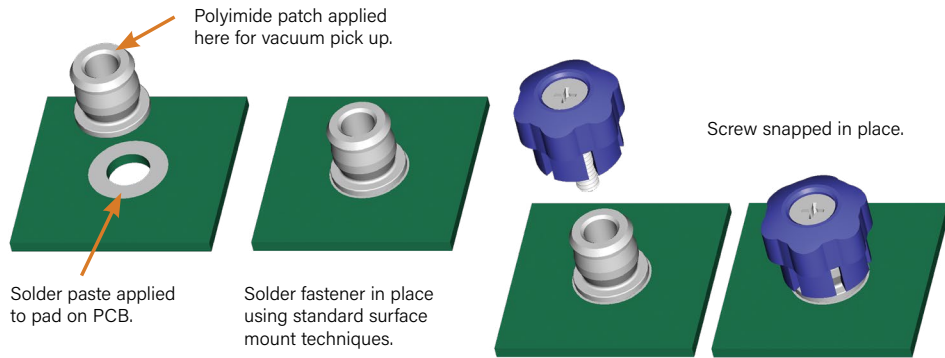


SMTBSO™ Fasteners

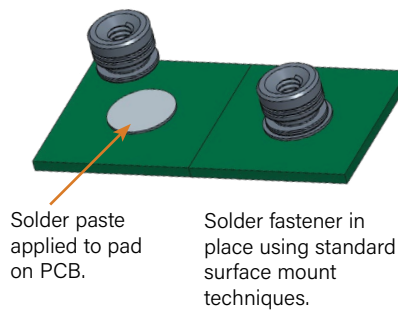


SMTPF LSM™ Captive Panel Screws

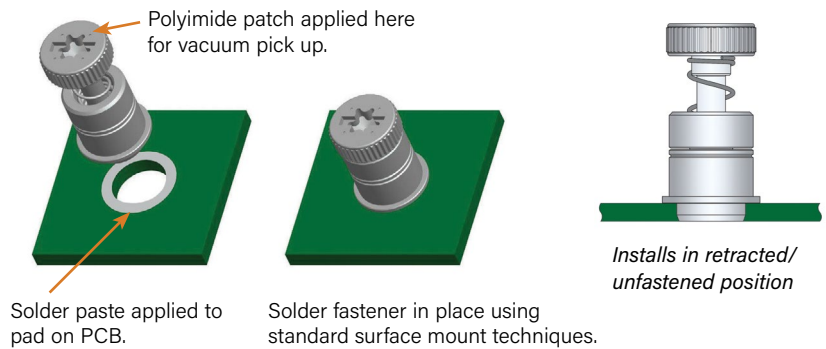

SMTSS™ Standoffs

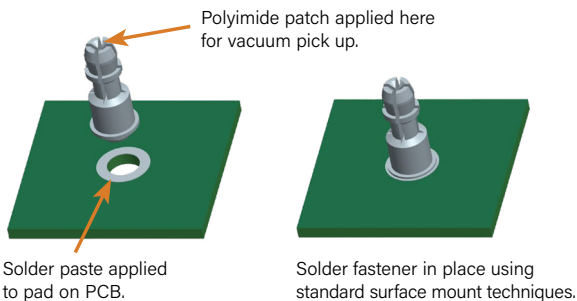

SMTSK™ Standoffs

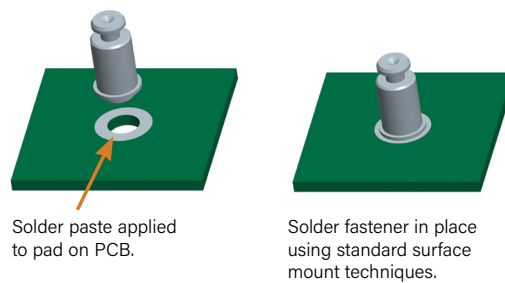


For Additional HAEGER® and PEMSERTER® Tooling Information / Part Numbers




HAEGER® MANUAL TOOLING CATALOG

HAEGER® AUTO TOOLING CATALOG

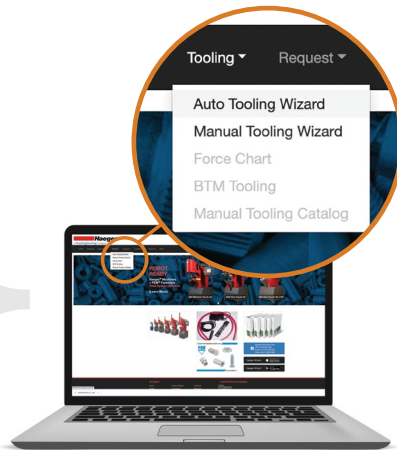

Go to haeger.com to access the Auto and Manual Tooling Wizards



Or download the HAEGER WIZZARD Phone App

Tooling Wizard

BTM Tooling



PEMSERTER® MANUAL TOOLING CATALOG

PEMSERTER® AUTO TOOLING CATALOG

Performance Data⁽¹⁾

KF2™/KFS2™/KFE™/KFSE™/KFB3™/KFH™/PFK™ Broaching And Broach/Flare Mount Fasteners

| Unified | Type | Thread Code | Max. Nut Tightening Torque (in. lbs.) | Test Sheet Thickness & Test Sheet Material | Installation (lbs.) | Pushout ⁽²⁾ (lbs.) | Torque-out (in. lbs.) | Rated Current Amps ⁽⁵⁾ | |
|---------|------------------------|-------------|---------------------------------------|--|---------------------|-------------------------------|-----------------------|-----------------------------------|-----|
| | KF2, KFS2 KFE, KFSE | | 256 | (3) | .060" FR-4 Panel | 400 | 60 | 6 | – |
| | | | 440 | (3) | .060" FR-4 Panel | 400 | 65 | 15 | – |
| | | | 632 | (3) | .060" FR-4 Panel | 500 | 80 | 30 | – |
| | | | 832 | (3) | .060" FR-4 Panel | 700 | 95 | 35 | – |
| | | | 032 | (3) | .060" FR-4 Panel | 700 | 100 | 40 | – |
| | KFB3 | | 440 | (3) | .060" FR-4 Panel | 1000 | 140 | 18 | 42 |
| | | | 632 | (3) | .060" FR-4 Panel | 1500 | 170 | 28 | 88 |
| | | | 032 | (3) | .060" FR-4 Panel | 1600 | 180 | 30 | 100 |
| | | | 0420 | (3) | .060" FR-4 Panel | 1700 | 188 | 42 | 150 |
| KFH | | 440 | 4 | .060" FR-4 Panel | 400 | 65 | 7 | 14 | |
| | | 632 | 8 | .060" FR-4 Panel | 400 | 70 | 11 | 19 | |
| | | 832 | 15 | .060" FR-4 Panel | 400 | 80 | 16 | 24 | |
| | | 032 | 18 | .060" FR-4 Panel | 400 | 90 | 17 | 30 | |
| PFK | | 440 | (3) | .060" FR-4 Panel | 250 | 55 | (3) | – | |
| | | 632 | (3) | .060" FR-4 Panel | 400 | 60 | (3) | – | |

| Metric | Type | Thread Code | Max. Nut Tightening Torque (N-m) | Test Sheet Thickness & Test Sheet Material | Installation (kN) | Pushout ⁽²⁾ (N) | Torque-out (N-m) | Rated Current Amps ⁽⁵⁾ | |
|--------|------------------------|-------------|----------------------------------|--|-------------------|----------------------------|------------------|-----------------------------------|-----|
| | KF2, KFS2 KFE, KFSE | | M2 | (3) | 1.5 mm FR-4 Panel | 2.2 | 267 | 0.68 | – |
| | | | M3 | (3) | 1.5 mm FR-4 Panel | 2.2 | 290 | 1.7 | – |
| | | | M4 | (3) | 1.5 mm FR-4 Panel | 2.2 | 420 | 3.4 | – |
| | | | M5 | (3) | 1.5 mm FR-4 Panel | 2.9 | 440 | 4.5 | – |
| | KFB3 | | M3 | (3) | 1.5 mm FR-4 Panel | 4.4 | 560 | 2.03 | 42 |
| | | | M4 | (3) | 1.5 mm FR-4 Panel | 6 | 680 | 3.2 | 88 |
| | | | M5 | (3) | 1.5 mm FR-4 Panel | 7.1 | 800 | 3.5 | 100 |
| | | | M6 | (3) | 1.5 mm FR-4 Panel | 7.6 | 835 | 4.8 | 150 |
| | KFH | | M3 | 0.45 | 1.5 mm FR-4 Panel | 1.8 | 285 | 0.79 | 15 |
| | | M4 | 1.6 | 1.5 mm FR-4 Panel | 1.8 | 355 | 1.8 | 23 | |
| | | M5 | 2.1 | 1.5 mm FR-4 Panel | 1.8 | 400 | 1.92 | 32 | |
| PFK | | M3 | (3) | 1.5 mm FR-4 Panel | 1.1 | 245 | (3) | – | |

KSSB™ Broaching Snap-Top® Standoffs

| Unified | Type | Panel 1 (.060" FR-4 Fiberglass) ⁽⁴⁾ | | Panel 2 (Removable) ⁽⁴⁾ | | |
|---------|------|--|----------------|------------------------------------|-----------------------------|----------------------------|
| | | Installation (lbs.) | Pushout (lbs.) | Max. First On Force (lbs.) | Min. First Off Force (lbs.) | Min. 15th Off Force (lbs.) |
| | KSSB | 500 | 110 | 13 | 3.0 | 1.0 |

| Metric | Type | Panel 1 (1.5 mm FR-4 Fiberglass) ⁽⁴⁾ | | Panel 2 (Removable) ⁽⁴⁾ | | |
|--------|------|---|-------------|------------------------------------|--------------------------|-------------------------|
| | | Installation (kN) | Pushout (N) | Max. First On Force (N) | Min. First Off Force (N) | Min. 15th Off Force (N) |
| | KSSB | 2.2 | 484 | 57.7 | 13.3 | 4.4 |

- (1) Published installation forces are for general reference. Actual set-up and confirmation of complete installation should be made by observing proper seating of fastener as described in the installation steps. Other performance values reported are averages when all proper installation parameters and procedures are followed. Variations in mounting hole size, sheet material, and installation procedure may affect performance. Performance testing this product in your application is recommended. We will be happy to provide technical assistance and/or samples for this purpose.
- (2) These are typical values for parts installed in drilled mounting holes. Punched mounting holes yield values approximately 15% less.
- (3) Not applicable.
- (4) See Application Data drawing on page 10.
- (5) The maximum carrying current for each of the above fasteners is calculated based on a heat transfer coefficient of 20 W/m² °K and a maximum temperature rise of 15°C / 27°F above ambient.

SFK™ SpotFast® Clinch/Broach Mount Fasteners

| Type and Size | Thick-ness Code | Installation into Panel 1 | | Installation into Panel 2 | | Pushout of Panel 2 (3) | |
|---------------|-----------------|---------------------------|------|---------------------------|------|------------------------|----|
| | | Cold-rolled Steel | | FR-4 Fiberglass | | N lbs. | |
| | | kN | lbs. | kN | lbs. | | |
| SFK-3 | 0.8 | 6.2 | 1400 | 1.8 | 400 | 200 | 45 |
| SFK-3 | 1.0 | 8 | 1800 | 1.8 | 400 | 200 | 45 |
| SFK-3 | 1.2 | 8.9 | 2000 | 1.8 | 400 | 200 | 45 |
| SFK-3 | 1.6 | 10.2 | 2300 | 1.8 | 400 | 200 | 45 |
| SFK-5 | 0.8 | 11.1 | 2500 | 1.8 | 400 | 400 | 90 |
| SFK-5 | 1.0 | 13.5 | 3000 | 1.8 | 400 | 400 | 90 |
| SFK-5 | 1.2 | 15.6 | 3500 | 1.8 | 400 | 400 | 90 |
| SFK-5 | 1.6 | 17.8 | 4000 | 1.8 | 400 | 400 | 90 |

SMTSS™ ReelFast® SNAP-TOP® Standoffs(1)(2)

| Type, Material and Size | Panel 1 (Bottom) | | Panel 2 (Top) |
|-------------------------|---------------------------|-------------------------|--------------------|
| | Test Sheet Material | Pushout | Max. Snap-on Force |
| | SMTSS-156 | .062" Single Layer FR-4 | 113 lbs. |
| SMTSS-4MM | 1.58 mm Single Layer FR-4 | 500 N | 89 N |

SMTSK™ Keyhole® Standoffs(1)(2)

| Type and Size | Panel 1 (Bottom) | |
|---------------|---------------------------|-------------------------|
| | Test Sheet Material | Pushout |
| | SMTSK-6060 | .062" Single Layer FR-4 |
| SMTSK-61.5 | 1.58 mm Single Layer FR-4 | 500 N |

SMTSO™/SMTSOB™ Fasteners(1)(2)

| Type | Thread/Thru-hole Code | Test Sheet Material - .062" Single Layer FR-4 | | | | Rated Current Amps (6) |
|--------|-----------------------|---|-------------|-----------------------|------------------|------------------------|
| | | Pushout (lbs.) | Pushout (N) | Torque-out (in. lbs.) | Torque-out (N-m) | |
| SMTSO | 080 | 85.1 | 378.7 | 4.94 | 0.56 | 11 |
| SMTSOB | | | | | | — |
| SMTSO | 256 | 56.5 | 251 | 8.56 | 1 | 25 |
| SMTSOB | | | | | | 40 |
| SMTSO | 440 | 56.5 | 251 | 8.56 | 1 | 22 |
| SMTSOB | | | | | | 36 |
| SMTSO | 632 | 93.5 | 416 | 13.83 | 1.6 | 34 |
| SMTSOB | | | | | | 55 |
| SMTSO | 832 | 151.1 | 672 | 26.96 | 3 | 47 |
| SMTSOB | | | | | | 76 |
| SMTSO | 116 | — | — | — | — | 22 |
| SMTSOB | | 37 | | | | |
| SMTSO | 143 | — | — | — | — | 33 |
| SMTSOB | | 55 | | | | |
| SMTSO | M1 | 85.1 | 378.7 | 4.94 | 0.56 | 11 |
| SMTSOB | | | | | | — |
| SMTSO | M1.2 | 85.1 | 378.7 | 4.94 | 0.56 | 10 |
| SMTSOB | | | | | | — |
| SMTSO | M1.4 | 85.1 | 378.7 | 4.94 | 0.56 | 10 |
| SMTSOB | | | | | | — |
| SMTSO | M1.6 | 85.1 | 378.7 | 4.94 | 0.56 | 10 |
| SMTSOB | | | | | | — |
| SMTSO | M3 | 56.5 | 251 | 8.56 | 1 | 22 |
| SMTSOB | | | | | | 36 |
| SMTSO | M3.5 | 93.5 | 416 | 13.83 | 1.6 | 34 |
| SMTSOB | | | | | | 55 |
| SMTSO | M4 | 151.1 | 672 | 26.96 | 3 | 47 |
| SMTSOB | | | | | | 76 |
| SMTSO | 3.1 | — | — | — | — | 22 |
| SMTSOB | | 36 | | | | |
| SMTSO | 3.6 | — | — | — | — | 33 |
| SMTSOB | | 55 | | | | |
| SMTSO | 4.2 | — | — | — | — | 46 |
| SMTSOB | | 75 | | | | |

SMTRA™ R'ANGLE® Fasteners(1)(2)

| Unified | Part Number | Test Sheet Material - .062" Single Layer FR-4 | |
|---------|---------------|---|------------------|
| | | Pushout (lbs.) | Side Load (lbs.) |
| | | SMTRA256-8-6 | 51.7 |
| | SMTRA440-9-6 | 89.5 | 10.8 |
| | SMTRA632-10-8 | 110.3 | 8.4 |
| | SMTRA832-12-9 | 137.2 | 21.2 |

| Metric | Part Number | Test Sheet Material - 1.58 mm Single Layer FR-4 | |
|--------|--------------|---|---------------|
| | | Pushout (N) | Side Load (N) |
| | | SMTRAM2-6-5 | 418.2 |
| | SMTRAM25-6-5 | 216.5 | 36.9 |
| | SMTRAM3-7-5 | 257.6 | 41.3 |
| | SMTRAM4-9-7 | 369.3 | 73.3 |

SMTBSO™ Fasteners(1)

| Part Number | Test Sheet Material - .062"/1.58mm Single Layer FR-4 | | | | Rated Current Amps (6) |
|--------------|--|--------------|-------------------|------------------|------------------------|
| | Pull Off (lbs.) | Pull Off (N) | Torque-out (lbs.) | Torque-out (N-m) | |
| SMTBSO-440-6 | 61 | — | 15.4 | — | 12 |
| SMTBSO-M3-4 | — | 270 | — | 1.75 | 22 |

Testing Conditions For Surface Mounted Fasteners

| | | | |
|-----------------------|-------------------------------------|----------------|---|
| Oven | Quad ZCR convection oven w/ 4 zones | Spokes | 2 Spoke Pattern |
| High Temp | 473°F / 245°C | Paste | Amtech NC559LF Sn96.5/3.0Ag/0.5Cu (SAC305) (SMTSO, SMTRA, SMTPR) |
| Board Finish | 62% Sn, 38% Pb | | Alpha CVP-390 Sn96.5/3.0Ag/0.5Cu (SAC305) (SMTPLSM, SMTSS, SMTSK, SMTBSO) |
| Screen Printer | Ragin Manual Printer | Stencil | .0067" / 0.17 mm thick (SMTSO, SMTRA, SMTPR, SMTSS, SMTSK, SMTBSO) |
| Vias | None | | .005" / 0.13 mm thick (SMTPLSM) |

- (1) With lead-free paste. Average values of 30 test points. The data presented here is for general comparison purposes only. Actual performance is dependent upon application variables. We will be happy to provide samples for you to install. If required, we can also test your installed hardware and provide you with the performance data specific to your application.
- (2) Further testing details can be found in our website's literature section.
- (3) In most applications, pullout strength of the SFK fastener in Panel 1 exceeds pushout strength of Panel 2.
- (4) Torque values shown will produce a preload of 70% minimum tensile with a nut factor "k" equal to .1.
- (5) Failure occurred at the solder joint. Screw retention strength is greater than the retainer.
- (6) The maximum carrying current for each of the above fasteners is calculated based on a heat transfer coefficient of 20 W/m² °K and a maximum temperature rise of 15°C / 27°F above ambient.

SMTPFSLM™ Fasteners⁽¹⁾

| Unified | Type and Thread Size | Min. Tensile Strength (lbs.) | Rec. Tightening Torque (in. lbs.) (4) | Test Sheet Material | |
|---------|----------------------|------------------------------|---------------------------------------|---------------------|---------------------|
| | | | | .060" P.C. Board | |
| | | | | Pushout (lbs.) (5) | Pull-off (lbs.) (5) |
| | SMTPFSLM-440 | 556 | 4.4 | 100 | |
| | SMTPFSLM-632 | 724 | 7.0 | 105 | |

| Metric | Type and Thread Size | Min. Tensile Strength (N) | Rec. Tightening Torque (N-m) (4) | Test Sheet Material | |
|--------|----------------------|---------------------------|----------------------------------|---------------------|------------------|
| | | | | 1.5 mm P.C. Board | |
| | | | | Pushout (N) (5) | Pull-off (N) (5) |
| | SMTPFSLM-M3 | 2900 | 0.61 | 445 | |
| | SMTPFSLM-M3.5 | 3269 | 0.8 | 465 | |

SMTPR™ Retainers⁽¹⁾


| Part Number | Test Sheet Material - .062" Single Layer FR-4 | |
|-------------|---|-------------|
| | Pushout (lbs.) | Pushout (N) |
| SMTPR-6-IET | 161.4 | 718 |

Testing Conditions For Surface Mounted Fasteners

- Oven** Quad ZCR convection oven w/ 4 zones
- High Temp** 473°F / 245°C
- Board Finish** 62% Sn, 38% Pb
- Screen Printer** Ragin Manual Printer
- Vias** None
- Spokes** 2 Spoke Pattern
- Paste** Amtech NC559LF Sn96.5/3.0Ag/0.5Cu (SAC305) (SMTSO, SMTRA, SMTPR)
Alpha CVP-390 Sn96.5/3.0Ag/0.5Cu (SAC305) (SMTPFSLM, SMTSS, SMTSK)
- Stencil** .0067" / 0.17 mm thick (SMTSO, SMTRA, SMTPR, SMTSS, SMTSK)
.005" / 0.13 mm thick (SMTPFSLM)

- (1) With lead-free paste. Average values of 30 test points. The data presented here is for general comparison purposes only. Actual performance is dependent upon application variables. We will be happy to provide samples for you to install. If required, we can also test your installed hardware and provide you with the performance data specific to your application.
- (2) Torque values shown will produce a preload of 70% minimum tensile with a nut factor "k" equal to 1.
- (3) Failure occurred at the solder joint. Screw retention strength is greater than the retainer.

SMTSO™ Reflow Curve

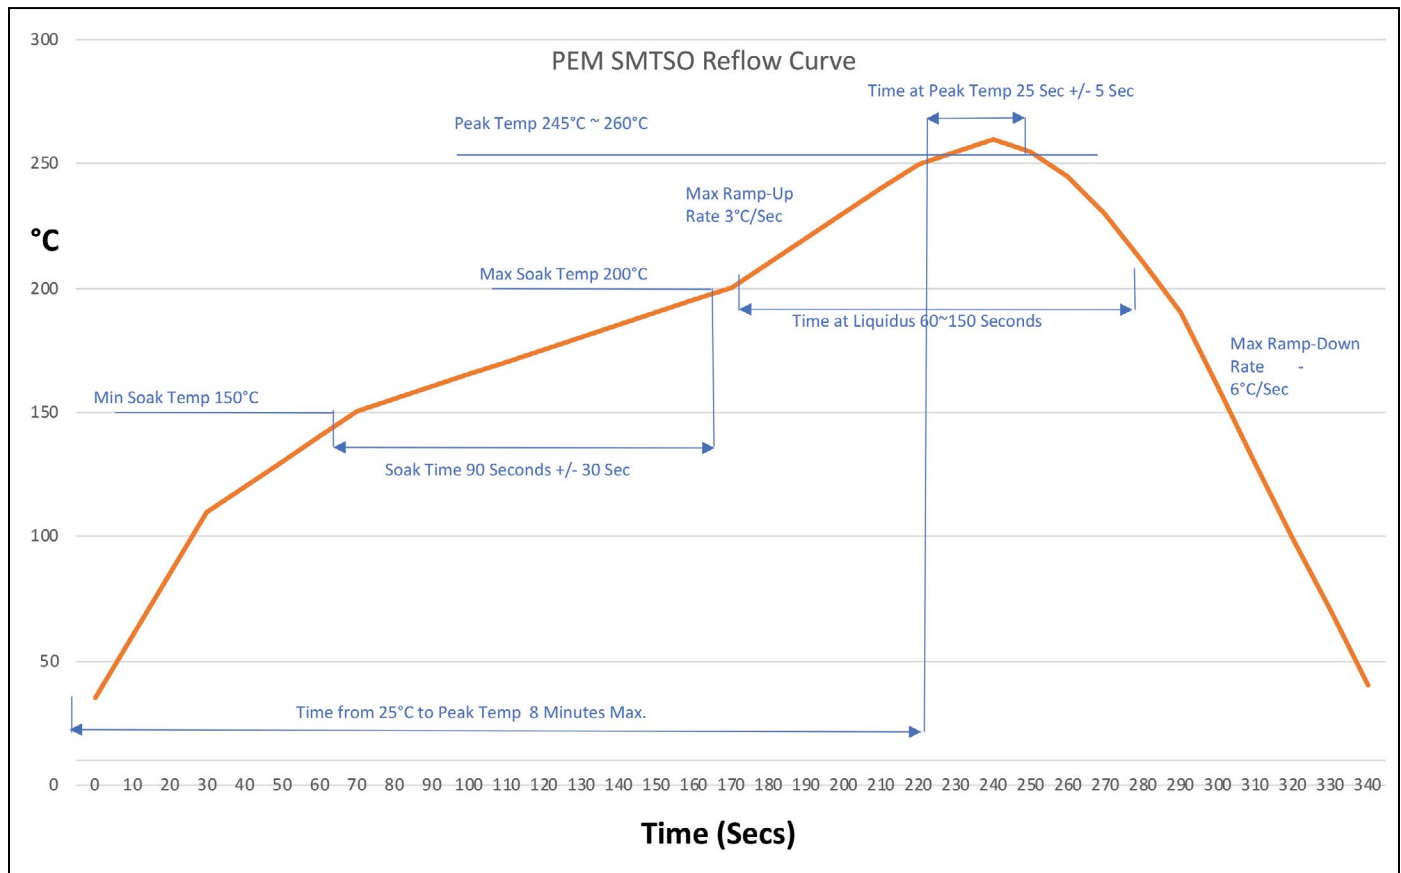

Other Fasteners For Consideration To Use With PC Boards

PF11MW™ Floating Captive Panel Screws

(See PEM® Bulletin PF)

Unique flare mount feature allow fasteners to “float” in mounting hole.

- Compensates for mating thread misalignment.
- Installs into any panel material.
- Appropriate for close center-line-to-edge applications.
- Color coded knobs available.



Can install into PC Board, plastic or metal

PF11MF™ Flare-Mounted Captive Panel Screws

(See PEM® Bulletin PF)

- Appropriate for close centerline-to-edge applications.
- Doesn't require high installation force.
- Installs into any panel material.
- Installs flush on back side of panel.
- Color coded knobs available.




Can install into PC Board, plastic or metal

SGPC™ Swaging Collar Studs

(See PEM® Bulletin FH)

- Can be installed into most materials, including stainless steel and rigid non-metallic panels.
- Can be used to attach dissimilar materials.
- Can accommodate multiple panels as long as the total thickness does not exceed the maximum sheet thickness.
- Appropriate for close center-line-to-edge applications.



Can install into PC Board, plastic or metal

SOAG™/SOSG™ Grounding Standoffs

(See PEM® Bulletin SO)

- Designed for clinching into steel or aluminum chassis.
- “Gripping teeth” on opposite side of standoff makes firm electrical contact with mating PC Board.



PC Board plastic or metal
Metal

SKC™ Keyhole® Standoffs

(See PEM® Bulletin SK)

- Clinch feature mounts fastener permanently into metal sheet.
- Allows for quick attachment and detachment of PC Board.
- Head is flush or sub-flush in metal sheet.
- Makes horizontal or vertical component mounting possible.



PC Board plastic or metal
Metal

SSA™/SSC™/SSS™ Snap-Top® Standoffs

(See PEM® Bulletin SSA)

- Spring action holds PC Boards and subassemblies securely, while allowing for quick removal.
- Screws and other threaded hardware are eliminated.



PC Board plastic or metal
Metal

For more information on these and other PEM products, visit our PEMNET™ Resource Center at www.pemnet.com

All PEM® products meet our stringent quality standards. If you require additional industry or other specific [quality certifications](#), special procedures and/or part numbers are required. Please contact your local sales office or representative for further information.

Regulatory [compliance information](#) is available in Technical Support section of our website. Specifications subject to change without notice. See our website for the most current version of this bulletin.



North America: Danboro, Pennsylvania USA | E-mail: info@pemnet.com | Tel: +1-215-766-8853 | 800-237-4736 (USA)

Europe: Galway, Ireland | E-mail: europa@pemnet.com | Tel: +353-91-751714

Asia/Pacific: Singapore | E-mail: singapore@pemnet.com | Tel: +65-6-745-0660

Shanghai, China: E-mail: china@pemnet.com | Tel: +86-21-5868-3688

Visit our PEMNET™ Resource Center at www.pemnet.com • Technical support e-mail: techsupport@pemnet.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PEM:](#)

[SMTSSS-4MM-6ET](#) [SMTSSS-4MM-8ET](#) [SMTSSS-156-12ET](#) [SMTSSS-156-8ET](#) [SMTSSS-4MM-10ET](#) [KFB3-632-12ET](#) [KFB3-632-2ET](#) [KFB3-632-6ET](#) [KFB3-632-8ET](#) [KFB3-440-16ET](#) [KFB3-440-2ET](#) [KFB3-440-4ET](#) [KFB3-440-6ET](#) [KFB3-440-8ET](#) [KFB3-632-10ET](#) [KFB3-440-10ET](#) [KFB3-440-12ET](#) [KFB3-632-4ET](#) [KFB3-M3-3ET](#) [KFB3-440-20ET](#) [KFB3-M4-12ET](#) [KFB3-M4-2ET](#) [KFB3-M4-4ET](#) [KFB3-M4-6ET](#) [KFB3-M4-8ET](#) [KFB3-M3-14ET](#) [KFB3-M3-16ET](#) [KFB3-M3-2ET](#) [KFB3-M3-4ET](#) [KFB3-M3-6ET](#) [KFB3-M3-8ET](#) [KFB3-632-16ET](#) [KFB3-632-20ET](#) [KFB3-632-24ET](#) [KFB3-632-32ET](#) [KFB3-M3-10ET](#) [KFB3-M3-12ET](#) [KFB3-M4-10ET](#) [KFB3-M4-14ET](#) [KFB3-M4-16ET](#) [KFB3-M4-3ET](#) [KFB3-032-10ET](#) [KFB3-032-12ET](#) [KFB3-032-16ET](#) [KFB3-032-20ET](#) [KFB3-032-24ET](#) [KFB3-032-2ET](#) [KFB3-032-32ET](#) [KFB3-032-4ET](#) [KFB3-032-6ET](#) [KFB3-032-8ET](#) [KFB3-0420-10ET](#) [KFB3-0420-12ET](#) [KFB3-0420-16ET](#) [KFB3-0420-20ET](#) [KFB3-0420-24ET](#) [KFB3-0420-2ET](#) [KFB3-0420-32ET](#) [KFB3-0420-4ET](#) [KFB3-0420-6ET](#) [KFB3-0420-8ET](#) [KFB3-M5-10ET](#) [KFB3-M5-12ET](#) [KFB3-M5-14ET](#) [KFB3-M5-16ET](#) [KFB3-M5-2ET](#) [KFB3-M5-3ET](#) [KFB3-M5-4ET](#) [KFB3-M5-6ET](#) [KFB3-M5-8ET](#) [KFB3-M6-10ET](#) [KFB3-M6-12ET](#) [KFB3-M6-14ET](#) [KFB3-M6-16ET](#) [KFB3-M6-2ET](#) [KFB3-M6-3ET](#) [KFB3-M6-4ET](#) [KFB3-M6-6ET](#) [KFB3-M6-8ET](#) [SMTSOB-3.1-2ET](#)