

## 12 dBi, Low Profile Directional Panel Antenna



### LOW PROFILE INDOOR/OUTDOOR ANTENNA

This antenna design offers 12 dBi directional gain in a low profile housing. The antenna is well suited to both indoor and outdoor wall or mast mount applications. Cushcraft's versatile ALLPMTW and ALLPMTM articulating mounts can be used to orient the signal into the desired coverage area. Coax length and connector type can be modified to specific application.


### FEATURES

- Low profile indoor/outdoor antenna
- Articulating mount available
- 2.4 GHz, 5 GHz, PCS and DCS versions

### APPLICATIONS

- Industrial complexes
- Office environments
- Shopping malls
- Healthcare facilities
- Campus settings

| MODEL                     | S34012P12NF                        | S24012P12NF                       | S18512P12NF                       | S1718P12NF                          | S17112P12NF                       |
|---------------------------|------------------------------------|-----------------------------------|-----------------------------------|-------------------------------------|-----------------------------------|
| Freq. MHz                 | 3400-3600                          | 2400-2500                         | 1850-1990                         | 1710-1880                           | 1710-1880                         |
| Gain dBi                  | 12                                 | 12                                | 12                                | 8                                   | 12                                |
| VSWR                      | 1.5:1                              | 1.5:1                             | 1.5:1                             | 1.5:1                               | 1.5:1                             |
| Polarization              | Linear                             | Linear                            | Linear                            | Linear                              | Linear                            |
| E-Plane<br>(-3dB bmwidth) | 27°                                | 25°                               | 25°                               | 65°                                 | 25°                               |
| H-Plane<br>(-3dB bmwidth) | 67°                                | 65°                               | 65°                               | 65°                                 | 65°                               |
| Weight lb (kg)            | .35 (.16)                          | 1.6 (.73)                         | 1.6 (.73)                         | .52 (.23)                           | 1.2 (.55)                         |
| RF Connector (f)          | N                                  | N                                 | N                                 | N                                   | N                                 |
| Dimensions<br>in. (cm)    | 3 x 7 x .875<br>(7,6 x 17,8 x 2,2) | 6 x 13 x 1<br>(15,2 x 30,5 x 2,5) | 6 x 13 x 1<br>(15,2 x 33,0 x 2,5) | 6 x 6 x 1.25<br>(15,2 x 15,2 x 3,2) | 6 x 13 x 1<br>(15,2 x 33,0 x 2,5) |
| Power (Watts)             | 50                                 | 50                                | 50                                | 50                                  | 50                                |
| Mount Style               | Surface                            | Surface                           | Wall/Mast                         | Wall/Mast                           | Wall/Mast                         |

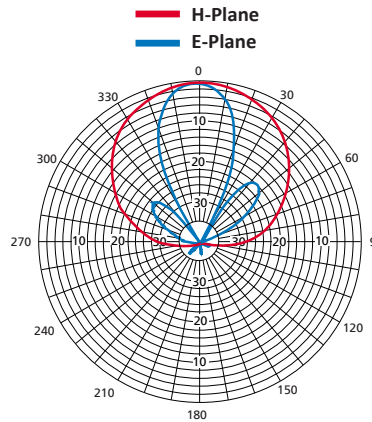

**S24012P**

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

ANT-DS-S24012P 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Connectivity:](#)

[S2401240P12NF](#)