

THYRISTOR/ DIODE and THYRISTOR/ THYRISTOR

ADD-A-pak™ GEN V Power Modules

Features

- High Voltage
- Industrial Standard Package
- Thick copper baseplate
- UL E78996 approved
- 3500V_{RMS} isolating voltage
- TOTALLY LEAD-FREE

Benefits

- Up to 1600V
- Full compatible TO-240AA
- High Surge capability
- Easy Mounting on heatsink
- Al₂O₃ DBC insulator
- Heatsink grounded

75 A
95 A

Mechanical Description

The Generation V of Add-A-pak module combine the excellent thermal performance obtained by the usage of Direct Bonded Copper substrate with superior mechanical ruggedness, thanks to the insertion of a solid Copper baseplate at the bottom side of the device. The Cu baseplate allow an easier mounting on the majority of heatsink with increased tolerance of surface roughness and improve thermal spread.

The Generation V of AAP module is manufactured without hard mold, eliminating in this way any possible direct stress on the leads.

The electrical terminals are secured against axial pull-out: they are fixed to the module housing via a click-stop feature already tested and proved as reliable on other IR modules.

Electrical Description

These modules are intended for general purpose high voltage applications such as high voltage regulated power supplies, lighting circuits, temperature and motor speed control circuits, UPS and battery charger.

Major Ratings and Characteristics

Parameters	IRK.71	IRK.91	Units
$I_{T(AV)}$ or $I_{F(AV)}$ @ 85°C	75	95	A
$I_{O(RMS)}$ (*)	165	210	A
I_{TSM} @ 50Hz	1665	1785	A
I_{FSM} @ 60Hz	1740	1870	A
I^2t @ 50Hz	13.86	15.91	KA ² s
@ 60Hz	12.56	14.52	KA ² s
$I^2\sqrt{t}$	138.6	159.1	KA ² √s
V_{RRM} range	400 to 1600		V
T_{STG}	-40 to 125		°C
T_J	-40 to 125		°C

(*) As AC switch.



IRK.71, .91 Series

Bulletin 127211 03/06

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage	V_{RSM} , maximum non-repetitive peak reverse voltage	V_{DRM} , max. repetitive peak off-state voltage, gate open circuit	I_{RRM} I_{DRM} 125°C mA
	-	V	V	V	
IRK.71/ .91	04	400	500	400	15
	06	600	700	600	
	08	800	900	800	
	10	1000	1100	1000	
	12	1200	1300	1200	
	14	1400	1500	1400	
	16	1600	1700	1600	

On-state Conduction

Parameters	IRK.71	IRK.91	Units	Conditions	
$I_{T(AV)}$ Max. average on-state current (Thyristors)	75	95		180° conduction, half sine wave, $T_C = 85^\circ C$	
$I_{F(AV)}$ Max. average forward current (Diodes)					
$I_{O(RMS)}$ Max. continuous RMS on-state current. As AC switch	165	210	A		
I_{TSM} Max. peak, one cycle or non-repetitive on-state	1665	1785	KA^2s	Sinusoidal half wave, Initial $T_J = T_J \text{ max.}$ $T_J = 25^\circ C$, no voltage reapplied	
I_{FSM} or forward current	1740	1870			t=10ms No voltage reapplied
	1400	1500			t=8.3ms 100% V_{RRM} reapplied
	1470	1570			t=10ms 100% V_{RRM} reapplied
	1850	2000			t=8.3ms 100% V_{RRM} reapplied
	1940	2100			t=10ms $T_J = 25^\circ C$, t=8.3ms no voltage reapplied
I^2t Max. I^2t for fusing	13.86	15.91	KA^2s	t=10ms No voltage reapplied t=8.3ms 100% V_{RRM} reapplied t=10ms 100% V_{RRM} reapplied t=8.3ms 100% V_{RRM} reapplied t=10ms $T_J = 25^\circ C$, t=8.3ms no voltage reapplied	
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing (1)	138.6	159.1	$KA^2\sqrt{s}$	t=0.1 to 10ms, no voltage reapplied, $T_J = T_J \text{ max}$	
$V_{T(TO)}$ Max. value of threshold voltage (2)	0.82	0.80	V	Low level (3)	
	0.85	0.85		High level (4)	
r_t Max. value of on-state slope resistance (2)	3.00	2.40	mΩ	Low level (3)	
	2.90	2.25		High level (4)	
V_{TM} Max. peak on-state or forward voltage	1.59	1.58	V	$I_{TM} = \pi \times I_{T(AV)}$	
V_{FM}				$I_{FM} = \pi \times I_{F(AV)}$	
di/dt Max. non-repetitive rate of rise of turned on current	150		A/μs	$T_J = 25^\circ C$, from 0.67 V_{DRM} , $I_{TM} = \pi \times I_{T(AV)}$, $I_g = 500mA$, $t_r < 0.5 \mu s$, $t_p > 6 \mu s$	
I_H Max. holding current	250		mA	$T_J = 25^\circ C$, anode supply = 6V, resistive load, gate open circuit	
I_L Max. latching current	400			$T_J = 25^\circ C$, anode supply = 6V, resistive load	

(1) I^2t for time $t_x = I^2\sqrt{t} \times \sqrt{t_x}$ (2) Average power = $V_{T(TO)} \times I_{T(AV)} + r_t \times (I_{T(RMS)})^2$ (3) $16.7\% \times \pi \times I_{AV} < I < \pi \times I_{AV}$
 (4) $I > \pi \times I_{AV}$

Triggering

Parameters	IRK.71	IRK.91	Units	Conditions	
P_{GM} Max. peak gate power	12	12	W		
$P_{G(AV)}$ Max. average gate power	3.0	3.0			
I_{GM} Max. peak gate current	3.0	3.0	A		
$-V_{GM}$ Max. peak negative gate voltage	10		V	Anode supply = 6V resistive load	
V_{GT} Max. gate voltage required to trigger	4.0				$T_J = -40^\circ\text{C}$
	2.5				$T_J = 25^\circ\text{C}$
I_{GT} Max. gate current required to trigger	1.7		$T_J = 125^\circ\text{C}$		
	270		mA	Anode supply = 6V resistive load	
	150				
80					
V_{GD} Max. gate voltage that will not trigger	0.25		V	$T_J = 125^\circ\text{C}$, rated V_{DRM} applied	
I_{GD} Max. gate current that will not trigger	6		mA	$T_J = 125^\circ\text{C}$, rated V_{DRM} applied	

Blocking

Parameters	IRK.71	IRK.91	Units	Conditions
I_{RRM} Max. peak reverse and off-state leakage current at V_{RRM} , V_{DRM}	15		mA	$T_J = 125^\circ\text{C}$, gate open circuit
V_{INS} RMS isolation voltage	2500 (1 min)		V	50 Hz, circuit to base, all terminals shorted
	3500 (1 sec)			
dv/dt Max. critical rate of rise of off-state voltage (5)	500		V/ μs	$T_J = 125^\circ\text{C}$, linear to $0.67 V_{DRM}$, gate open circuit

(5) Available with $dv/dt = 1000\text{V}/\mu\text{s}$, to complete code add S90 i.e. IRKT91/16AS90.

Thermal and Mechanical Specifications

Parameters	IRK.71	IRK.91	Units	Conditions
T_J Junction operating temperature range	- 40 to 125		$^\circ\text{C}$	
T_{stg} Storage temp. range	- 40 to 125			
R_{thJC} Max. internal thermal resistance, junction to case	0.165	0.135	K/W	Per module, DC operation
R_{thCS} Typical thermal resistance case to heatsink	0.1			Mounting surface flat, smooth and greased
T Mounting torque $\pm 10\%$ to heatsink busbar	5		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound
	3			
wt Approximate weight	110 (4)		gr (oz)	
Case style	TO-240AA		JEDEC	

ΔR Conduction (per Junction)

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Devices	Sine half wave conduction					Rect. wave conduction					Units
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
IRK.71	0.06	0.07	0.09	0.12	0.18	0.04	0.08	0.10	0.13	0.18	$^\circ\text{C}/\text{W}$
IRK.91	0.04	0.05	0.06	0.08	0.12	0.03	0.05	0.06	0.08	0.12	

IRK.71, .91 Series


Bulletin I27211 03/06

Ordering Information Table



Device Code						
IRK	T	91	/	16	S90	P
①	②	③		④	⑤	⑥

<p>1 - Module type</p> <p>2 - Circuit configuration (See Circuit Configuration table below)</p> <p>3 - Current code **</p> <p>4 - Voltage code (See Voltage Ratings table)</p> <p>5 - dv/dt code: S90 = dv/dt 1000 V/μs No letter = dv/dt 500 V/μs</p> <p>6 - P = Lead-Free</p>	<p>** Available with no auxiliary cathode.</p> <p>To specify change: 71 to 72 91 to 92</p> <p>e.g. : IRKT92/16P etc.</p>
---	--

IRK.92 types
With no auxiliary cathode



Outline Table

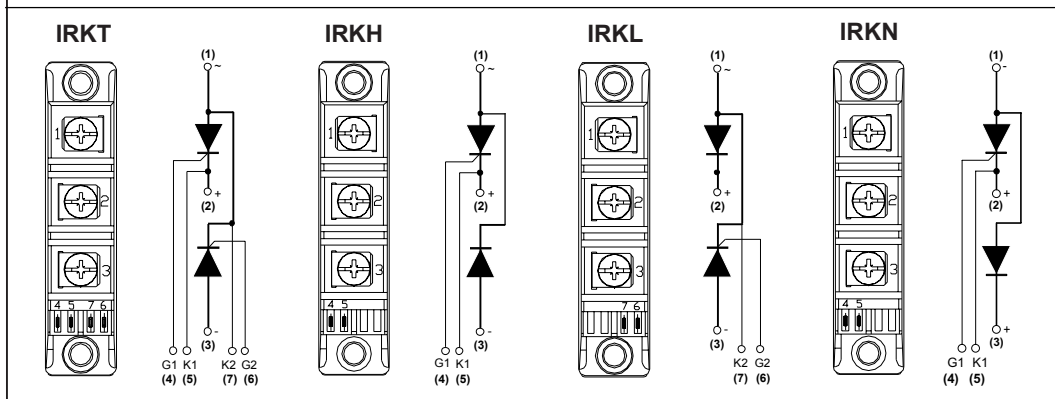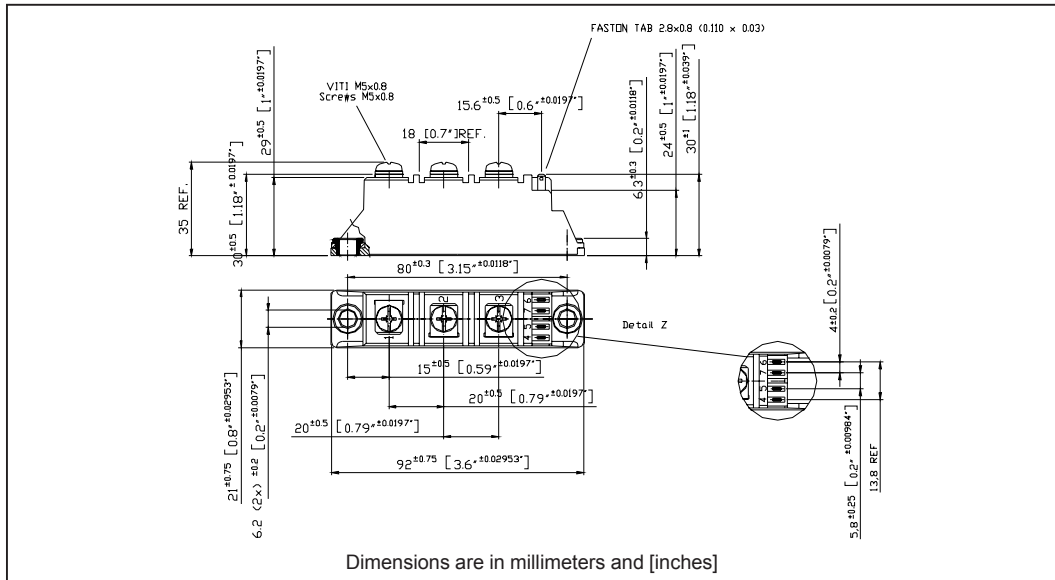

NOTE: To order the Optional Hardware see Bulletin I27900

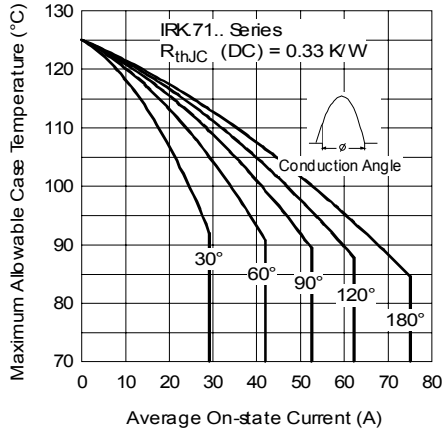


Fig. 1 - Current Ratings Characteristics

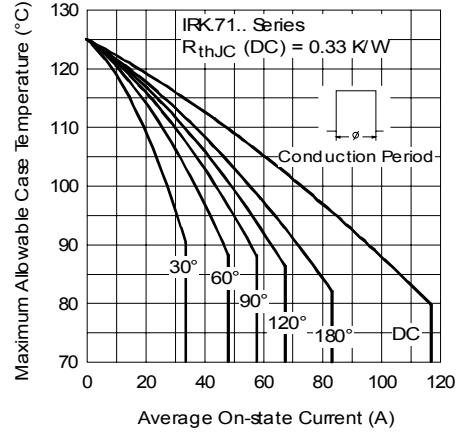


Fig. 2 - Current Ratings Characteristics

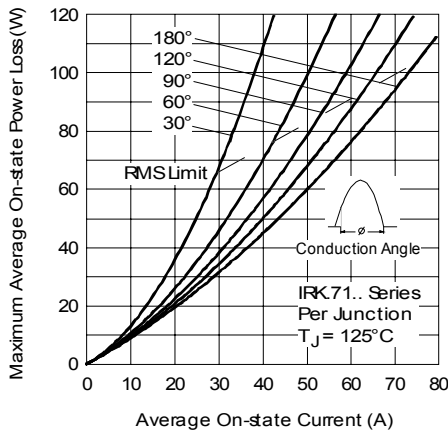


Fig. 3 - On-state Power Loss Characteristics

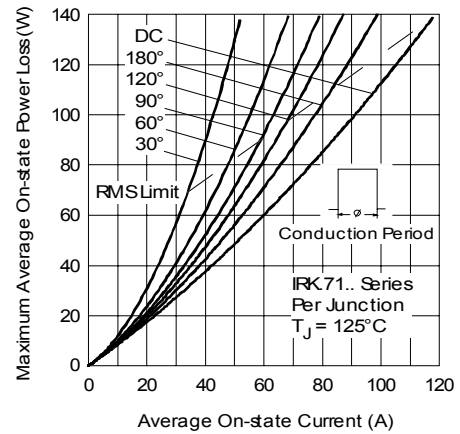


Fig. 4 - On-state Power Loss Characteristics

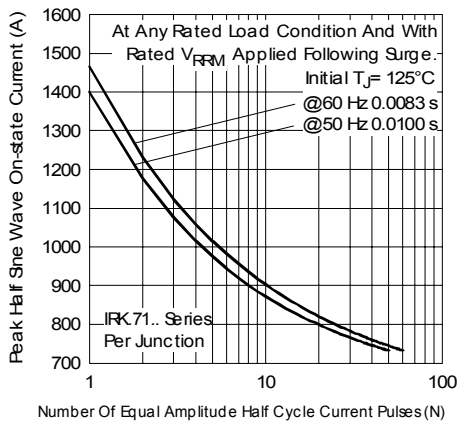


Fig. 5 - Maximum Non-Repetitive Surge Current

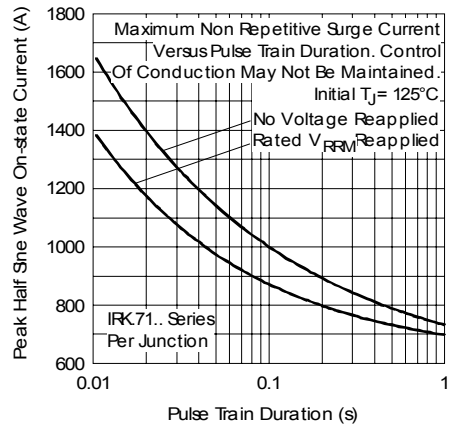


Fig. 6 - Maximum Non-Repetitive Surge Current

IRK.71, .91 Series

Bulletin I27211 03/06

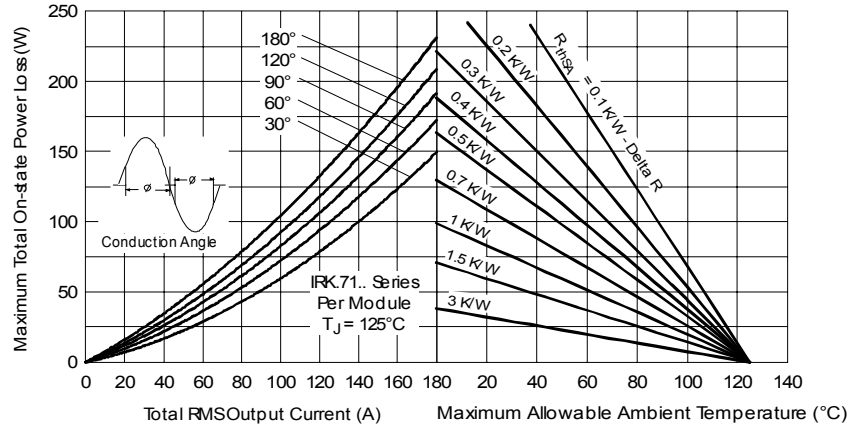


Fig. 7 - On-state Power Loss Characteristics

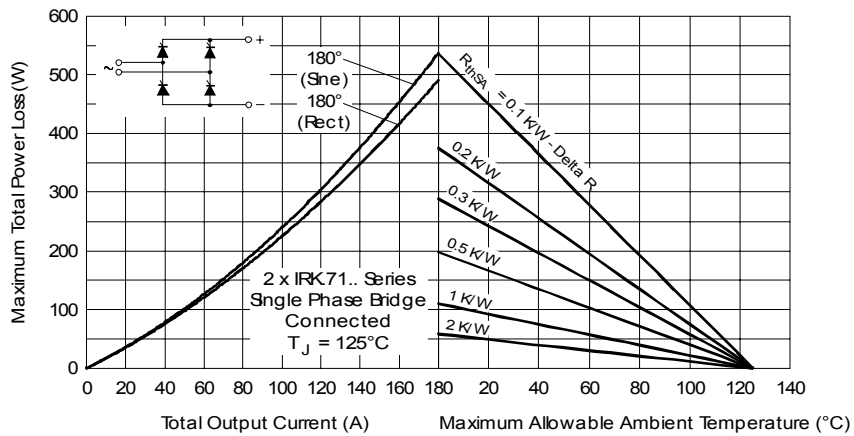


Fig. 8 - On-state Power Loss Characteristics

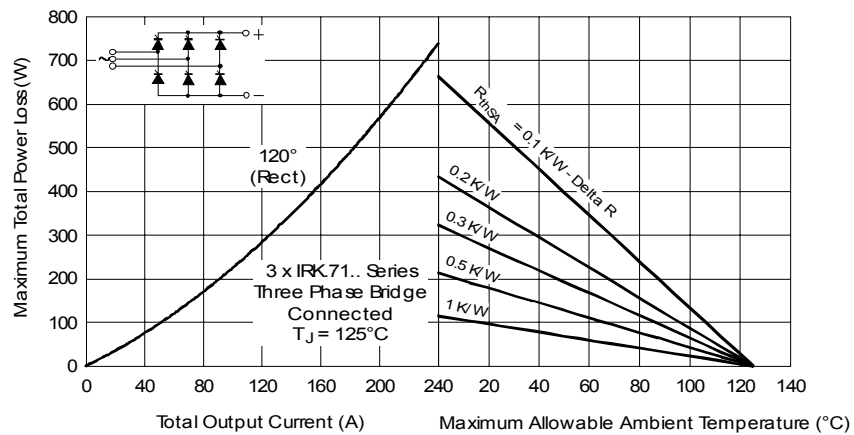


Fig. 9 - On-state Power Loss Characteristics

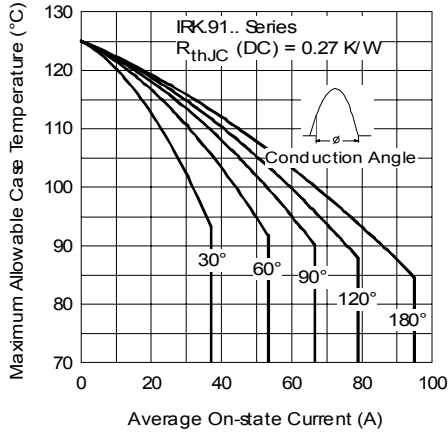


Fig. 10 - Current Ratings Characteristics

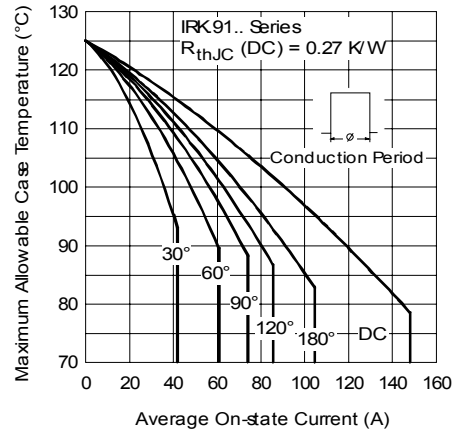


Fig. 11 - Current Ratings Characteristics

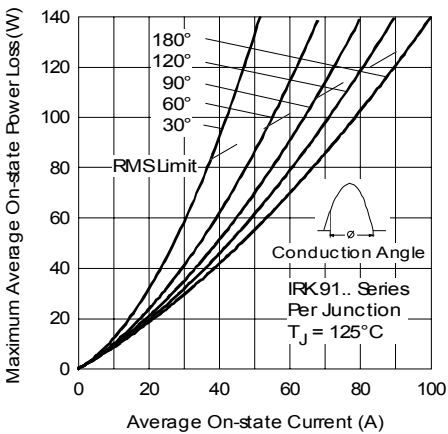


Fig. 12 - On-state Power Loss Characteristics

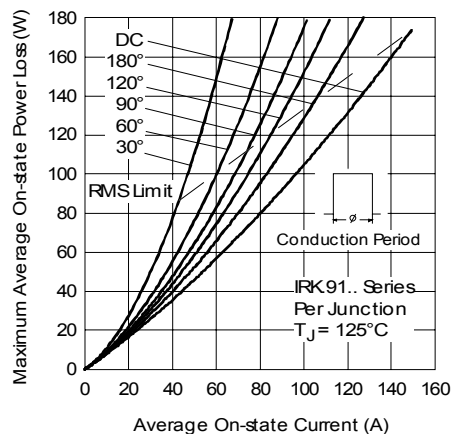


Fig. 13 - On-state Power Loss Characteristics

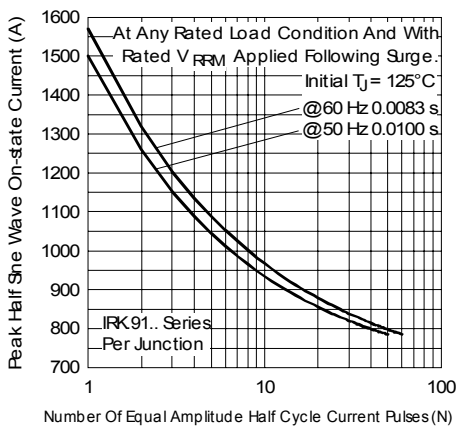


Fig. 14 - Maximum Non-Repetitive Surge Current

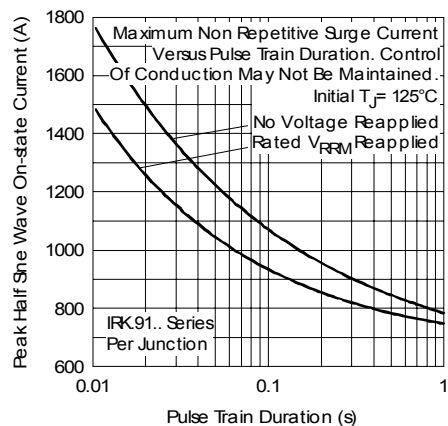


Fig. 15 - Maximum Non-Repetitive Surge Current

IRK.71, .91 Series

Bulletin I27211 03/06

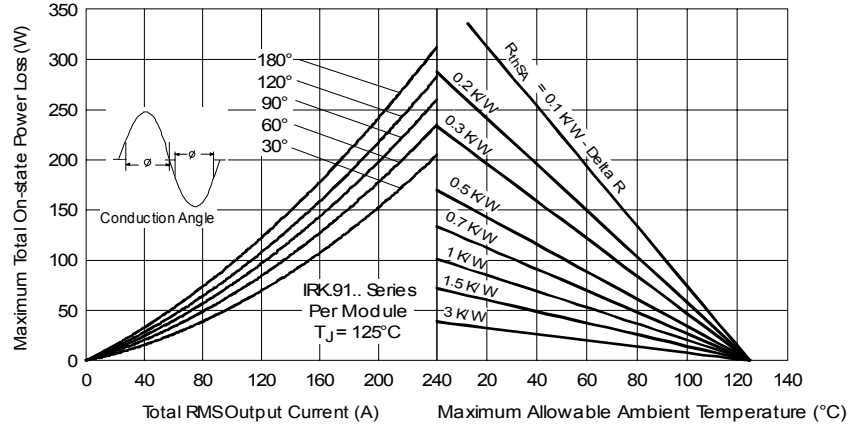


Fig. 16 - On-state Power Loss Characteristics

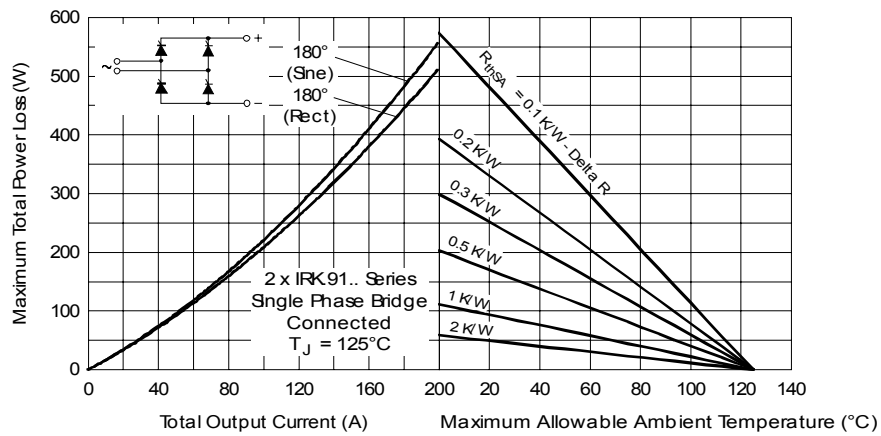


Fig. 17 - On-state Power Loss Characteristics

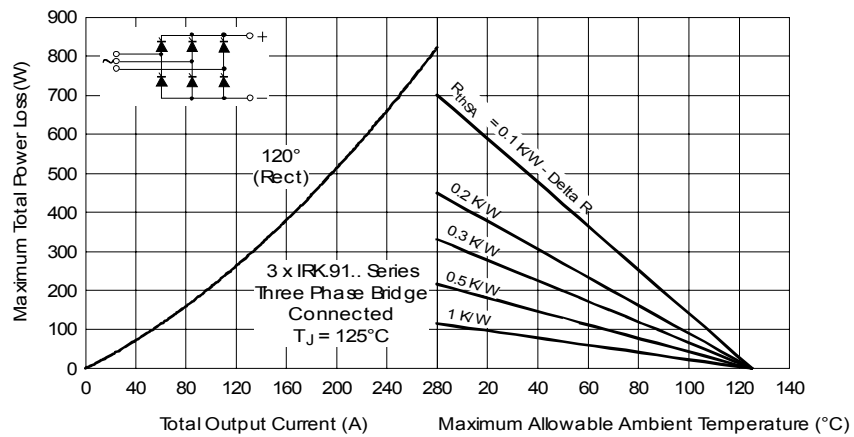


Fig. 18 - On-state Power Loss Characteristics

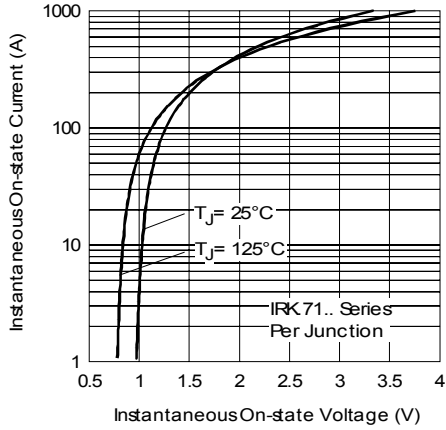


Fig. 19 - On-state Voltage Drop Characteristics

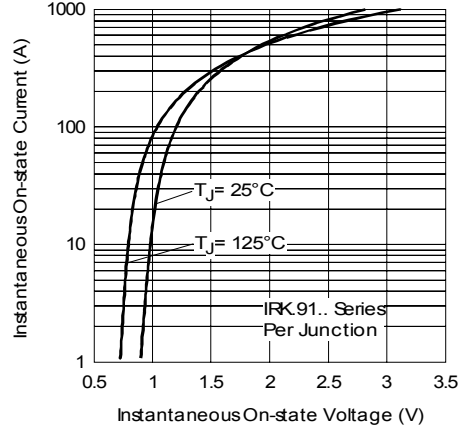


Fig. 20 - On-state Voltage Drop Characteristics

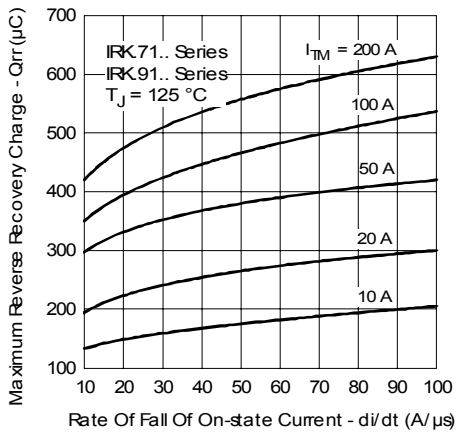


Fig. 21 - Recovery Charge Characteristics

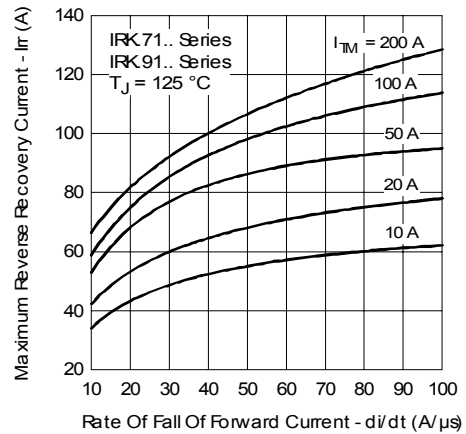


Fig. 22 - Recovery Current Characteristics

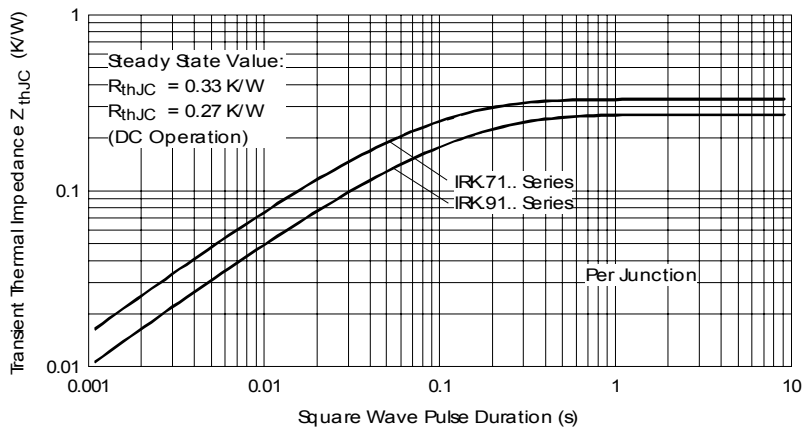


Fig. 23 - Thermal Impedance Z_{thJC} Characteristics

IRK.71, .91 Series

Bulletin I27211 03/06

International
IR Rectifier

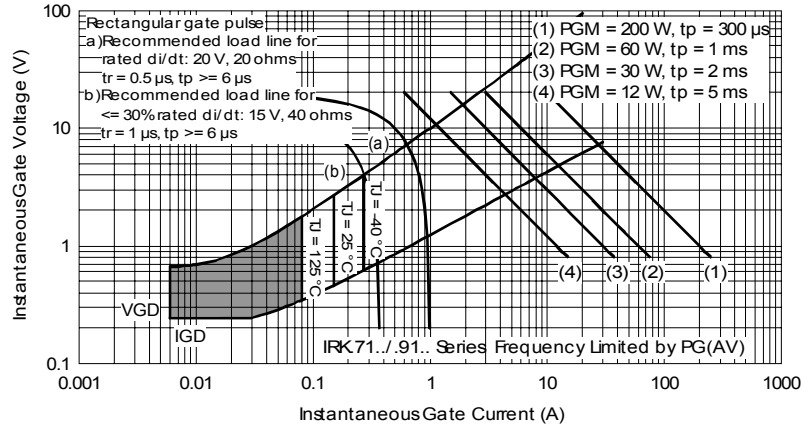


Fig. 24 - Gate Characteristics

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
03/06



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.