




Features

- Carbon element
- 10-30 mm travel
- Center detent option
- Single or dual gang
- RoHS compliant*

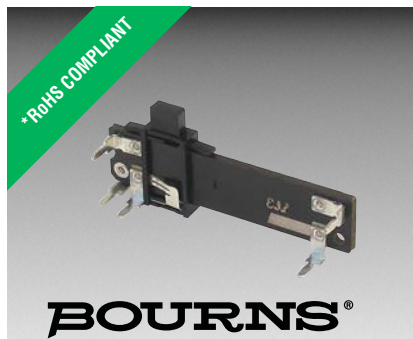

The Model PDV Series is currently available, but not recommended for new designs.

PDV Series - Open Frame Slide Potentiometer

Electrical Characteristics

Taper..... Linear, audio
Standard Resistance Range
..... 1 K ohms to 1 M ohms
Standard Resistance Tolerance..... $\pm 20\%$
Residual Resistance
..... 100 ohms or $\pm 5\%$ max.

Environmental Characteristics

Operating Temperature.... -10°C to $+50^{\circ}\text{C}$
Power Rating
Linear 0.1 watt
Audio 0.05 watt
Maximum Operating Voltage - Linear
10 mm Travel..... 100 VAC
15 mm Travel..... 100 VAC
20 mm Travel..... 200 VAC
30 mm Travel..... 200 VAC
Maximum Operating Voltage - Audio
10 mm Travel..... 50 VAC
15 mm Travel..... 50 VAC
20 mm Travel..... 150 VAC
30 mm Travel..... 150 VAC
Sliding Noise 47 mV max.

Mechanical Characteristics

Operating Force 20 to 300 g-cm
Detent Torque..... 50 to 400 g-cm
Lever Stop Strength 3 kg-cm min.
Sliding Life..... 10,000 cycles
Std. Stroke Length 10, 15, 20, 30 mm
Soldering Condition
Wave 260°C for 3 sec. max.
Manual..... Not recommended


How To Order

PDV 10 - 2 1 P - 102 A



Model _____
Length of Travel
• 10 = 10 mm
• 15 = 15 mm
• 20 = 20 mm
• 30 = 30 mm
Detent Option
• 2 = No Detent
• 3 = Center Detent
Number of Gangs
• 1 = Single Gang
• 2 = Dual Gang
Mounting Type
(refer to drawings)
• P = Vertical Pins
• M = Horizontal Pins
Resistance Code (See Table) _____
Resistance Taper
• A = Audio Taper
• B = Linear Taper
Other styles available.

Product Dimensions


PDVxx-x1P

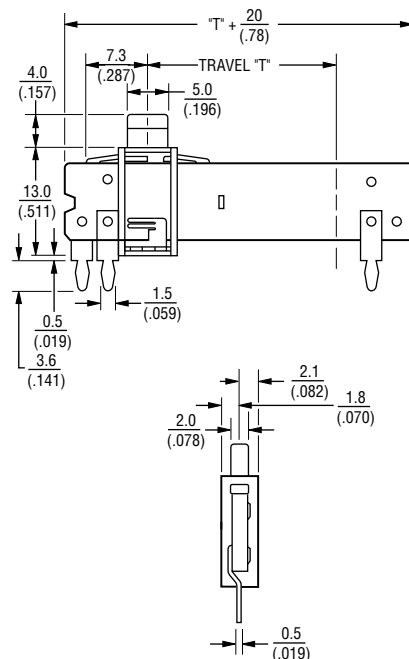



RECOMMENDED PCB LAYOUT

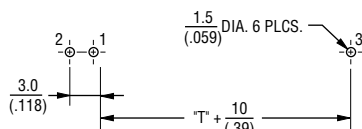

PDVxx-x2P

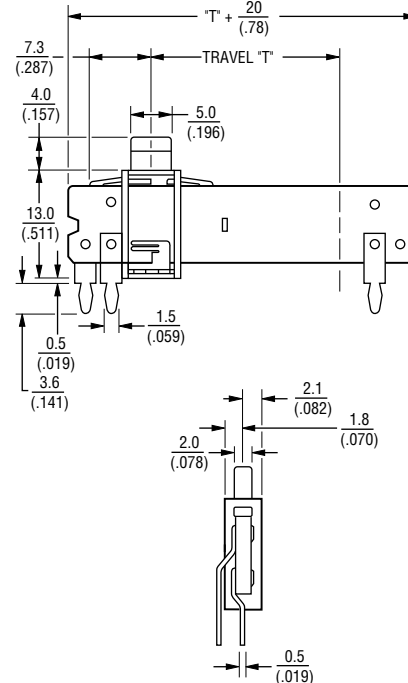

RECOMMENDED PCB LAYOUT

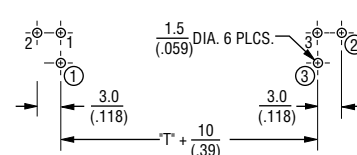

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Applications


- Audio/TV sets
- Car radio
- Amplifiers/mixers/drum machines/synthesizers
- PCs/monitors
- Appliances

PDV Series - Open Frame Slide Potentiometer




BOURNS®

Product Dimensions



PDVxx-x1M

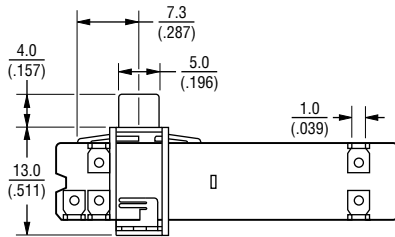



PDVxx-x2M

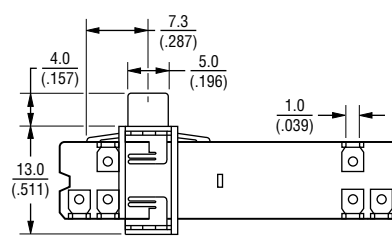

RECOMMENDED PCB LAYOUT

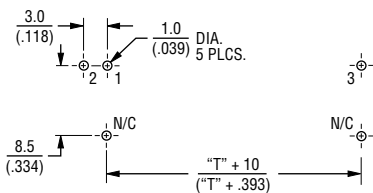


RECOMMENDED PCB LAYOUT

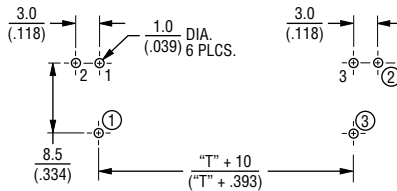

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

Derating Curve

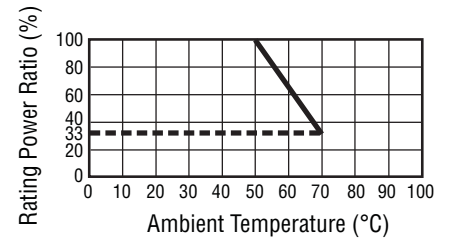

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

REV. 11/13

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.