

Level 13 (LO Power +13dBm) 2 to 500 MHz

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power 200mW


IF Current 40mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Outline Drawing

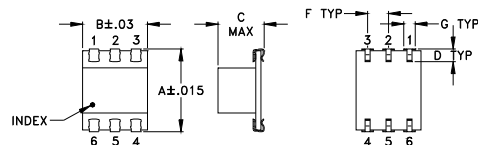


PCB Land Pattern

Suggested Layout,
Tolerance to be within ±0.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14
H	J	K	L	M	wt	
.420	.120	.060	.100	--	grams	
10.67	3.05	1.52	2.54	--	0.50	

Demo Board MCL P/N: TB-44+
Suggested PCB Layout (PL-083)

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.13 dB typ.
- excellent L-R isolation, 44 dB typ.
- aqueous washable
- J-leads for strain relief

Applications

- VHF/UHF
- instrumentation



Generic photo used for illustration purposes only

CASE STYLE: QQQ569

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)
		L	M	U	L	M	U	
LO/RF f_L - f_U	Mid-Band m $\bar{X}$ σ Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ.
2-500 DC-500	6.13 .08 7.0	58 45 44 25 30 20	55 40 36 25 28 17	23				


1 dB COMP.: +9 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data







Frequency (MHz)		Conversion Loss (dB)	VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
RF	LO						
		LO +13dBm	LO +13dBm		LO +13dBm	LO +13dBm	LO +13dBm
2.10	32.10	7.12	2.48	10.50	72.10	51.18	1.82
4.10	34.10	6.54	2.67	14.50	69.04	48.42	1.82
6.10	36.10	6.35	2.78	20.50	66.13	45.46	1.81
10.10	40.10	6.24	2.84	24.50	64.29	43.96	1.81
14.10	44.10	6.13	2.85	30.50	62.15	42.08	1.81
18.10	48.10	6.17	2.82	35.00	61.00	40.87	1.81
20.10	50.10	6.17	2.81	40.10	59.59	39.68	1.82
25.10	55.10	6.15	2.77	50.10	57.26	37.80	1.83
50.10	80.10	6.19	2.65	80.10	52.29	33.74	1.81
100.10	130.10	6.19	2.37	105.10	49.20	31.29	1.81
125.10	155.10	6.21	2.28	155.10	45.02	28.06	1.84
150.10	180.10	6.20	2.15	205.10	41.68	25.76	1.84
175.10	205.10	6.28	2.06	255.10	38.45	24.37	1.90
200.10	230.10	6.33	2.00	305.10	35.47	23.37	1.95
250.10	280.10	6.35	1.85	330.10	34.14	23.10	1.99
300.10	330.10	6.41	1.75	355.10	33.10	23.00	1.98
350.10	380.10	6.52	1.68	405.10	31.53	22.77	2.05
400.10	430.10	6.52	1.58	430.10	30.84	22.89	2.07
425.10	455.10	6.59	1.53	455.10	30.16	23.02	2.03
500.00	470.00	6.67	1.52	470.00	29.64	23.13	2.08

Electrical Schematic

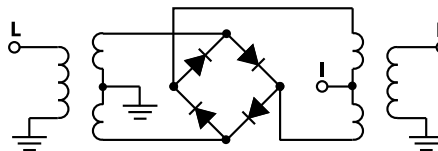

Performance Charts

LRMS-1MHJ

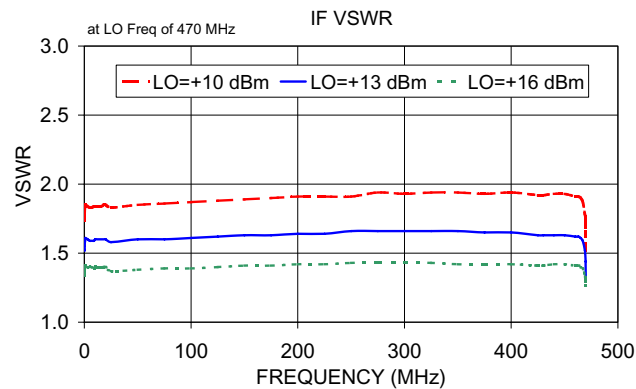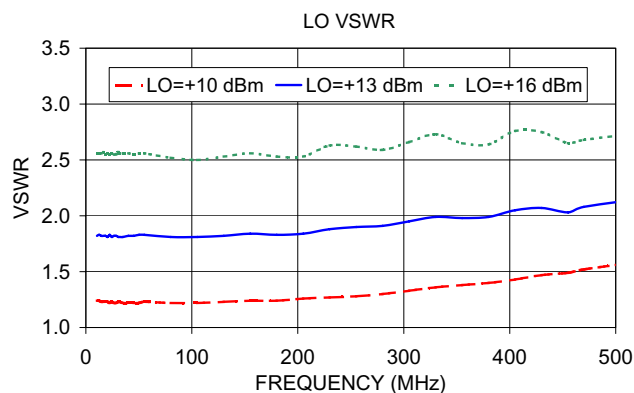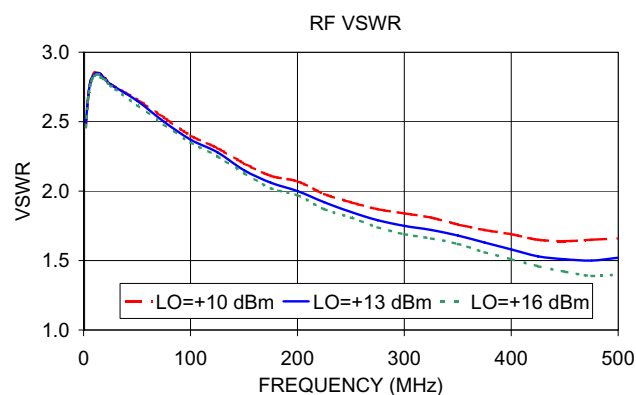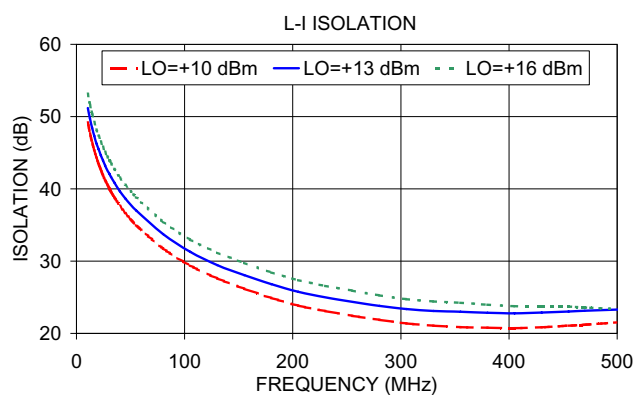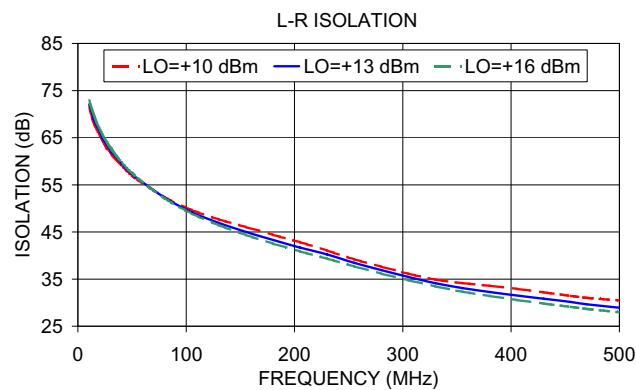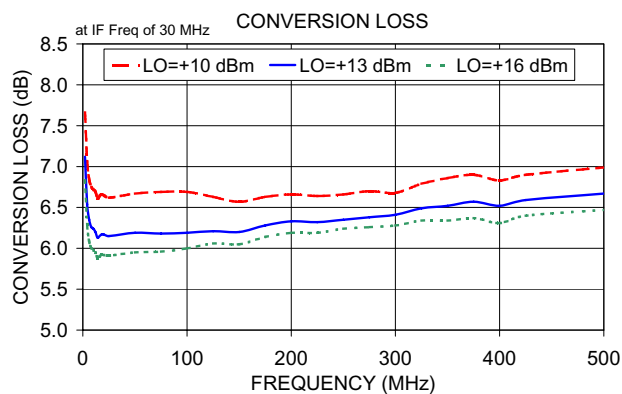

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[LRMS-1MHJ+](#)