

Description

The DGD2005 is a mid-voltage/high-speed gate driver capable of driving N-channel MOSFETs and IGBTs in a half-bridge configuration. High-voltage processing techniques enable the DGD2005's high-side to switch to 200V in a bootstrap operation. The 30ns (maximum) propagation delay matching between the high-side and low-side drivers allows high-frequency switching.

The DGD2005 logic inputs are compatible with standard TTL and CMOS levels (down to 3.3V) to interface easily with controlling devices. The driver outputs feature high-pulse current buffers designed for minimum driver cross conduction. The low-side gate driver and logic share a common ground.

The DGD2005 is available in a space saving SO-8 (Type TH) package and operates over an extended -40°C to +125°C temperature range.

Applications

- **DC-DC Converters**
- **DC-AC Inverters**
- **AC-DC Power Supplies**
- Motor Controls
- **Class D Power Amplifiers**

Up to 200\ Vcc VB Vcc O TO LOAD HIN HIN но DGD2005 LIN ٧s LIN O сом LO **Typical Configuration**

Ordering Information (Note 4)

| Part Number | Marking | Reel Size (inches) | Tape Width (mm) | Quantity per Reel |
|--------------|---------|--------------------|-----------------|-------------------|
| DGD2005S8-13 | DGD2005 | 13 | 12 | 2500 |


1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3).compliant. Notes:

2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

Marking Information



⊃¦¦ = Manufacturer's Marking DGD2005 = Product Type Marking Code YY = Year (ex: 18 = 2018)WW = Week (01 to 53)

Features

- Floating High-Side Driver in Bootstrap Operation to 200V •
- Drives Two N-Channel MOSFETs or IGBTs in Half Bridge Configuation
- **Outputs Tolerant to Negative Transients**
- Wide Logic and Low-Side Gate Driver Supply Voltage: 10V to 20V
- Logic Input (HIN and LIN) 3.3V Capability
- Schmitt Triggered Logic Inputs with Internal Pull Down
- Delay Matching of 30ns Maximum
- Source/Sink Pulsed Current of 290mA/600mA Typical
- Undervoltage Lockout for Vcc
- Extended Temperature Range: -40°C To +125°C
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

Mechanical Data


- Case: SO-8 (Type TH)
- Case Material: Molded Plastic. "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminals: Finish-Matte Tin Plated Leads. Solderable per MIL-STD-202, Method 208 (63)
- Weight: 0.075 grams (Approximate)



Top View



Pin Diagrams




Top View: SO-8 (Type TH)

Pin Descriptions

| Pin Number | Pin Name | Function | |
|------------|----------|--|--|
| 1 | Vcc | Low-Side and Logic Fixed Supply | |
| 2 | HIN | gic Input for High-Side Gate Driver Output, in Phase with HO | |
| 3 | LIN | gic Input for Low-Side Gate Driver Output, in Phase with LO | |
| 4 | COM | w-Side Return | |
| 5 | LO | ow-Side Gate Drive Output | |
| 6 | Vs | ligh-Side Floating Supply Return | |
| 7 | HO | High-Side Gate Drive Output | |
| 8 | VB | High-Side Floating Supply | |

Functional Block Diagram

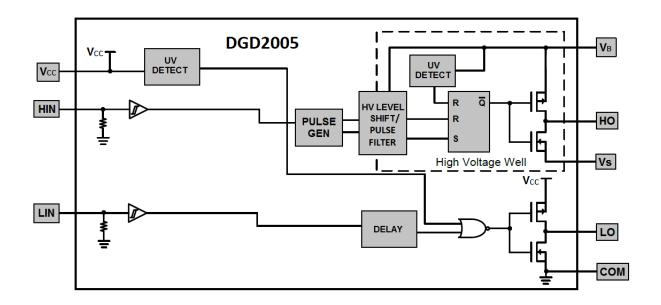



Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

| Characteristic | Symbol | Value | Unit |
|--|-----------------|--|------|
| High-Side Floating Supply Voltage | VB | -0.3 to +224 | V |
| High-Side Floating Supply Offset Voltage | Vs | V _B -24 to V _B +0.3 | V |
| High-Side Floating Output Voltage | V _{HO} | V _S -0.3 to V _B +0.3 | V |
| Offset Supply Voltage Transient | dVs/dt | 50 | V/ns |
| Low-Side and Logic Fixed Supply Voltage | V _{CC} | -0.3 to +24 | V |
| Low-Side Output Voltage | V _{LO} | -0.3 to V _{CC} +0.3 | V |
| Logic Input Voltage (HIN and LIN) | V _{IN} | -0.3 to V _{CC} +0.3 | V |

Thermal Characteristics ($@T_A = +25^{\circ}C$, unless otherwise specified.)

| Characteristic | Symbol | Value | Unit |
|---|------------------|-------------|------|
| Power Dissipation Linear Derating Factor (Note 5) | PD | 0.625 | W |
| Thermal Resistance, Junction to Ambient (Note 5) | R _{0JA} | 200 | °C/W |
| Operating Temperature | TJ | +150 | |
| Lead Temperature (Soldering, 10s) | TL | +300 | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | |

Note: 5. When mounted on a standard JEDEC 2-layer FR-4 board.

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|--|-----------------|---------------------|---------------------|------|
| High Side Floating Supply Absolute Voltage | VB | V _S + 10 | V _S + 20 | V |
| High Side Floating Supply Offset Voltage | Vs | (Note 6) | 200 | V |
| High Side Floating Output Voltage | V _{HO} | Vs | VB | V |
| Low Side and Logic Fixed Supply Voltage | V _{CC} | 10 | 20 | V |
| Low Side Output Voltage | V _{LO} | 0 | V _{CC} | V |
| Logic Input Voltage | VIN | 0 | 5 | V |
| Ambient Temperature | T _A | -40 | +125 | °C |

Note: 6. Logic operation for V_S of -5V to +200V.



DC Electrical Characteristics (V_{BIAS} (V_{CC}, V_{BS}) = 15V, @T_A = +25°C, unless otherwise specified.) (Note 7)

| Parameter | Symbol | Min | Typ | Max | Unit | Conditions |
|---|--------------------|-----|------|-----|------|---|
| | | | Тур | wax | | Conditions |
| Logic "1" Input Voltage | V _{IH} | 2.5 | — | _ | V | — |
| Logic "0" Input Voltage | VIL | — | | 0.6 | V | — |
| High Level Output Voltage, V _{BIAS} - V _O | V _{OH} | _ | 0.05 | 0.2 | V | $I_0 = 2mA$ |
| Low Level Output Voltage, V _O | V _{OL} | _ | 0.02 | 0.1 | V | $I_0 = 2mA$ |
| Offset Supply Leakage Current | I _{LK} | — | _ | 50 | μA | $V_{B} = V_{S} = 200V$ |
| Quiescent V _{BS} Supply Current | I _{BSQ} | 20 | 75 | 130 | μA | $V_{IN} = 0V \text{ or } 5V$ |
| Quiescent V _{CC} Supply Current | Iccq | 60 | 120 | 180 | μA | $V_{IN} = 0V \text{ or } 5V$ |
| Logic "1" Input Bias Current | I _{IN+} | — | 5.0 | 20 | μA | $V_{IN} = 5V$ |
| Logic "0" Input Bias Current | I _{IN-} | _ | — | 2.0 | μA | $V_{IN} = 0V$ |
| V _{BS} Supply Undervoltage Positive Going Threshold | V _{BSUV+} | 8.0 | 8.9 | 9.8 | V | — |
| V _{BS} Supply Undervoltage Negative Going Threshold | V _{BSUV-} | 7.4 | 8.2 | 9.0 | V | — |
| V _{CC} Supply Undervoltage Positive Going Threshold | V _{CCUV+} | 8.0 | 8.9 | 9.8 | V | — |
| V _{CC} Supply Undervoltage Negative Going Threshold | V _{CCUV-} | 7.4 | 8.2 | 9.0 | V | — |
| Undervoltage Lockout Hysterisis | V _{UVLOH} | 0.3 | 0.7 | _ | V | — |
| Output High Short Circuit Pulsed Current | I _{O+} | 130 | 290 | _ | mA | $V_O = 0V$, $V_{IN} = Logic$ "1", PW $\leq 10\mu s$ |
| Output Low Short Circuit Pulsed Current | I _{O-} | 270 | 600 | _ | mA | $V_O = 15V, V_{IN} = Logic "0",$ PW ≤ 10µs |

Note:


7. The V_{IN} and I_{IN} parameters are referenced to COM and are applicable to the two logic pins: HIN and LIN. The V₀ and I₀ parameters are referenced to COM and are applicable to the respective output pins: HO and LO.

AC Electrical Characteristics (V_{BIAS} (V_{CC}, V_{BS}) = 15V, C_L = 1000pF, @T_A = +25°C, unless otherwise specified.)

| Parameter | Symbol | Min | Тур | Max | Unit | Conditions |
|----------------------------|------------------|-----|-----|-----|------|-----------------------------------|
| Turn-On Propagation Delay | t _{ON} | — | 220 | 300 | ns | $V_{\rm S} = 0V$ |
| Turn-Off Propagation Delay | t _{OFF} | — | 200 | 280 | ns | $V_{\rm S} = 0V \text{ or } 200V$ |
| Delay Matching | t _{DM} | — | — | 30 | ns | — |
| Turn-On Rise Time | t _R | — | 100 | 220 | ns | $V_{\rm S} = 0V$ |
| Turn-Off Fall Time | t _F | — | 35 | 80 | ns | $V_{S} = 0V$ |



Timing Waveforms






Figure 1. Input / Output Timing Diagram

Figure 2. Delay Matching Waveform Definitions

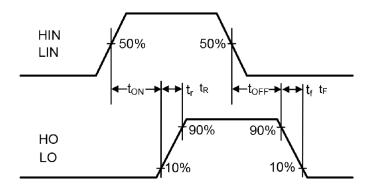


Figure 3. Switching Time Waveform Definitions



Typical Performance Characteristics (@T_A = +25°C, unless otherwise specified.)




Figure 4. Turn-on Propagation Delay vs. Supply Voltage





Figure 6. Turn-off Propagation Delay vs. Supply Voltage






Figure 5. Turn-on Propagation Delay vs. Temperature





Figure 7. Turn-off Propagation Delay vs. Temperature





Typical Performance Characteristics (continued)




Figure 10. Fall Time vs. Supply Voltage





Figure 12. Quiescent Current vs. Supply Voltage








Figure 11. Fall Time vs. Temperature










Typical Performance Characteristics (continued)








Figure 18. Output Sink Current vs. Supply Voltage




Figure 20. Logic 1 Input Voltage vs. Supply Voltage





Figure 17. Output Source Current vs. Temperature








Figure 21. Logic 1 Input Voltage vs. Temperature



Typical Performance Characteristics (continued)










Figure 26. Offset Supply Leakage Current vs. Temperature






Figure 23. Logic 0 Input Voltage vs. Temperature





Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

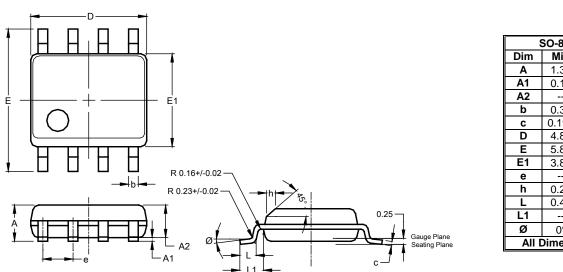


SO-8 (Type TH)

| 9 | SO-8 (T) | /pe TH) | |
|-------|----------|---------|------|
| Dim | Min | Max | Тур |
| Α | 1.35 | 1.75 | |
| A1 | 0.10 | 0.25 | |
| A2 | | | 1.45 |
| b | 0.35 | 0.51 | |
| C | 0.190 | 0.248 | |
| D | 4.80 | 5.00 | 4.90 |
| Е | 5.80 | 6.20 | 6.00 |
| E1 | 3.80 | 4.00 | 3.90 |
| е | | | 1.27 |
| h | 0.25 | 0.50 | |
| L | 0.41 | 1.27 | |
| L1 | | | 1.04 |
| Ø | 0° | 8° | |
| All [| Dimensi | ons in | mm |

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.



SO-8 (Type TH)

| Dimensions | Value (in mm) |
|------------|---------------|
| С | 1.27 |
| C1 | 5.20 |
| Х | 0.60 |
| Y | 2.20 |

Note: 8. For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

- 1. are intended to implant into the body, or
- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: DGD2005S8-13