



#### 100V NPN LOW VCESAT TRANSISTOR IN PowerDI3333-8

#### **Features**

- BV<sub>CEO</sub> > 100V
- Small Form Factor Thermally Efficient Package.
   Enables Higher Density End Products
- I<sub>C</sub> = 5A High Continuous Collector Current
- I<sub>CM</sub> = 10A Peak Pulse Current
- Low Saturation Voltage V<sub>CE(sat)</sub> < 35mV</li>
- hFE Specified Up to 10A for a High Gain Hold Up
- Complementary PNP Type: DXTP03100CFG
- Wettable Flank for Improved Optical Inspection
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please <u>contact us</u> or your local Diodes representative. <a href="https://www.diodes.com/quality/product-definitions/">https://www.diodes.com/quality/product-definitions/</a>

### **Mechanical Data**

- Case: PowerDI<sup>®</sup>3333-8
- Case Material: Molded Plastic. "Green" Molding Compound UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Solderable per MIL-STD-202, Method 208 (63)
- Weight: 0.03 grams (Approximate)


### **Applications**

- Motor Driving
- Line Switching
- High Side Switches


PowerDI3333-8 (SWP) (Type UX)



Top View



**Bottom View** 



Device Symbol

### **Ordering Information** (Note 4)


			a	- 140 101 ( )	
Part Number	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity Per Reel
DXTN03100CFG-7	Standard	2J6	7	12	2,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

### **Marking Information**

PowerDI3333-8 (SWP) (Type UX)



2J6 = Product Type Marking Code

YYWW = Date Code Marking

YY = Last Two Digits of Year (ex: 21 = 2021)

WW = Week Code (01 to 53)



# **Absolute Maximum Ratings** (@ $T_A = +25^{\circ}C$ , unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	Vcво	120	V
Collector-Emitter Voltage	VCEO	100	V
Emitter-Base Voltage	V <sub>EBO</sub>	7	V
Continuous Collector Current	Ic	5	А
Peak Pulse Current	Ісм	10	А

### Thermal Characteristics (@TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	
Dower Discipation	(Note 5)	D-	1.2	W
Power Dissipation	(Note 6)	P <sub>D</sub>	2.7	W
Thermal Registance, Junction to Ambient	(Note 5)	D	107	°C/W
Thermal Resistance, Junction to Ambient	(Note 6)	− R <sub>θJA</sub>	48	°C/W
Thermal Resistance, Junction to Leads (Note 7	ReJL	8.5	°C/W	
Operating and Storage Temperature Range	TJ, TSTG	-55 to +150	°C	

# ESD Ratings (Note 8)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	≥ 400	V	С


Notes:

- 5. For a device mounted with the collector tab on MRP FR4-PCB; device is measured under still air conditions whilst operating in a steady-state.
- 6. Same as Note 5, except the device is mounted on 25mm x 25mm 2oz copper.
- 7. Thermal resistance from junction to solder-point (at the collector tab).
- 8. Refer to JEDEC specification JESD22-A114 and JESD22-A115.





# **Thermal Characteristics and Derating Information**



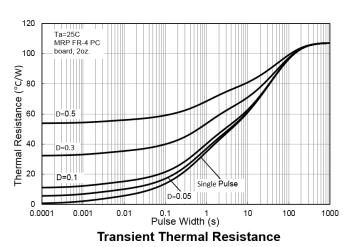

**SOA Safe Operation Area** 

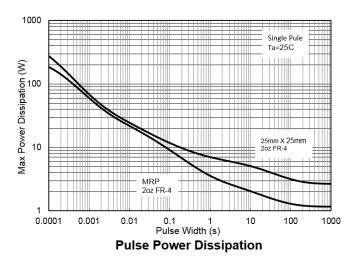





# **Electrical Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	ВУсво	120	269	_	V	Ic = 100μA
Collector-Emitter Breakdown Voltage (Note 9)	BVceo	100	121	_	V	Ic = 10mA
Emitter-Base Breakdown Voltage	$BV_{EBO}$	7	7.9	_	V	I <sub>E</sub> = 100μA
Collector-Base Cut-Off Current	Ісво	_	2	20	nA	V <sub>CB</sub> = 120V
Conector-base out-on current		_	0.07	10	μΑ	V <sub>CB</sub> = 120V, T <sub>A</sub> = +125°C
Collector-Emitter Cut-Off Current	ICER	_	2	20	nA	V <sub>CB</sub> = 100V
Concetor Emitter out on Garrent	R ≤ 1kΩ	_	0.44	10	μΑ	V <sub>CB</sub> = 100V, T <sub>A</sub> = +125°C
Emitter Cut-Off Current	I <sub>EBO</sub>	_	1	20	nA	V <sub>EB</sub> = 6V
		200	459	_	_	Ic = 10mA, VcE = 2V
		200	465	800	-	Ic = 100mA, VcE = 2V
Static Forward Current Transfer Ratio (Note 9)	hfE	200	372	_	-	$I_C = 1A$ , $V_{CE} = 2V$
Static Forward Current Transfer Natio (Note 9)		150	219	_	-	Ic = 1.5A, VcE = 2V
		100	142	_		Ic = 2A, VcE = 2V
			39	_		$I_C = 5A$ , $V_{CE} = 2V$
			17	35	mV	Ic = 100mA, I <sub>B</sub> = 5mA
Collector-Emitter Saturation Voltage (Note 9)	Vor.	_	43	65	mV	Ic = 1A, I <sub>B</sub> = 100mA
Conector-Emitter Saturation Voltage (Note 9)	VCE(sat)		88	125	mV	Ic = 2A, I <sub>B</sub> = 100mA
		_	166	220	mV	$I_C = 5A$ , $I_B = 500mA$
Base-Emitter Saturation Voltage (Note 9)	V <sub>BE(sat)</sub>	_	992	1100	mV	Ic = 5A, I <sub>B</sub> = 500mA
Base-Emitter Turn-On Voltage (Note 9)	V <sub>BE(on)</sub>	_	894	1000	mV	Ic = 5A, VcE = 2V
Input Capacitance	$C_{ibo}$		550	_	pF	V <sub>EB</sub> = 0.5V. f = 1MHz
Output Capacitance	C <sub>obo</sub>		18	_	рF	V <sub>CB</sub> = 10V. f = 1MHz
Transition Frequency	fτ	_	140	_	MHz	$V_{CE} = 10V, I_{C} = 100mA$ f = 50MHz
	t <sub>delay</sub>		16	_	ns	
Switching Time	trise	_	5	_	ns	Vcc = 10V, Ic = 1A
Switching fillie	t <sub>storage</sub>	_	1450	_	ns	$I_{B1} = -I_{B2} = 100 \text{mA}$
	t <sub>fall</sub>	_	87	_	ns	

Note:


9. Measured under pulsed conditions. Pulse width  $\leq$  300 $\mu$ s. Duty cycle  $\leq$  2%.




# Typical Electrical Characteristics (@TA = +25°C, unless otherwise specified.)




# V<sub>CE(sat)</sub> vs I<sub>C</sub>




 $h_{\text{FE}}$  vs  $I_{\text{C}}$ 



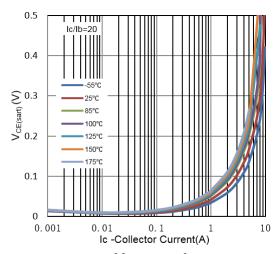

 $V_{\text{CE(sat)}} vs I_{\text{C}}$ 

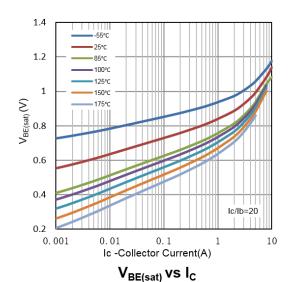


180 160 140 120 1100 100 80 60 60 40 20 0 50 60 Ic (mA) 20 40 100 10 30 80 90 fT v lc



# **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

#### PowerDI3333-8 (SWP) (Type UX)

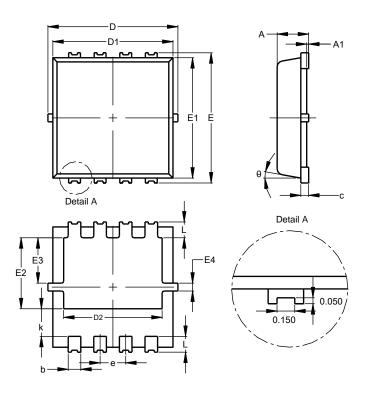


PowerDI3333-8 (SWP)					
(Type UX)					
Dim	Min	Max	Тур		
Α	0.75	0.85	0.80		
A1	0.00	0.05			
b	0.25	0.40	0.32		
С	0.10	0.25	0.15		
D	3.20	3.40	3.30		
D1	2.95	3.15	3.05		
D2	2.30	2.70	2.50		
Е	3.20	3.40	3.30		
E1	2.95	3.15	3.05		
E2	1.60	2.00	1.80		
E3	0.95	1.35	1.15		
E4	0.10	0.30	0.20		
е	_	_	0.65		
k	0.50	0.90	0.70		
L	0.30	0.50	0.40		
θ	0°	12°	10°		
All Dimensions in mm					

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.

#### PowerDI3333-8 (SWP) (Type UX)

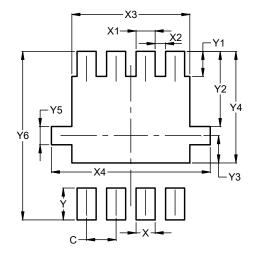

Dimensions	Value (in mm)
С	0.650
X	0.420
X1	0.420
X2	0.230
Х3	2.600
X4	3.500
Y	0.700
Y1	0.550
Y2	1.650
Y3	0.600
Y4	2.450
Y5	0.400
Y6	3.700

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device terminals and PCB tracking.



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

www.diodes.com

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

DXTN03100CFG-7