



Load feeder fuseless, Direct-on-line starting 400 V AC, Size S0 18...25 A 230 V AC screw terminal for 60 mm busbar systems (also fulfills type of coordination 1) Type of coordination 2, I<sub>q</sub> = 150 kA 1 NO+1 NC (contactor)

|                                                                    |                                            |
|--------------------------------------------------------------------|--------------------------------------------|
| product brand name                                                 | SIRIUS                                     |
| product designation                                                | Direct (on-line) starter                   |
| design of the product                                              | for 60 mm busbars                          |
| product type designation                                           | 3RA21                                      |
| manufacturer's article number                                      |                                            |
| • of the supplied contactor                                        | <a href="#">3RT2027-1AP00</a>              |
| • of the supplied circuit-breakers                                 | <a href="#">3RV2021-4DA10</a>              |
| • of the supplied busbar adapter                                   | <a href="#">8US1251-5NT10</a>              |
| • of the supplied link module                                      | <a href="#">3RA2921-1AA00</a>              |
| <b>General technical data</b>                                      |                                            |
| size of the circuit-breaker                                        | S0                                         |
| size of load feeder                                                | S0                                         |
| power loss [W] for rated value of the current                      |                                            |
| • at AC in hot operating state per pole                            | 5.8 W                                      |
| • without load current share typical                               | 9.8 W                                      |
| insulation voltage with degree of pollution 3 at AC rated value    | 690 V                                      |
| surge voltage resistance rated value                               | 6 kV                                       |
| degree of protection NEMA rating                                   | other                                      |
| shock resistance according to IEC 60068-2-27                       | 6g / 11 ms                                 |
| mechanical service life (operating cycles) of contactor typical    | 10 000 000                                 |
| type of assignment                                                 | 2                                          |
| reference code according to IEC 81346-2:2019                       | Q                                          |
| Substance Prohibitance (Date)                                      | 10/01/2009                                 |
| SVHC substance name                                                | Lead titanium zirconium oxide - 12626-81-2 |
| Weight                                                             | 1.289 kg                                   |
| <b>Ambient conditions</b>                                          |                                            |
| ambient temperature                                                |                                            |
| • during operation                                                 | -20 ... +60 °C                             |
| • during storage                                                   | -50 ... +80 °C                             |
| • during transport                                                 | -50 ... +80 °C                             |
| temperature compensation                                           | -20 ... +60 °C                             |
| relative humidity during operation                                 | 10 ... 95 %                                |
| <b>Environmental footprint</b>                                     |                                            |
| Environmental Product Declaration (EPD)                            | Yes                                        |
| global warming potential [CO <sub>2</sub> eq] total                | 92.1 kg                                    |
| global warming potential [CO <sub>2</sub> eq] during manufacturing | 5.27 kg                                    |
| global warming potential [CO <sub>2</sub> eq] during operation     | 87.6 kg                                    |
| global warming potential [CO <sub>2</sub> eq] after end of life    | -0.84 kg                                   |
| <b>Main circuit</b>                                                |                                            |
| number of poles for main current circuit                           | 3                                          |

|                                                                                                                                                                                                                                                                                                                                                                                                                              |                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| <b>design of the switching contact</b>                                                                                                                                                                                                                                                                                                                                                                                       | electromechanical                         |
| <b>adjustable current response value current of the current-dependent overload release</b>                                                                                                                                                                                                                                                                                                                                   | 18 ... 25 A                               |
| <b>operating voltage</b> <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>                                                                                                                                                                                                                                                      | 690 V<br>690 V<br>690 V                   |
| <b>operating frequency rated value</b>                                                                                                                                                                                                                                                                                                                                                                                       | 50 ... 60 Hz                              |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                         | 25 A<br>25 A                              |
| <b>operating power</b> <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                                                                                                                                                                   | 11 000 W<br>11 000 W                      |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                                                                                                                                              |                                           |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                                                                                                                                         | AC                                        |
| <b>control supply voltage at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                                                                                                                                                                                                                                                                                                                 | 230 V                                     |
| <b>apparent holding power of magnet coil at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                                              | 9.8 VA<br>9.8 VA                          |
| <b>inductive power factor with the holding power of the coil</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                                | 0.25<br>0.25                              |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                     |                                           |
| <b>product extension auxiliary switch</b>                                                                                                                                                                                                                                                                                                                                                                                    | Yes                                       |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                                                                                                                   |                                           |
| <b>trip class</b>                                                                                                                                                                                                                                                                                                                                                                                                            | CLASS 10                                  |
| <b>design of the overload release</b>                                                                                                                                                                                                                                                                                                                                                                                        | thermal (bimetallic)                      |
| <b>response value current of instantaneous short-circuit trip unit</b>                                                                                                                                                                                                                                                                                                                                                       | 325 A                                     |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                        |                                           |
| <b>full-load current (FLA) for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                 | 25 A<br>25 A                              |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> </ul> </li> </ul> | 2 hp<br>3 hp<br>7.5 hp<br>7.5 hp<br>20 hp |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                              |                                           |
| <b>product function short circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                             | Yes                                       |
| <b>design of the short-circuit trip</b>                                                                                                                                                                                                                                                                                                                                                                                      | magnetic                                  |
| <b>conditional short-circuit current (I<sub>q</sub>)</b> <ul style="list-style-type: none"> <li>• at 400 V according to IEC 60947-4-1 rated value</li> </ul>                                                                                                                                                                                                                                                                 | 150 000 A                                 |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                    |                                           |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                     | vertical                                  |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                      | for snapping onto 60 mm busbar systems    |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                | 260 mm                                    |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                 | 45 mm                                     |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                 | 155 mm                                    |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts</li> </ul>                                                                                                                                                   | 20 mm<br>0 mm<br>50 mm<br>20 mm<br>10 mm  |

|               |       |
|---------------|-------|
| — forwards    | 20 mm |
| — backwards   | 0 mm  |
| — upwards     | 50 mm |
| — downwards   | 10 mm |
| — at the side | 20 mm |

#### Connections/ Terminals

##### type of electrical connection

|                                     |                      |
|-------------------------------------|----------------------|
| • for main current circuit          | screw-type terminals |
| • for auxiliary and control circuit | screw-type terminals |

#### Safety related data

|                                               |     |
|-----------------------------------------------|-----|
| product function suitable for safety function | Yes |
|-----------------------------------------------|-----|

##### Electrical Safety

|                                                      |                                                  |
|------------------------------------------------------|--------------------------------------------------|
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
|------------------------------------------------------|--------------------------------------------------|

#### Communication/ Protocol

##### protocol is supported

|                        |    |
|------------------------|----|
| • PROFINET IO protocol | No |
| • PROFIsafe protocol   | No |

|                                             |    |
|---------------------------------------------|----|
| protocol is supported AS-Interface protocol | No |
|---------------------------------------------|----|

#### Approvals Certificates

##### General Product Approval

For use in hazardous locations



[Confirmation](#)



#### Test Certificates

#### Marine / Shipping

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



#### Marine / Shipping

#### other

#### Railway

#### Environment



[Confirmation](#)

[Special Test Certificate](#)



#### Environment

[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2120-4DD27-0AP0>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2120-4DD27-0AP0>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2120-4DD27-0AP0>



##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2120-4DD27-0AP0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2120-4DD27-0AP0&lang=en)

##### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2120-4DD27-0AP0/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

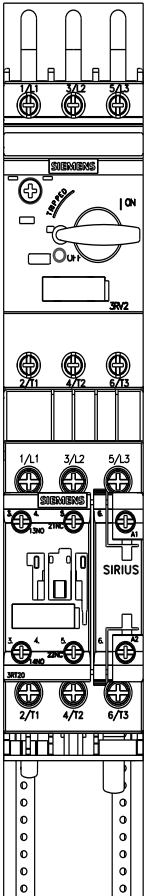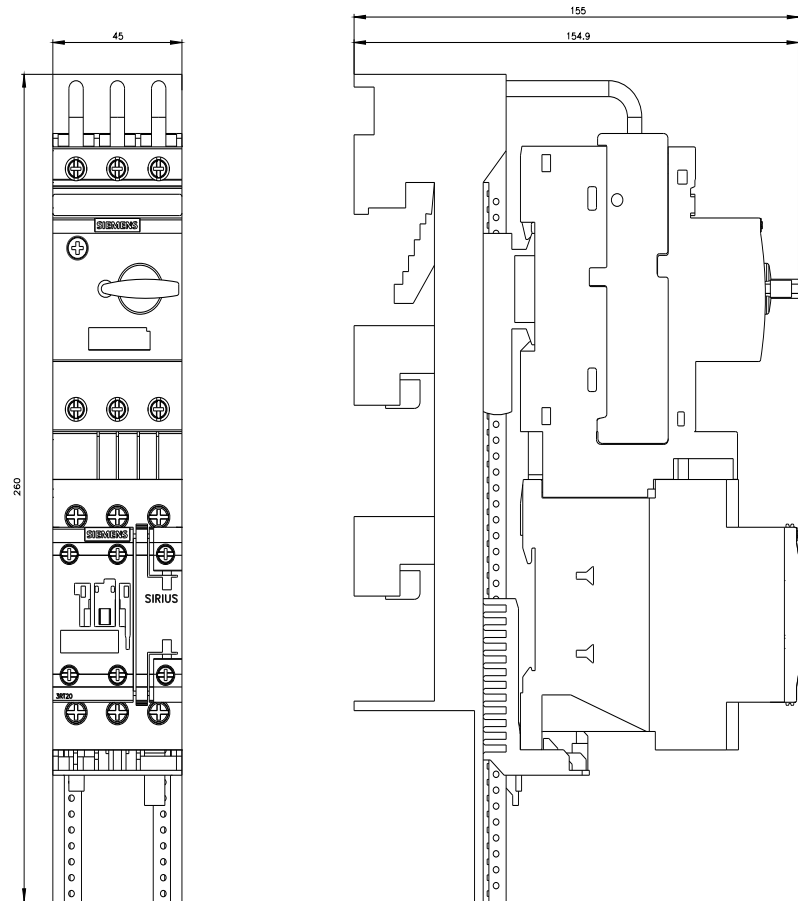



last modified:

6/5/2024 

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RA21204DD270AP0](#)