SIEMENS

Data sheet 3RT2026-1AG60



power contactor, AC-3e/AC-3, 25 A, 11 kW / 400 V, 3-pole, 100 V AC, 50 Hz / 100-110 V, 60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S0

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	5.7 W
 at AC in hot operating state per pole 	1.9 W
without load current share typical	2.7 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
 of main circuit rated value 	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Weight	0.415 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Environmental footprint	
Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] total	74.2 kg
Global Warming Potential [CO2 eq] during manufacturing	1.9 kg
Global Warming Potential [CO2 eq] during operation	72.4 kg
Global Warming Potential [CO2 eq] after end of life	-0.117 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value at AC-1 	40 A
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	40 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	35 A
• at AC-3	
— at 400 V rated value	25 A
— at 500 V rated value	18 A
— at 690 V rated value • at AC-3e	13 A
— at 400 V rated value	25 A
— at 500 V rated value	18 A
— at 690 V rated value	13 A
at AC-4 at 400 V rated value	15.5 A
at AC-5a up to 690 V rated value	35.2 A
at AC-5b up to 400 V rated value	20.7 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	20.2 A
— up to 400 V for current peak value n=20 rated value	20.2 A
— up to 500 V for current peak value n=20 rated value	20.2 A
— up to 690 V for current peak value n=20 rated value	12.9 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	13.5 A
— up to 400 V for current peak value n=30 rated value	13.5 A
— up to 500 V for current peak value n=30 rated value	13.5 A
— up to 690 V for current peak value n=30 rated value	13 A
minimum cross-section in main circuit at maximum AC-1 rated value	10 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	9 A
at 690 V rated value	9 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 60 V rated value	20 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A

 with 3 current paths in series at DC-1 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 60 V rated value	5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.06 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	35 A
— at 60 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
• at AC-3	
— at 230 V rated value	5.5 kW
— at 400 V rated value — at 500 V rated value	11 kW 11 kW
— at 500 V rated value — at 690 V rated value	11 kW
• at AC-3e	11 NVV
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	11 kW
— at 690 V rated value	11 kW
operating power for approx. 200000 operating cycles at AC-	
4	4.411
at 400 V rated valueat 690 V rated value	4.4 kW 7.7 kW
operating apparent power at AC-6a	1.1 NVV
• up to 230 V for current peak value n=20 rated value	8 kVA
up to 400 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value	13.9 kVA
up to 500 V for current peak value n=20 rated value	17.4 kVA
• up to 690 V for current peak value n=20 rated value	15.4 kVA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	5.3 kVA
• up to 400 V for current peak value n=30 rated value	9.3 kVA
• up to 500 V for current peak value n=30 rated value	11.6 kVA
• up to 690 V for current peak value n=30 rated value	15.5 kVA
short-time with stand current in cold operating state up to 40 $^{\circ}\text{C}$	
 limited to 1 s switching at zero current maximum 	375 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	300 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	210 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	144 A; Use minimum cross-section acc. to AC-1 rated value
Ilimited to 60 s switching at zero current maximum	118 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	5 000 1/b
• at AC	5 000 1/h

System of voltage of the control supply voltage at AC		
e at AC-2 maximum	operating frequency	
** at AC-3 maximum	• at AC-1 maximum	1 000 1/h
** ALA-C-3 maximum	• at AC-2 maximum	750 1/h
### AC-4 maximum ### Type of voltage of the control supply voltage ### AC-4 maximum ### Type of voltage of the control supply voltage ### AC-4 maximum	• at AC-3 maximum	750 1/h
Type of voltage of the control supply voltage at AC a t sto ltz rated value 110 V operating range factor control supply voltage rated value of magnet coil at AC a t sto ltz rated value 0.8 1.1 a t sto ltz rated value 0.8 1.1 apparent pick-up power of magnet coil at AC a t sto ltz 3	• at AC-3e maximum	750 1/h
System of voltage of the control supply voltage at AC	at AC-4 maximum	250 1/h
control supply voltage at AC at 80 1br zraded value 100 V at 80 1br zraded value 100 V at 80 1br zraded value 110 V operating range factor control supply voltage rated value of agent coil at 50 1bz 0.81.1 at 50 1bz 0.81.1 at 80 1bz 150 1bz at 80 1bz 150 1bz at 80 1bz 79 VA inductive power factor with closing power of the coil 0.72 at 80 1bz 0.72 at 80 1bz 0.74 at 80 1bz 0.74 at 80 1bz 10.5 VA at 80 1bz 10.5 VA at 80 1bz 8.5 VA apparent holding power of magnet coil at AC 8.5 VA at 80 1bz 8.5 VA apparent holding power of magnet coil at AC 8.5 VA al 80 1bz 0.25 at 80 1bz 0.25 at 80 1bz 0.28 closing delay 0.28 at AC 4.16 ms operational current at AC-12 10.10 ms control version of the switch operating mechanism	Control circuit/ Control	
* at 50 Hz rated value	type of voltage of the control supply voltage	AC
• at 60 Hz rated value 10 V operating range factor control supply voltage rated value of genet coil at AC 0.8 1.1 • at 50 Hz 0.8 1.1 • at 50 Hz 0.8 1.1 • at 50 Hz 10 VA • at 50 Hz 19 VA • at 50 Hz 0.72 • at 60 Hz 0.72 • at 80 Hz 0.74 • at maximum rated control supply voltage at AC 1.05 VA • at maximum rated control supply voltage at AC 1.05 VA • at 50 Hz 8.5 VA apparent holding power of magnet coil at AC 1.05 VA • at 60 Hz 0.25 at 50 Hz 8.5 VA apparent holding power of magnet coil at AC 1.05 VA • at 50 Hz 0.25 • at 50 Hz 0.28 • at 60 Hz 0.28 closing delay • at AC • at AC 4 16 ms • at AC 4 16 ms • at AC 4 16 ms • at Cool cordacts for auxiliary cordacts instantaneous cortact 1 corticity yellow cortect value <t< td=""><td>control supply voltage at AC</td><td></td></t<>	control supply voltage at AC	
operating range factor control supply voltage rated value of magnet coil at AC	at 50 Hz rated value	
magnet coil at AC	at 60 Hz rated value	110 V
* at 50 Hz		
• a1 60 Hz 0,85 1.1 apparent pick-up power of magnet coil at AC 81 VA • a1 60 Hz 78 VA • at 60 Hz 78 VA • at 60 Hz 0.72 • at 60 Hz 0.74 • at 60 Hz 0.74 • at minimum rated control supply voltage at AC - at 60 Hz • at maximum rated control supply voltage at AC 10.5 VA • at 60 Hz 8.5 VA apparent holding power of magnet coil at AC 10.5 VA • at 60 Hz 10.5 VA • at 60 Hz 0.25 • at 60 Hz 0.25 • at 60 Hz 8.5 VA • at 60 Hz 0.25 • at 60 Hz 8.5 VA • at 60 Hz 10.5 VA • at 60 Hz 0.25 • at 60 Hz 10.5 VA • at 60 Hz 10.		0.9 1.1
apparent pick-up power of magnet coil at AC		
• at 50 Hz		0.05 1.1
• at 60 Hz		Q1 \/A
Inductive power factor with closing power of the coil a 160 Hz 0.72 0.72 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.74 0.75 0.		
• at 50 Hz • at 60 Hz apparent holding power • at minimum rated control supply voltage at AC — at 60 Hz • at maximum rated control supply voltage at AC — at 60 Hz • at maximum rated control supply voltage at AC — at 60 Hz • at 840 ms opening delay • at AC • at16 ms arcing time control version of the switch operating mechanism Standard A1 - A2 xurtilary circust number of NC contacts for auxiliary contacts instantaneous contact contact operational current at AC-12 maximum operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 600 V rated value • at 40 V rated value • at 600 V ra		13 VA
• at 160 Hz 0.74 apparent holding power		0.72
a th minimum rated control supply voltage at AC		
• at minimum rated control supply voltage at AC — at 60 Hz • at maximum rated control supply voltage at AC — at 60 Hz • at 60 Hz • at 50 Hz • at 60 Hz • at AC • au 16 ms control version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact contact operational current at AC-12 maximum operational current at AC-12 maximum operational current at AC-15 maximum at 400 V rated value • at 400 V rated value • at 600 V rate		0.74
- at 60 Hz • at maximum rated control supply voltage at AC — at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 70 Hz • at 80 H		
	,	10.5 VA
### ### ### ### ### ### ### ### ### ##		10.5 VA
a parent holding power of magnet coil at AC		8.5.VΔ
• at 50 Hz • at 60 Hz • at AC • 840 ms opening delay • at AC • at AC • arcing time • at AC • arcing time • ontrol version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact contact contact contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 690 V rated value • at 600 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value • at 41 10 V rated value • at 41 10 V rated value • at 41 25 V rated value • at 42 V rated value • at 41 20 V rated value • at 41 10 V rated value • at 60 V		0.0 V//
inductive power factor with the holding power of the coil • at 50 Hz		10.5 VA
inductive power factor with the holding power of the coil at 150 Hz at 150 Hz at 160 Hz below the colors of the coil at 160 Hz below the colors of the coil at 160 Hz below the colors of the coil at 160 Hz below the colors of the coil at 160 Hz below the coil at 160 Hz be		
• at 50 Hz • at 60 Hz • at AC opening delay • at AC arcing time control version of the switch operating mechanism number of NC contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 690 V rated value • at 690 V rated value • at 69 V rated value • at 69 V rated value • at 60		0.0 7/1
e at 60 Hz closing delay e at AC		0.25
● at AC 8 40 ms opening delay ● at AC 4 16 ms arcing time 10 10 ms control version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum 10 A operational current at AC-15 10 A 3 A 4 1 6 90 V rated value 1 A 6 1 5		
● at AC 8 40 ms opening delay ● at AC 4 16 ms arcing time 10 10 ms control version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum 10 A operational current at AC-15 10 A 3 A 4 1 6 90 V rated value 1 A 6 1 5	closing delay	
aring time control version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous 1 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 1 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 at 230 V rated value 3A 4 at 400 V rated value 10 A at 480 V rated value 10 A at 48 V rated value 3A 4 at 410 V rated value 3A 4 at 110 V rated value 3A 4 at 125 V rated value 1A 4 at 220 V rated value 1A 4 at 220 V rated value 1A 4 at 220 V rated value 1A 4 at 600 V rated value 1A 4 at 600 V rated value 1A 4 at 600 V rated value 1A 4 at 220 V rated value 1A 4		8 40 ms
aring time control version of the switch operating mechanism Standard A1 - A2 Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous 1 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 1 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 number of NC contacts for auxiliary contacts instantaneous 2 at 230 V rated value 3A 4 at 400 V rated value 10 A at 480 V rated value 10 A at 48 V rated value 3A 4 at 410 V rated value 3A 4 at 110 V rated value 3A 4 at 125 V rated value 1A 4 at 220 V rated value 1A 4 at 220 V rated value 1A 4 at 220 V rated value 1A 4 at 600 V rated value 1A 4 at 600 V rated value 1A 4 at 600 V rated value 1A 4 at 220 V rated value 1A 4	opening delay	
Control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 220 V rated value • at 120 V rated value • at 220 V rated value	• at AC	4 16 ms
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value 10 A operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value • at 120 V rated value • at 220 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 600 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 20 V rated value • at 20 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 24 V rated value	arcing time	10 10 ms
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum 10 A operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 4 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 10 V rated value • at 10 V rated value • at 20 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 10 V rated value • at 20 V rated value	control version of the switch operating mechanism	Standard A1 - A2
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum 10 A operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 10 V rated value • at 25 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 10 V rated value • at 10 V rated value • at 20 V rated value	Auxiliary circuit	
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 24 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 20 V rated value • at 20 V rated value • at 600 V rated value • at 20 V rated value	number of NC contacts for auxiliary contacts instantaneous	1
contact operational current at AC-12 maximum 10 A operational current at AC-15 - at 230 V rated value • at 230 V rated value 3 A • at 500 V rated value 2 A • at 690 V rated value 1 A operational current at DC-12 - at 24 V rated value • at 24 V rated value 6 A • at 60 V rated value 6 A • at 110 V rated value 3 A • at 125 V rated value 2 A • at 220 V rated value 1 A • at 600 V rated value 1 A • at 600 V rated value 1 A • at 600 V rated value 1 A • at 220 V rated value 1 A • at 24 V rated value 0.15 A		
operational current at AC-15 • at 230 V rated value 10 A • at 400 V rated value 3 A • at 500 V rated value 1 A operational current at DC-12 10 A • at 24 V rated value 6 A • at 48 V rated value 6 A • at 110 V rated value 3 A • at 125 V rated value 2 A • at 220 V rated value 1 A • at 600 V rated value 0.15 A operational current at DC-13 0.15 A oat 24 V rated value 10 A		1
 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value at 690 V rated value at 24 V rated value at 24 V rated value at 80 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 20 V rated value at 600 V rated value at 20 V rated value at 220 V rated value at 24 V rated value 	operational current at AC-12 maximum	10 A
 at 400 V rated value at 500 V rated value at 690 V rated value 1 A operational current at DC-12 at 24 V rated value 10 A at 48 V rated value 6 A at 60 V rated value 6 A at 110 V rated value 3 A at 125 V rated value 2 A at 220 V rated value 1 A at 600 V rated value 0.15 A operational current at DC-13 0.15 A at 24 V rated value 10 A	operational current at AC-15	
 at 500 V rated value at 690 V rated value 1 A operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 24 V rated value 	• at 230 V rated value	10 A
● at 690 V rated value operational current at DC-12 ● at 24 V rated value ● at 48 V rated value ● at 60 V rated value ● at 60 V rated value ● at 110 V rated value ● at 125 V rated value ● at 220 V rated value ● at 600 V rated value 0.15 A operational current at DC-13 ● at 24 V rated value 10 A	• at 400 V rated value	3 A
operational current at DC-12 • at 24 V rated value 10 A • at 48 V rated value 6 A • at 60 V rated value 3 A • at 110 V rated value 2 A • at 220 V rated value 1 A • at 600 V rated value 0.15 A operational current at DC-13 10 A	• at 500 V rated value	2 A
 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 24 V rated value 	at 690 V rated value	1 A
 at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value at 220 V rated value at 220 V rated value at 220 V rated value 1 A at 220 V rated value 10 A 	operational current at DC-12	
 at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value 10 A 	• at 24 V rated value	10 A
 at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value 10 A 	• at 48 V rated value	6 A
 at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value 10 A 	• at 60 V rated value	6 A
● at 220 V rated value ● at 600 V rated value 0.15 A operational current at DC-13 ● at 24 V rated value 10 A	• at 110 V rated value	3 A
● at 600 V rated value 0.15 A operational current at DC-13 10 A	• at 125 V rated value	2 A
operational current at DC-13 • at 24 V rated value 10 A	• at 220 V rated value	1 A
• at 24 V rated value 10 A	at 600 V rated value	0.15 A
	operational current at DC-13	
	• at 24 V rated value	10 A
at 48 v rated value 2 A	• at 48 V rated value	2 A
• at 60 V rated value 2 A	• at 60 V rated value	2 A

• at 110 V rated value	1A
at 125 V rated value	0.9 A
at 220 V rated value	0.3 A
at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
 at 480 V rated value 	21 A
at 600 V rated value	22 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	2 hp
— at 230 V rated value	3 hp
 for 3-phase AC motor 	
— at 200/208 V rated value	5 hp
— at 220/230 V rated value	7.5 hp
— at 460/480 V rated value	15 hp
— at 575/600 V rated value	20 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
 — with type of coordination 1 required 	gG: 100 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 100 A (415 V, 80 kA)
 — with type of assignment 2 required 	gG: 35A (690V, 100kA), aM: 20A (690V, 100kA), BS88: 35A (415V, 80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	85 mm
height width	85 mm 45 mm
width depth required spacing	45 mm
width depth	45 mm 97 mm
width depth required spacing • with side-by-side mounting — forwards	45 mm 97 mm
width depth required spacing • with side-by-side mounting — forwards — upwards	45 mm 97 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards	45 mm 97 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side	45 mm 97 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts	45 mm 97 mm 10 mm 10 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards	45 mm 97 mm 10 mm 10 mm 0 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • at the side • at the side • at the side — at the side	45 mm 97 mm 10 mm 10 mm 0 mm 0 mm 10 mm 10 mm 6 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side - downwards — downwards — downwards	45 mm 97 mm 10 mm 10 mm 0 mm 0 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • downwards — at the side — downwards — at the side — downwards • for live parts	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — downwards — at the side — forwards — upwards — at the side — downwards • for live parts — forwards — upwards	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — upwards — downwards • for live parts — forwards — upwards — downwards	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards — at the side	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — downwards — at the side	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — upwards — at the side Connections/ Terminals type of electrical connection	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards • for live parts — forwards — upwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit	97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm 6 mm 10 mm 10 mm 5 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 5 mm 10 mm 5 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm 6 mm 10 mm 10 mm 5 mm
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections	45 mm 97 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 5 mm 10 mm 5 mm
width depth required spacing with side-by-side mounting forwards upwards downwards at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards at the side downwards for live parts forwards upwards for aupwards downwards for authe side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts	45 mm 97 mm 10 mm Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals
width depth required spacing with side-by-side mounting forwards upwards downwards at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards at the side downwards for live parts forwards upwards for aupwards at the side connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid	45 mm 97 mm 10 mm Screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals
width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side — downwards • for live parts — forwards — upwards — at the side Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections • for main contacts	45 mm 97 mm 10 mm Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals

for AWG cables for main contacts	2x (16 12), 2x (14 8)
connectable conductor cross-section for main contacts	
• solid	1 10 mm²
stranded	1 10 mm²
 finely stranded with core end processing 	1 10 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	
 for main contacts 	16 8
 for auxiliary contacts 	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	
General Product Approval	

General Product Approval













<u>KC</u>

General Product Ap-

EMV

Test Certificates

Marine / Shipping





Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report





Marine / Shipping









Miscellaneous

other

Confirmation

other Railway Environment

<u>Confirmation</u> <u>Special Test Certificate</u>



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2026-1AG60

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2026-1AG60

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2026-1AG60

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


<u> http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2026-1AG60&lang=er</u>


Characteristic: Tripping characteristics, I^2t , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2026-1AG60/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2026-1AG60&objecttype=14&gridview=view1







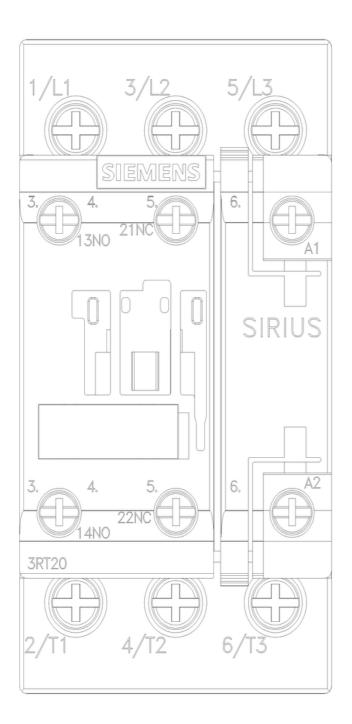

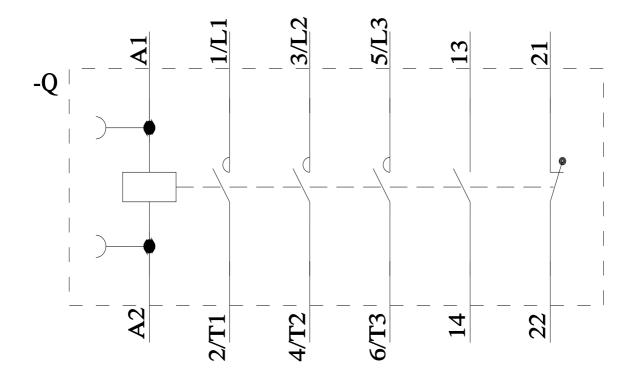

last modified: 7/19/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RT20261AG60