SIEMENS

Data sheet

3TC4417-0LF4



Contactor, Size 2, 2-pole, for railway applications DC-3 and 5, 7.5 A at 750 V 110V DC Auxiliary contacts 21 (2NO+1NC) with varistor and series resistor Operating range 0.7...1.25xUS


product designation	Contactor
product type designation	3TC
General technical data	
size of contactor	2
product extension	
 function module for communication 	No
auxiliary switch	No
insulation voltage rated value	800 V
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	300 V
shock resistance at rectangular impulse	
• at DC	7,5g / 5 ms, 3,4g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/01/2012
Ambient conditions	
ambient temperature	
 during operation 	-40 +70 °C
during storage	-50 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles	2
number of poles for main current circuit	2
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
type of voltage	DC
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	32 A
— at 110 V rated value	32 A
— at 220 V rated value	32 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	32 A
— at 110 V rated value	32 A
— at 220 V rated value	32 A
— at 440 V rated value	32 A
— at 600 V rated value	32 A


— at 750 V rated value	32 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	32 A
— at 110 V rated value	32 A
— at 220 V rated value	32 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	32 A
— at 110 V rated value	32 A
— at 220 V rated value	32 A
— at 440 V rated value	29 A
— at 600 V rated value	21 A
— at 750 V rated value	7.5 A
operating power	
• at DC-1	
— at 110 V rated value	3.5 kW
— at 220 V rated value	7 kW
— at 440 V rated value	14 kW
— at 750 V rated value	24 kW
• at DC-3 at DC-5	
— at 110 V rated value	2.5 kW
— at 220 V rated value	5 kW
— at 440 V rated value	9 kW
— at 600 V rated value	9 kW
— at 750 V rated value	4 kW
operating frequency	
• at DC-1 maximum	1 500 1/h
• at DC-3 maximum	750 1/h
• at DC-5 maximum	750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC	
	110 V
rated value	
rated value design of the surge suppressor	with varistor
rated value design of the surge suppressor closing power of magnet coil at DC	with varistor 48 W
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC	with varistor 48 W 13 W
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC	with varistor 48 W 13 W 35 190 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC	with varistor 48 W 13 W 35 190 ms 10 25 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time	with varistor 48 W 13 W 35 190 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts e instantaneous contact number of NO contacts for auxiliary contacts	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts e instantaneous contact number of NO contacts for auxiliary contacts e instantaneous contact number of CO contacts for auxiliary contacts	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 0
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts e instantaneous contact number of NO contacts for auxiliary contacts e instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 3
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 0
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 1 2 1 1 2 1 1 2 1
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts operational current at AC-12 maximum operational current at AC-15 at 230 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 5.6 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 3 5.6 A 3.6 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 5.6 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 500 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 2 2 3.6 A 2.5 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 24 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 36 A 3.6 A 2.5 A 10 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 500 V rated value at 500 V rated value at 24 V rated value at 24 V rated value at 24 V rated value at 48 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 2 1 2 1 2 2 1 2 2 1 2 2 2 36 A 2.5 A 10 A 10 A 10 A 10 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 400 V rated value at 400 V rated value at 24 V rated value at 24 V rated value at 48 V rated value at 48 V rated value at 400 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 2 1 2 1 2 1 2 2 1 2 2 2 1 2 2 10 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 400 V rated value at 400 V rated value at 48 V rated value at 48 V rated value at 400 V rated value at 400 V rated value at 400 V rated value at 4110 V rated value 	with variator 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 1 5.6 A 3.6 A 2.5 A 10 A 10 A 10 A 3.6 A 2.5 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value 	with variator 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 10 A 2.5 A
 rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 maximum operational current at AC-15 at 230 V rated value at 400 V rated value at 400 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value 	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 2 2 2 10 A 5.6 A 3.6 A 2.5 A 10 A 10 A 3.2 A 2.5 A 0.9 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of VO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 at 230 V rated value at 400 V rated value at 500 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 220 V rated value at 600 V rated value	with variator 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 10 A 2.5 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact at 230 V rated value at 400 V rated value at 100 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value <l< td=""><td>with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 2 1 2 2 1 2 2 2 1 2 2 2 10 A 5.6 A 3.6 A 2.5 A 10 A 10 A 10 A 10 A 2.5 A 10 A 10 A 10 A 10 A 2.5 A</td></l<>	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 2 1 2 2 1 2 2 2 1 2 2 2 10 A 5.6 A 3.6 A 2.5 A 10 A 10 A 10 A 10 A 2.5 A 10 A 10 A 10 A 10 A 2.5 A
rated value design of the surge suppressor closing power of magnet coil at DC holding power of magnet coil at DC closing delay at DC opening delay at DC arcing time Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts instantaneous contact number of VO contacts for auxiliary contacts instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements operational current at AC-12 at 230 V rated value at 400 V rated value at 500 V rated value at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 220 V rated value at 220 V rated value at 600 V rated value	with varistor 48 W 13 W 35 190 ms 10 25 ms 20 30 ms 2 1 2 1 2 1 2 1 2 1 2 2 1 2 2 1 2 2 1 2 2 2 10 A 5.6 A 3.6 A 2.5 A 10 A 10 A 3.2 A 2.5 A 0.9 A


• at 60 V rated value	5 A				
• at 110 V rated value	1.14 A				
• at 125 V rated value	0.98 A				
• at 220 V rated value	0.48 A				
at 600 V rated value	0.07 A				
IL/CSA ratings	4000 / 2000	_			
contact rating of auxiliary contacts according to UL	A600 / P600				
hort-circuit protection					
design of the fuse link					
for short-circuit protection of the main circuit					
— with type of coordination 1 required	2 x 3NA3020 (50 A) in series (750 V, 3 kA)				
— with type of assignment 2 required	2 x 3NA3020 (50 A) in series (750 V, 3 kA)				
for short-circuit protection of the auxiliary switch required	gG: 16 A (500 V, 1 kA)				
nstallation/ mounting/ dimensions					
mounting position	+/-22,5° rotation possible on vertical mounting surface; c and backward by +/- 22.5° on vertical mounting surface; mounting surface				
fastening method	screw and snap-on mounting onto 35 mm DIN rail accord	ding to DIN EN 50022			
 side-by-side mounting 	Yes				
height	115 mm				
width	82 mm				
depth	145 mm				
required spacing					
 with side-by-side mounting 					
— forwards	15 mm				
— backwards	0 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	10 mm				
 for grounded parts 					
— forwards	30 mm				
— backwards	0 mm				
— upwards	10 mm				
— at the side	10 mm				
— downwards	10 mm				
 for live parts 					
— forwards	30 mm				
— backwards	0 mm				
— upwards	10 mm				
— downwards	10 mm				
— at the side	10 mm				
onnections/ Terminals					
type of electrical connection	screw-type terminals				
for main current circuit	screw-type terminals				
 for auxiliary and control circuit 	screw-type terminals				
type of connectable conductor cross-sections for main contacts					
solid or stranded	2x (2,5 10 mm²)				
 finely stranded with core end processing 	2x (1.5 4 mm²)				
type of connectable conductor cross-sections					
 for auxiliary contacts 					
— solid or stranded	2x (1 2.5 mm²)				
- finely stranded with core end processing	2x (0.75 1.5 mm²)				
afety related data					
product function mirror contact according to IEC 60947-4-1	Yes; One NC contact each must be connected in series auxiliary switch block respectively	for the right and left			
protection class IP on the front according to IEC 60529	IP00				
ertificates/ approvals					
General Product Approval		Functional Safety/Safety of M chinery			

SEA CEA		<u>Confirmation</u>	U	EAC	<u>Type Examination Cer-</u> <u>tificate</u>			
Functional Safety/Safety of Ma- chinery	Declaration of Conformi	ty	Test Certificates					
Type Examination Cer- tificate	UK CA	CE EG-Konf.	Special Test Certific- ate	<u>Miscellaneous</u>	Type Test Certific- ates/Test Report			
other	Dangerous Good							
<u>Confirmation</u>	Transport Information							
Further information								
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).								
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadconter (Catalogs, Brochures,)								
Information- and Downloadcenter (Catalogs, Brochures,) <u>https://www.siemens.com/ic10</u>								
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4417-0LF4								
Cax online generator http://support.automatio	Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4417-0LF4							
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3TC4417-0LF4								
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4417-0LF4⟨=en								
Characteristic: Tripping characteristics, I ² t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3TC4417-0LF4/char								

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4417-0LF4&objecttype=14&gridview=view1

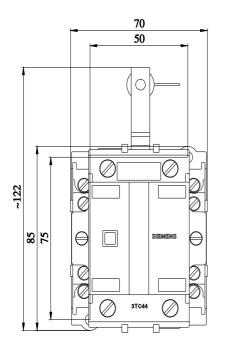

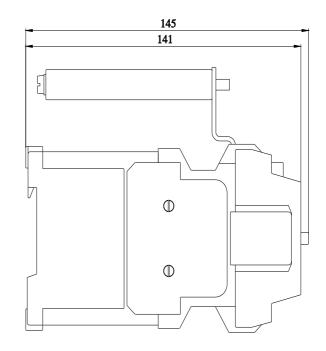

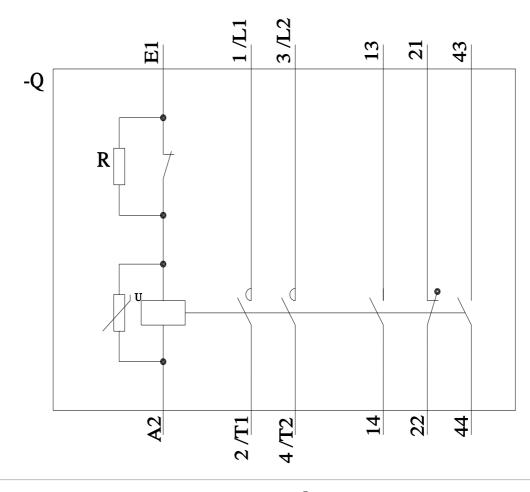

last modified:

2/13/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3TC44170LF4