

LINEAR SYSTEMS

Over 30 Years of Quality Through Innovation

FEATURES

Improved Replacement for SILICONIX, FAIRCHILD, & NATIONAL: 2N5911 & 2N5912

LOW NOISE (10kHz) $e_n \sim 4nV/\sqrt{Hz}$

HIGH TRANSCONDUCTANCE (100MHz) $g_{fs} \geq 4000\mu S$

ABSOLUTE MAXIMUM RATINGS¹

@ 25 °C (unless otherwise stated)

Maximum Temperatures

Storage Temperature -55 to +150 °C

Operating Junction Temperature -55 to +150 °C

Maximum Power Dissipation

Continuous Power Dissipation (Total)⁴ 500mW

Maximum Currents

Gate Current 50mA


Maximum Voltages

Gate to Drain -25V

Gate to Source -25V

LS5911 LS5912 LS5912C

IMPROVED LOW NOISE WIDEBAND
MONOLITHIC DUAL N-CHANNEL
JFET AMPLIFIER

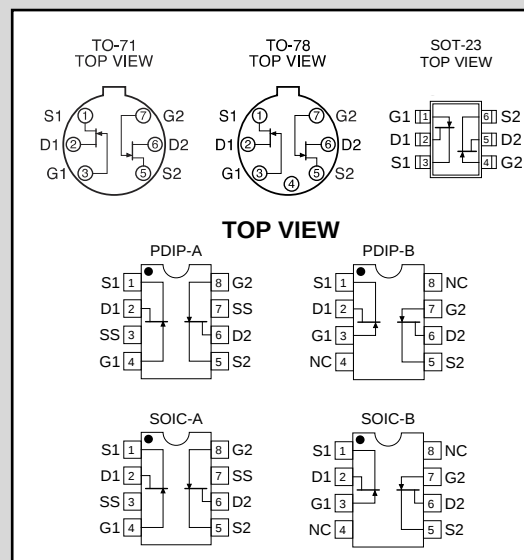

MATCHING ELECTRICAL CHARACTERISTICS @25 °C (unless otherwise stated)

SYMBOL	CHARACTERISTIC	TYP	LS5911		LS5912		LS5912C		UNIT	CONDITIONS
			MIN	MAX	MIN	MAX	MIN	MAX		
$ V_{GS1} - V_{GS2} $	Differential Gate to Source Cutoff Voltage			10		15		40	mV	$V_{DG} = 10V, I_D = 5mA$
$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	Differential Gate to Source Voltage Change with Temperature			20		40		40	$\mu V/^\circ C$	$V_{DG} = 10V, I_D = 5mA$ $T_A = -55 \text{ to } +125^\circ C$
$\frac{I_{DSS1}}{I_{DSS2}}$	Saturation Drain Current Ratio		0.95	1	0.95	1	0.95	1		$V_{DS} = 10V, V_{GS} = 0V$ Notes 2, 3
$ I_{G1} - I_{G2} $	Differential Gate Current			20		20		20	nA	$V_{DG} = 10V, I_D = 5mA$ $T_A = +125^\circ C$
$\frac{g_{fs1}}{g_{fs2}}$	Forward Transconductance Ratio		0.95	1	0.95	1	0.95	1		$V_{DS} = 10V, I_D = 5mA$ $f = 1kHz^3$
CMRR	Common Mode Rejection Ratio	85							dB	$V_{DG} = 5V \text{ to } 10V$ $I_D = 5mA$

STATIC ELECTRICAL CHARACTERISTICS @25 °C (unless otherwise stated)


SYM.	CHARACTERISTIC	TYP	LS5911		LS5912		LS5912C		UNIT	CONDITIONS
			MIN	MAX	MIN	MAX	MIN	MAX		
BV_{GSS}	Gate to Source Breakdown		-25		-25		-25		V	$I_G = -1\mu A, V_{DS} = 0V$
$V_{GS(off)}$	Gate to Source Cutoff Voltage		-1	-5	-1	-5	-1	-5		$V_{DS} = 10V, I_D = 1nA$
$V_{GS(F)}$	Gate to Source Forward Voltage	0.7								$I_G = 1mA, V_{DS} = 0V$
V_{GS}	Gate to Source Voltage		-0.3	-4	-0.3	-4	-0.3	-4		$V_{DG} = 10V, I_G = 5mA$
I_{DSS}	Drain to Source Saturation		7	40	7	40	7	40	mA	$V_{DS} = 10V, V_{GS} = 0V$
I_{GSS}	Gate Leakage Current	-1		-50		-50		-50	pA	$V_{GS} = -15V, V_{DS} = 0V$
I_G	Gate Operating Current	-1		-50		-50		-50		$V_{DG} = 10V, I_D = 5mA$
I_{G1G2}	Gate to Gate Isolation Current			± 1		± 1		± 1	uA	$V_{G1} - V_{G2} = \pm 25V, I_D = I_S = 0$

Linear Integrated Systems


DYNAMIC ELECTRICAL CHARACTERISTICS @25 °C (unless otherwise stated)

SYM.	CHARACTERISTIC	TYP	LS5911		LS5912		LS5912C		UNIT	CONDITIONS
			MIN	MAX	MIN	MAX	MIN	MAX		
g_{fs}	Forward Transconductance	$f = 1\text{kHz}$	4000	10000	4000	10000	4000	10000	μS	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$
		$f = 100\text{MHz}$	7000							
g_{os}	Output Conductance	$f = 1\text{kHz}$		100		100		100	μS	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$
		$f = 100\text{MHz}$	120							
C_{iss}	Input Capacitance			5		5		5	pF	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$ $f = 1\text{MHz}$
C_{rss}	Reverse Transfer Capacitance			1.2		1.2		1.2		
NF	Noise Figure			1		1		1	dB	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$ $f = 10\text{kHz}, R_G = 100\text{K}\Omega$
e_n	Equivalent Input Noise Voltage	$f = 100\text{Hz}$	7	20	20	20	20	20	$\text{nV}/\sqrt{\text{Hz}}$	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$ $f = 100\text{Hz}$
		$f = 10\text{kHz}$	4	10	10	10	10	10	$\text{nV}/\sqrt{\text{Hz}}$	$V_{DG} = 10\text{V}, I_D = 5\text{mA}$ $f = 10\text{kHz}$


SOT-23

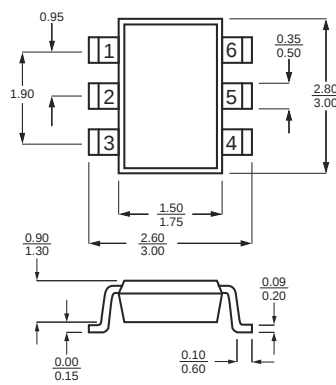


TO-71 Six Lead

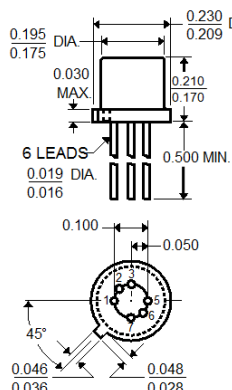


TO-78

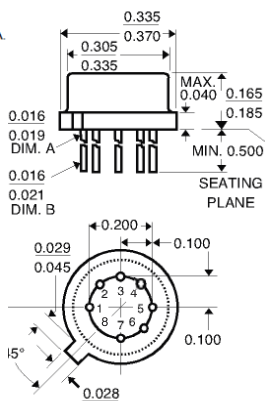


PDIP




SOIC

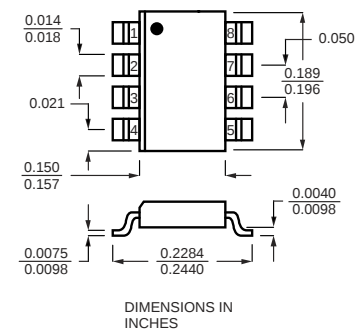


PDIP-A




PDIP-B



SOIC-A



SOIC-B



Please contact the factory regarding the availability of optional packages.

NOTES

1. Absolute maximum ratings are limiting values above which serviceability may be impaired.
2. Pulse Test: $PW \leq 300\mu s$ Duty Cycle $\leq 3\%$
3. Assumes smaller value in numerator.
4. Derate $4mW/^{\circ}C$ above $25^{\circ}C$.

Information furnished by Linear Integrated Systems is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.

Linear Integrated Systems (LIS) is a 25-year-old, third-generation precision semiconductor company providing high-quality discrete components. Expertise brought to LIS is based on processes and products developed at Amelco, Union Carbide, Intersil and Micro Power Systems by company President John H. Hall. Hall, a protégé of Silicon Valley legend Dr. Jean Hoerni, was the director of IC Development at Union Carbide, Co-Founder and Vice President of R&D at Intersil, and Founder/President of Micro Power Systems.

Linear Integrated Systems

• 4042 Clipper Court • Fremont, CA 94538 • Tel: 510 490-9160 • Fax: 510 353-0261
Doc 201132 03/03/2020 Rev#A9 ECN# LS5911 LS5912 LS5912C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linear Integrated Systems:

[LS5911-SOIC-8L-A-CT](#) [LS5911-SOIC-8L-A-TB](#) [LS5911-SOIC-8L-A-TR](#) [LS5911-SOT-23-6L-CT](#) [LS5911-SOT-23-6L-TR](#) [LS5911-TO-71-6L-BK](#) [LS5911-TO-78-6L-BK](#) [LS5912C-SOIC-8L-CT](#) [LS5912C-SOIC-8L-TB](#) [LS5912C-SOIC-8L-TR](#) [LS5912C-SOT-23-6L-CT](#) [LS5912C-SOT-23-6L-TR](#) [LS5912C-TO-71-6L-BK](#) [LS5912C-TO-78-6L-BK](#) [LS5912-SOIC-8L-B-CT](#) [LS5912-SOIC-8L-B-TB](#) [LS5912-SOIC-8L-B-TR](#) [LS5912-SOT-23-6L-CT](#) [LS5912-SOT-23-6L-TR](#) [LS5912-TO-71-6L-BK](#) [LS5912-TO-78-6L-BK](#) [LS5911 SOIC 8L-A](#) [LS5912 TO-78 6L](#) [LS5912 SOIC 8L-B](#) [LS5912C SOIC 8L](#)