

## Series 804 Push-Pull High-Speed Mighty Mouse

**Quick-Disconnect Receptacle Connector** with size #23 Crimp Rear Release Contacts 804-028 and 804-029 Ordering Information



**Integral Band Platform** 

reliefs and backshells.

for direct attachment of a cable shield.

Install a boot, or overmold directly

onto the band platform. Or, choose an

accessory thread for attaching strain

In-Line 804-028-01



Mount 804-028-07

## **Three Shell Styles**


Jam nut with O-ring for front or rear panel mounting, or in-line receptacles for free-hanging cables.




## Watertight, Shielded

O-ring inside the receptacle provides a dynamic seal when mated. Gold-plated spring provides secure mechanical retention and low shell-to-shell resistance for excellent EMI shielding.

How To Order								
Sample Part Number			804-028	-07	м	6-7	Р	A
Series (See Table I)	804-028 = With Banding Platform 804-029 = With Accessory Thread							
Shell Style	-00 = Jam Nut, Front Panel Mount -01 = In-Line for Free-Hanging Cable -07 = Jam Nut, For Rear Panel Mounting							
Shell Material and Finish	<ul> <li>M = Aluminum / Electroless Nickel RoHS Compliant</li> <li>NF = Aluminum / Cadmium with Olive Drab Chromate</li> <li>ZN = Aluminum / Zinc-Nickel with Olive Drab Chromate</li> <li>ZNU = Aluminum / Zinc-Nickel with Black Chromate</li> <li>Z1 = Stainless Steel / Passivated RoHS Compliant</li> </ul>							
Shell Size - Insert Arrangement (See Table II)	6-4, 6-7, 7-10, 9-19, 10-26							
Contact Type	Connector supplied with contacts P = Pin	Connector supplied without contacts A = Pin Connector	Connector Supplied with 30 AWG Crimp G = Pin					
Shell Key Positions (See Table III)	S = Socket A = Normal B = Pos. B	$\mathbf{B} = \text{Socket Connector}$ $\mathbf{C} = \text{Pos. C}  \mathbf{D} = \text{Pos. D}  \mathbf{E} = \text{Pos}$	H = Socket					



© 2014 Glenair, Inc.

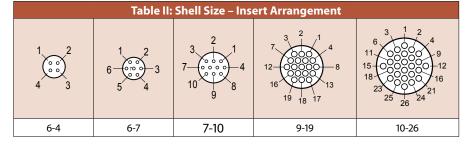

U.S. CAGE Code 06324

Dimensions in Inches (millimeters) are subject to change without notice.

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912 Q-6 E-Mail: sales@glenair.com www.glenair.com

Series 80 Mighty Mouse

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair: 804-028-07M7-10SB