


HOA0149

Reflective Sensor

FEATURES

- Phototransistor output
- Focused for maximum response
- Low profile housing

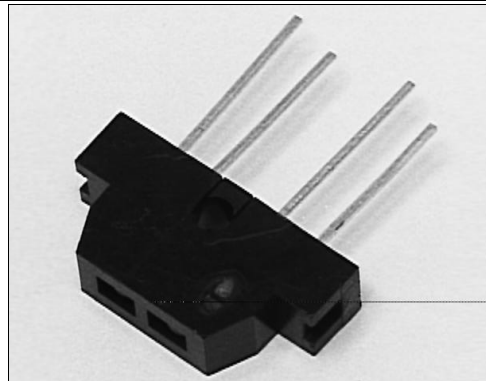

INFRA-59.TIF


DESCRIPTION

The HOA0149 consists of an infrared emitting diode and an NPN silicon phototransistor encased side-by-side on converging optical axes in a black thermoplastic housing. The phototransistor responds to radiation from the IRED only when a reflective object passes within its field of view. The HOA0149 employs plastic molded components. For additional component information see SEP8505 and SDP8405.

Housing material is ABS. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals ±0.010(0.25)
2 plc decimals ±0.020(0.51)

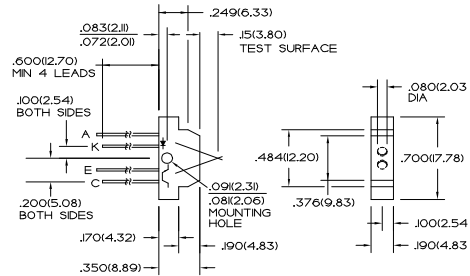

DIM_038.cdr

HOA0149

Reflective Sensor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|---|---------------|-----|-----|-----|---------------|--|
| IR EMITTER | | | | | | |
| Forward Voltage | V_F | | 1.6 | | V | $I_F=20\text{ mA}$ |
| Reverse Leakage Current | I_R | | 10 | | μA | $V_R=3\text{ V}$ |
| DETECTOR | | | | | | |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | 30 | | | V | $I_C=100\ \mu\text{A}$ |
| Emitter-Collector Breakdown Voltage | $V_{(BR)ECO}$ | 5.0 | | | V | $I_E=100\ \mu\text{A}$ |
| Collector Dark Current | I_{CEO} | | 100 | | nA | $V_{CE}=15\text{ V}, I_F=0$ |
| COUPLED CHARACTERISTICS | | | | | | |
| On-State Collector Current HOA0149-001 | $I_{C(ON)}$ | 1.0 | | | mA | $V_{CE}=5\text{ V}, I_F=40\text{ mA}$ (1) |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | | 0.4 | | V | $I_C=125\ \mu\text{A}, I_F=40\text{ mA}$ (1) |
| Rise And Fall Time | t_r, t_f | | 15 | | μs | $V_{CC}=5\text{ V}, I_C=1\text{ mA}$ |

Notes

1. Test surface is a front surface mirror (polished aluminum, 85% reflectance) located 0.15 in.(3.80 mm) from the front surface of the device.

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)


| | |
|-------------------------------|---------------|
| Operating Temperature Range | -40°C to 85°C |
| Storage Temperature Range | -40°C to 85°C |
| Soldering Temperature (5 sec) | 240°C |

IR EMITTER

| | |
|----------------------------|-----------|
| Power Dissipation | 70 mW (1) |
| Reverse Voltage | 3 V |
| Continuous Forward Current | 50 mA |

DETECTOR

| | |
|---------------------------|-----------|
| Collector-Emitter Voltage | 30 V |
| Emitter-Collector Voltage | 5 V |
| Power Dissipation | 70 mW (1) |
| Collector DC Current | 30 mA |

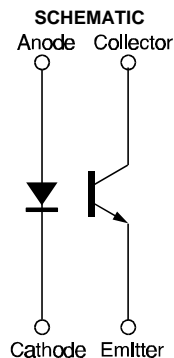

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

HOA0149

Reflective Sensor

Fig. 1 IRED Forward Bias Characteristics

gra_073.ds4

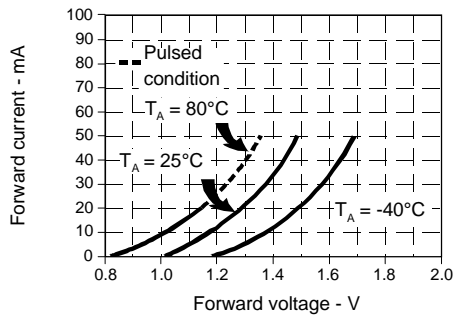


Fig. 2 Non-Saturated Switching Time vs Load Resistance

gra_074.ds4

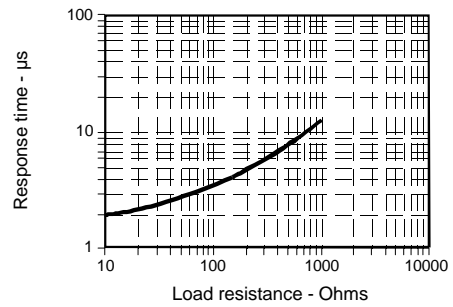


Fig. 3 Dark Current vs Temperature

gra_301.cdr

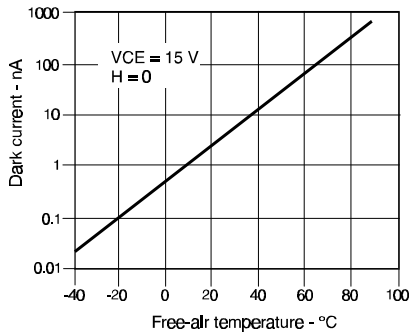


Fig. 4 Collector Current vs Ambient Temperature

gra_076.ds4

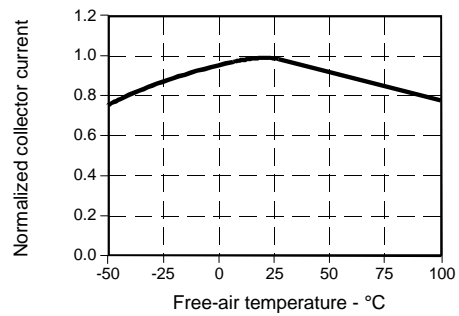


Fig. 5 Collector Current vs Distance to Reflective Surface

gra_077.ds4


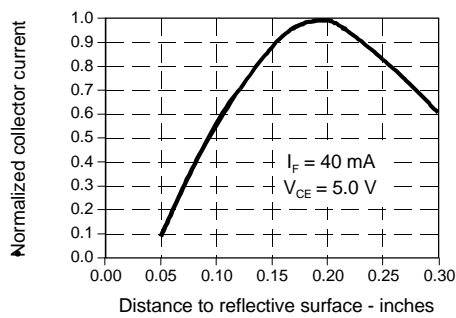


Fig. 6 Collector Current vs IRED Forward Current

gra_078.ds4

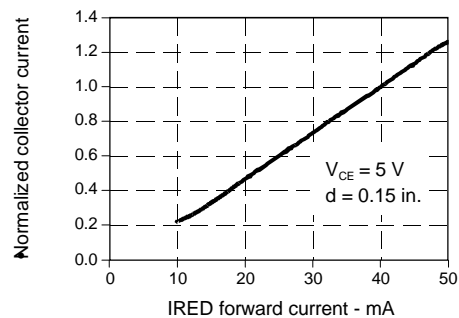

All Performance Curves Show Typical Values

HOA0149
Reflective Sensor



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[HOA0149-001](#)