

www.lemo.com

# FMP.2M.310.XLCT

## **SUMMARY**

#### # Wires

Low voltage 10

Image is for illustrative purpose only

Series 2M

**Termination type** Male crimp

IP rating 68

AWG wire size 24.00 - 20.00 Cable Ø 6.50 - 13.00 mm

**Status** active

Matching parts PMP.2M.310.XLMT

### **Download**

Request a quote

Catalog

See video assembly instructions

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model FM\*: Straight plug, key (N) or keys (P, R, S, T, U, V, W and X) with knurled grip and mold

stop

**Keying** 3 keys (beta=150, gamma=60, plug: male contacts, receptacle: female contacts)

Housing Material

Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces

bronze/brass

Weight 9.66 g

### **Performance**

**Configuration** 2M.310 : 10 Low Voltage

Insulator L: PEEK
Rated Current 8 Amps

## **Specifications**

Contact Type: Crimp Contact Retention: 30 N

Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 1.1 mm (0.043in)

Min. Conductor: 0.25 mm<sup>2</sup> (AWG 24) Max. Conductor: 0.5 mm<sup>2</sup> (AWG 20)

R (max): 4.8 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms) Contact-contact: 1.8 Test voltage (kV rms) Contact-shell: 1.2

### **Others**

Endurance (Shell): 3000 mating cycles Temp (min / max): -20°C / +200°C Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]


Shock Resistance: 300 g [ 3 ms]

Lighting strike EIA 364-75: 10K amps - 6 times Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >= 70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: max. 48 hr

## **DRAWINGS**

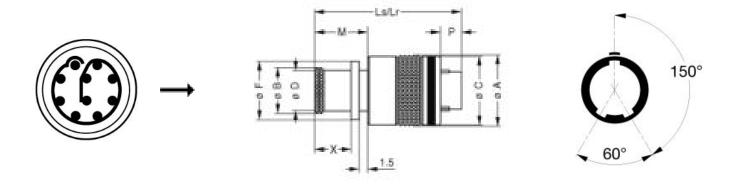

### **Dimensions**

	А	В	С	D	F	Lr	Ls	М	Р	Х
mm.	17.6	14	17.2	13	15.5	27.5	27.5	10.1	3.9	7.1
in.	0,69	0,55	0,68	0,51	0,61	1,08	1,08	0,40	0,15	0,28

## **RECOMMENDED BY LEMO**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **Tools**

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 20-22-24/6-5-5

Positionner: <u>DCE.91.090.5MVC</u>

Extractor: DCF.93.090.4LT

Replacement contact: FGN.0M.560.ZZC

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

FMP.2M.310.XLCT