


HiPerFET™ Power MOSFETs

N-Channel Enhancement Mode
High dv/dt, Low t_{rr} , HDMOS™ Family

IXFH 76 N06-11
IXFH 76 N06-12
IXFH 76 N07-11
IXFH 76 N07-12


V_{DSS}	I_{D25}	$R_{DS(on)}$
60 V	76 A	11 mΩ
60 V	76 A	12 mΩ
70 V	76 A	11 mΩ
70 V	76 A	12 mΩ

Preliminary data sheet



Symbol	Test Conditions	Maximum Ratings		
V_{DSS}	$T_J = 25^\circ\text{C}$ to 175°C	N06	60	V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 175°C ; $R_{GS} = 10\text{ k}\Omega$	N06	60	V
		N07	70	V
V_{GS}	Continuous		± 20	V
V_{GSM}	Transient		± 30	V
I_{D25}	$T_C = 25^\circ\text{C}$ (Chip capability = 125 A)		76	A
I_{D119}	$T_C = 119^\circ\text{C}$, limited by external leads		76	A
I_{DM}	$T_C = 25^\circ\text{C}$, pulse width limited by T_{JM}		304	A
I_{AR}	$T_C = 25^\circ\text{C}$		100	A
E_{AR}	$T_C = 25^\circ\text{C}$		30	mJ
E_{AS}			2	J
dv/dt	$I_S \leq I_{DM}$, $di/dt \leq 100\text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ\text{C}$, $R_G = 2\ \Omega$		5	V/ns
P_D	$T_C = 25^\circ\text{C}$		360	W
T_J			-55 ... +175	$^\circ\text{C}$
T_{JM}			175	$^\circ\text{C}$
T_{stg}			-55 ... +150	$^\circ\text{C}$
T_L	1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$
M_d	Mounting torque		1.15/10	Nm/lb.in.
Weight			6	g

TO-247 AD



G = Gate, D = Drain,
S = Source, TAB = Drain

Features

- International standard package JEDEC TO-247 AD
- Low $R_{DS(on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance - easy to drive and to protect
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls
- Low voltage relays


Advantages

- Easy to mount with 1 screw (isolated mounting screw hole)
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_{DSS}	$V_{GS} = 0\text{ V}$, $I_D = 250\ \mu\text{A}$	N06	60	V
		N07	70	V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 4\text{ mA}$		2.0	3.4 V
I_{GSS}	$V_{GS} = \pm 20\text{ V}_{DC}$, $V_{DS} = 0$			$\pm 100\text{ nA}$
I_{DSS}	$V_{DS} = 0.8 \cdot V_{DSS}$, $V_{GS} = 0\text{ V}$	$T_J = 25^\circ\text{C}$		100 μA
		$T_J = 125^\circ\text{C}$		500 μA
$R_{DS(on)}$	$V_{GS} = 10\text{ V}$, $I_D = 40\text{ A}$	76N06/N07-11		11 mΩ
		76N06/N07-12		12 mΩ
	Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$			

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
g_{fs}	$V_{DS} = 10\text{ V}; I_D = 40\text{ A}$, pulse test	30	40	S
C_{iss}	$V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$		4400	pF
C_{oss}			2000	pF
C_{rss}			1200	pF
$t_{d(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 50\text{ V}, I_D = 30\text{ A}$ $R_G = 1\ \Omega$ (External)		40	ns
t_r			70	ns
$t_{d(off)}$			130	ns
t_f			55	ns
$Q_{g(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 40\text{ A}$		240	nC
Q_{gs}			30	nC
Q_{gd}			120	nC
R_{thJC}			0.42	K/W
R_{thCK}		0.25		K/W

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
I_S	$V_{GS} = 0\text{ V}$			76 A
I_{SM}	Repetitive; pulse width limited by T_{JM}			304 A
V_{SD}	$I_F = I_S, V_{GS} = 0\text{ V}$, Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$			1.5 V
t_{rr}	$I_F = 25\text{ A}, -di/dt = 100\text{ A}/\mu\text{s}, T_J = 25^\circ\text{C}$ $V_R = 25\text{ V}, T_J = 125^\circ\text{C}$		150	ns 250 ns

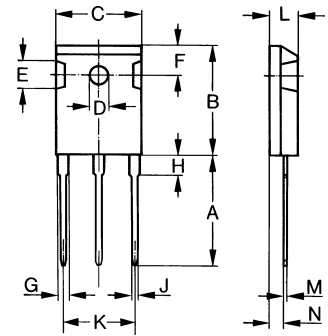TO-247 AD (IXFH) Outline


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

Fig.1 Output Characteristics

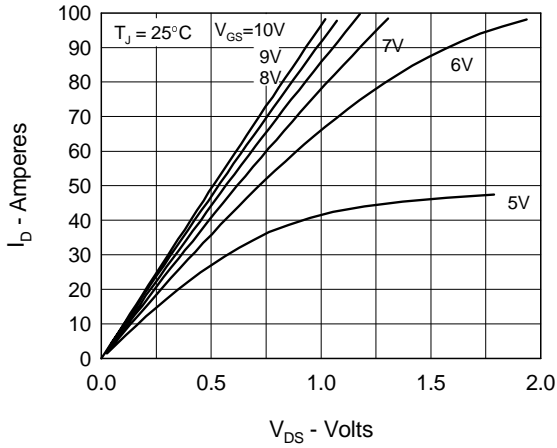


Fig. 2 Input Admittance

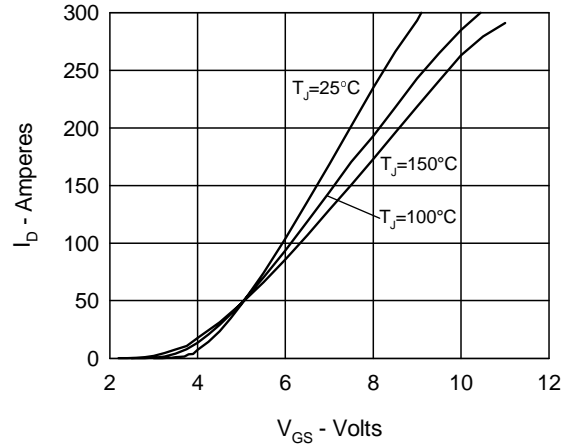


Fig. 3 $R_{DS(on)}$ vs. Drain Current

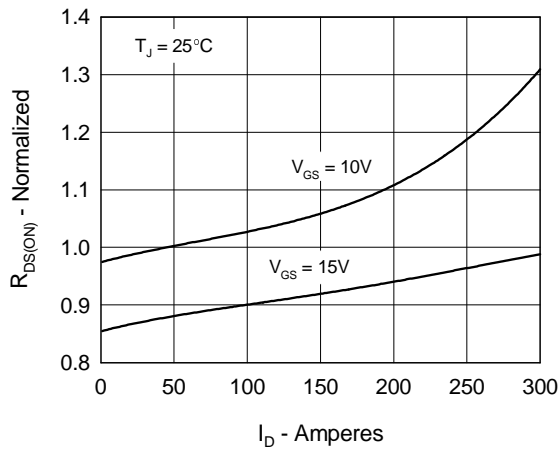


Fig. 4 $R_{DS(on)}$ Temperature Dependence

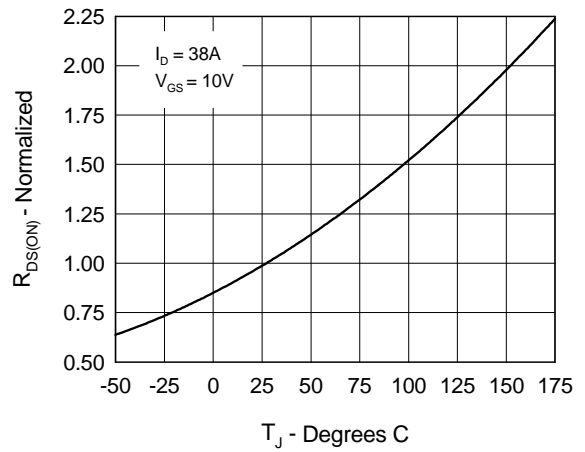


Fig. 5 I_D vs. Case Temperature

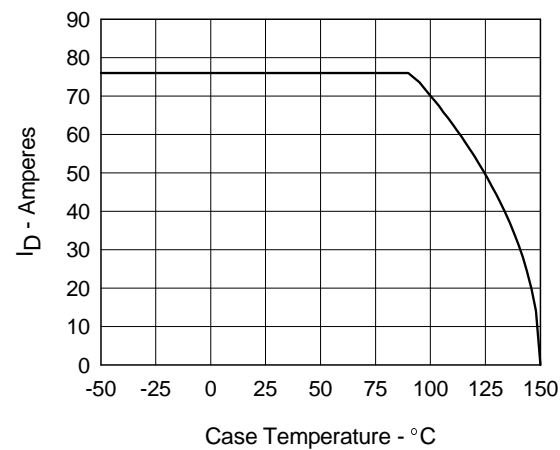


Fig. 6 Transconductance

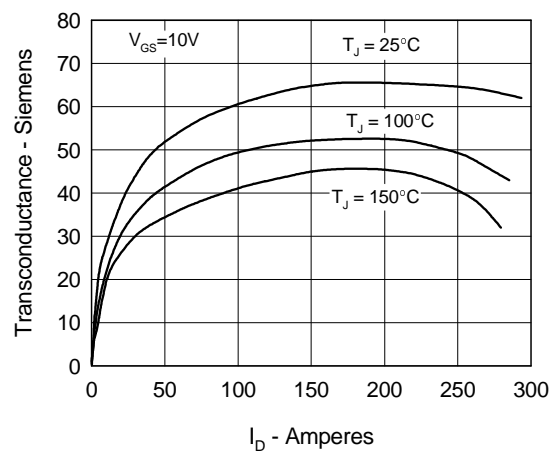


Fig. 7 Gate Charge

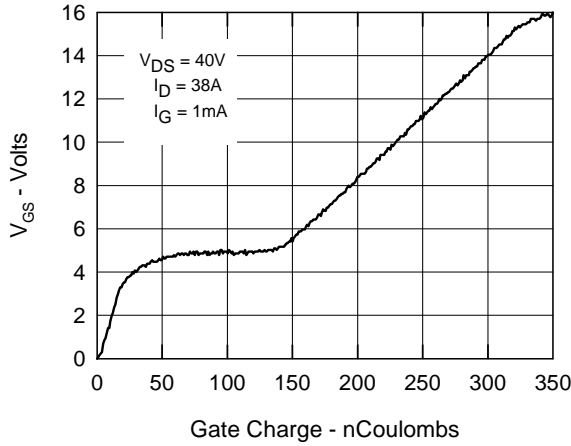


Fig. 8 Forward Bias Safe Operating Area

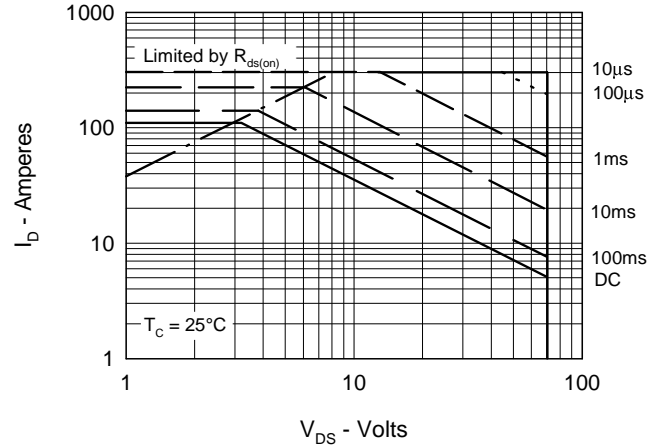


Fig. 9 Capacitance Curves

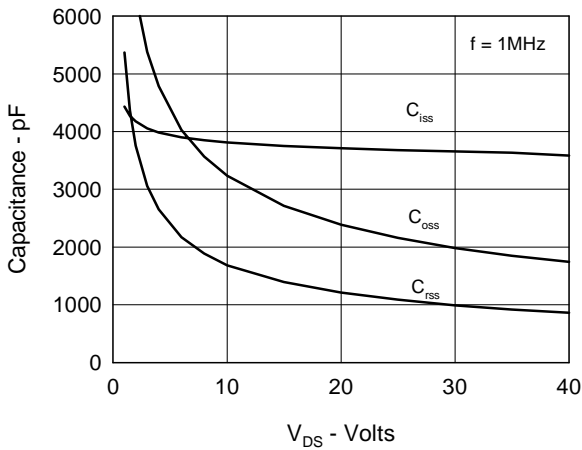


Fig. 10 Source Current vs. Source to Drain Voltage


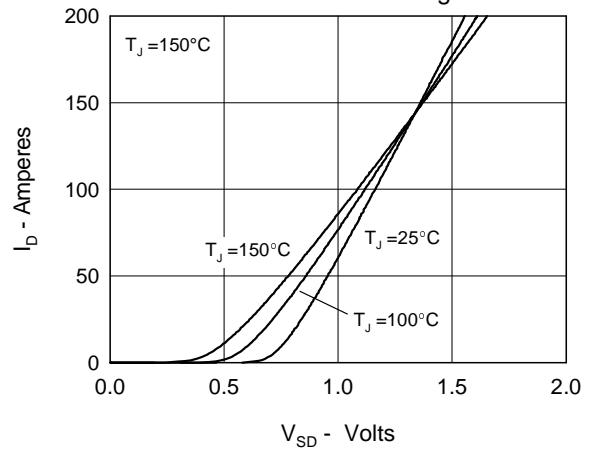


Fig. 11 Transient Thermal Impedance



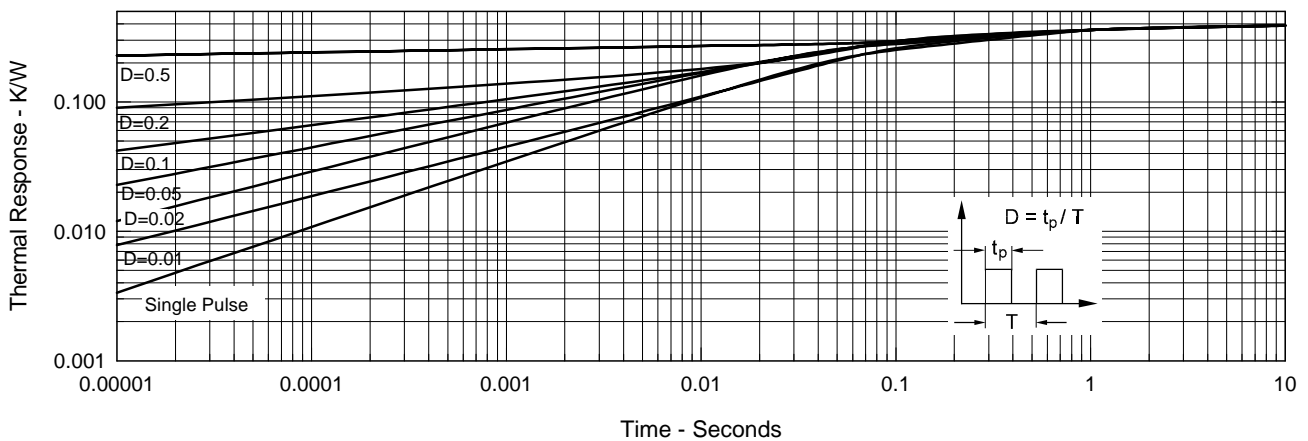

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[IXFH76N07-11](#) [IXFH76N07-12](#)