

18000 series

Snap-action momentary pushbutton switches



DISTINCTIVE FEATURES

Panel and PC mount models

Snap-in panel mounting version

Tactile feedback



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - gold plated brass contacts : 100 mA - 30 VDC
 - gold plated silver contacts : 1 A 30 VDC
- Initial contact resistance : 50 mΩ max.
- Insulation resistance : 1,000 MΩ min.
- Dielectric strength : 1,000 Vrms 50 Hz min.
- Electrical life : 60,000 cycles at full load



GENERAL SPECIFICATIONS

- Total travel : 0.5 mm (.019)
- Torque : 1.25 Nm (.922 Ft.lb) max. applied to nut
- Operating temperature : -30 °C to +65 °C (-22 °F to +149 °F)
- Soldering : 300 °C (572 °F), 3 sec. max.



MATERIALS

- Case : PBT
- Actuator : polyamide, glass filled
- Bushing : brass, nickel plated
- Housing : stainless steel
- Bracket : tin plated steel
- Contacts
 - AD : silver, gold plated
 - CD : brass, gold plated
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

The company reserves the right to change specifications without notice.





18000 series

Snap-action momentary pushbutton switches




TERMINALS




ELECTRICAL FUNCTION

→ KEYWAY



Plain bushing




Threaded bushing




PANEL CUT-OUT


18500 - 18200




18700 - 18900



18800



With bezel U1200




With bezel U1210 for LED

18000 series

Snap-action momentary pushbutton switches



BUILD YOUR PART NUMBER

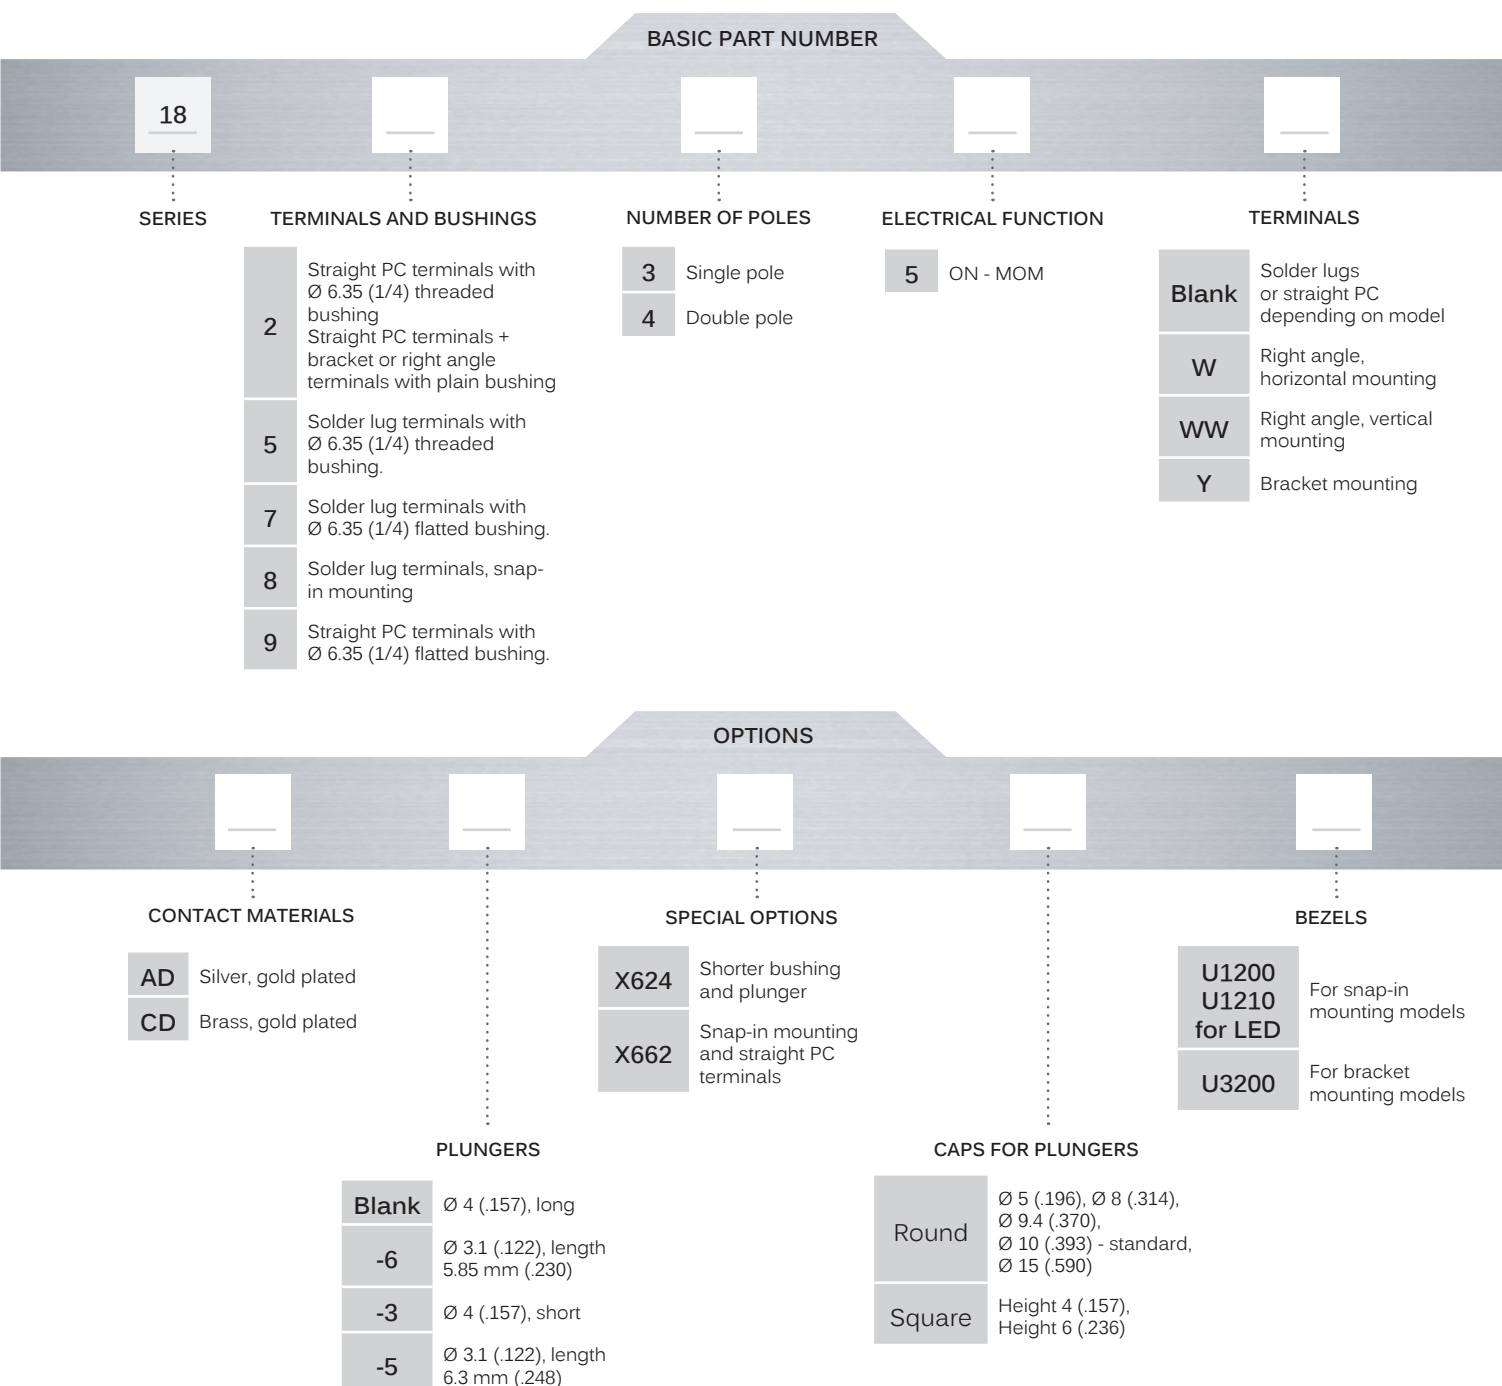

ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

- ⚠ **Notice** : please note that not all combinations of above numbers are available. Refer to following pages for further information.
- 💧 **Sealing boots** are available to protect the switches against dust and water. See "Sealing Boots" section on website.
- 🔧 **Mounting accessories** : standard hardware supplied with all models with Ø 6,35 (1/4) threaded bushing : 2 hex nuts 8 mm (.314) across flats, 1 locking ring and 1 lockwasher. Standard and special hardware is presented in the "Hardware" section of website.

18000 series

Snap-action momentary pushbutton switches

THREADED BUSHING

SOLDER LUG TERMINALS : 18500



Single pole

18535



1-3

ON



1-2

MOM

Double pole

18545

ON

MOM

FLATTED BUSHING

SOLDER LUG TERMINALS : 18700



Single pole

18735



1-3

ON



1-2

MOM

Double pole

18745

ON

MOM

THREADED BUSHING

STRAIGHT PC TERMINALS : 18200



Single pole

18235



1-3

ON



1-2

MOM

Double pole

18245

ON

MOM

FLATTED BUSHING - STRAIGHT PC

TERMINALS : 18900



Single pole

18935



1-3

ON



1-2

MOM

Double pole


18945

ON


MOM

→ KEYWAY


Shown with standard plunger

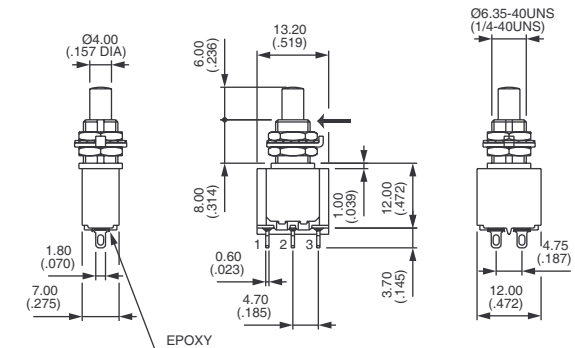


→ KEYWAY

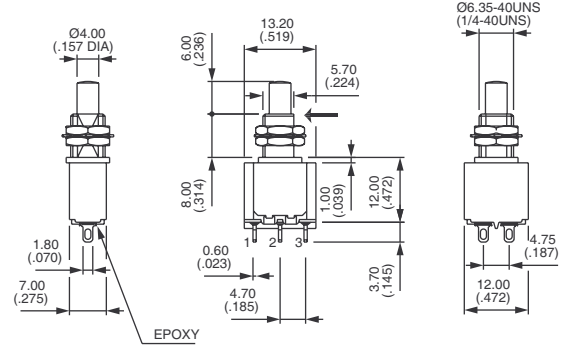

→ KEYWAY

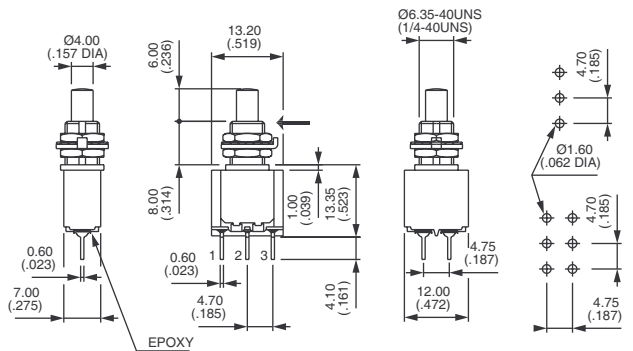

→ KEYWAY

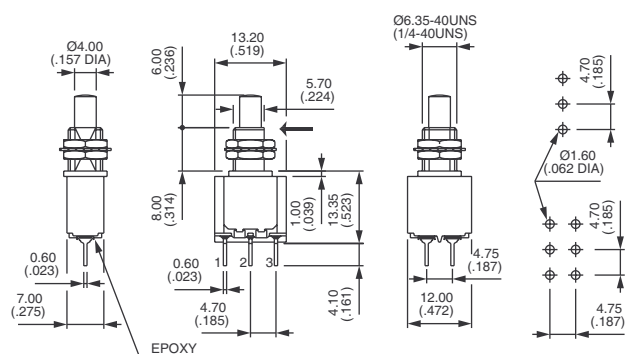

18000 series

Snap-action momentary pushbutton switches

PLAIN BUSHING - RIGHT ANGLE TERMINALS VERTICAL : 18200WW



Single pole

18235WW

1-3

ON

1-2


MOM

Double pole

18245WW

ON

MOM

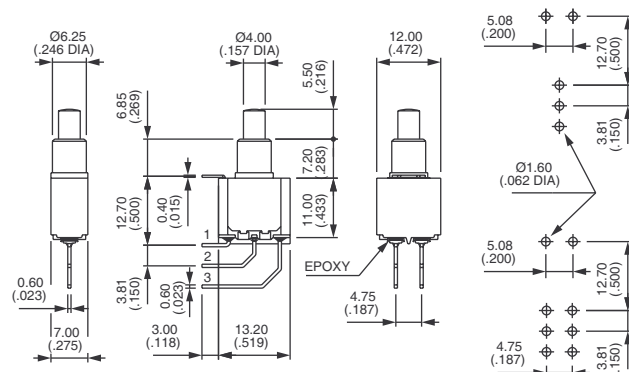

CONTACT MATERIALS

BASIC P/N


AD Silver, gold plated
CD Brass, gold plated

PLUNGERS


BASIC P/N

Dash compulsory before plunger code.


Blank Ø 4 (.157) - long
-6 Ø 3.1 (.122)
-3 Ø 4 (.157) - short
-5 Ø 3.1 (.122)



Blank







-6



-3


-5




SPECIAL OPTIONS

BASIC P/N

X371 Plain bushing Ø 6.25 mm (.246) (instead of standard threaded bushing).
X372 Shorter threaded bushing Ø 6.35 (1/4). Height 7 mm (.274).



X371



X372


18000 series

Snap-action momentary pushbutton switches

SPECIAL OPTIONS (CONTINUED)



- X386** Threaded bushing $\varnothing$ 6.35 mm (1/4) to replace plain bushing on models W - WW and Y.
- X438** Plain bushing $\varnothing$ 6.25 mm (.246). Height 7,2 mm (.283) - **without shoulder**.
- X624** Straight PC terminals - bracket mounting - with shorter bushing and plunger
- X662** Snap-in mounting - straight PC terminals

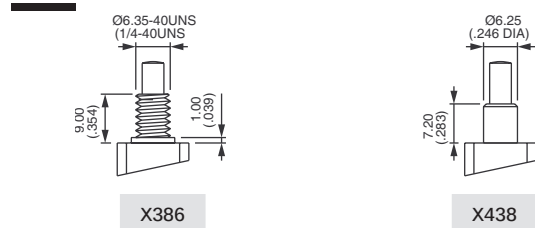

OPTION X624 - SINGLE POLE




18235Y -2X624



ON



MOM

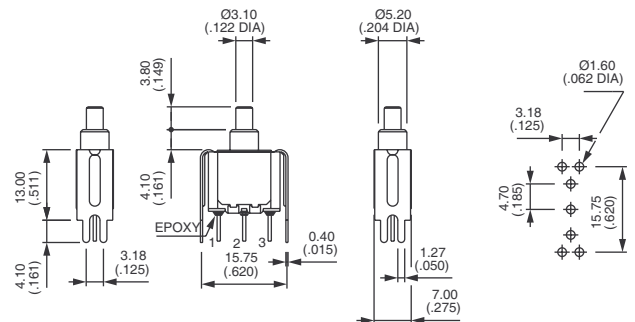

OPTION X624 - DOUBLE POLE




18245Y -2X624




ON



MOM

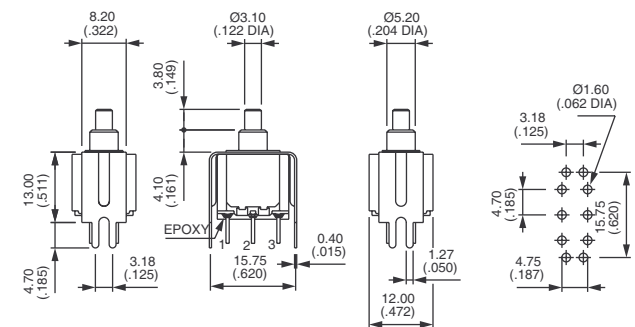


OPTION X662

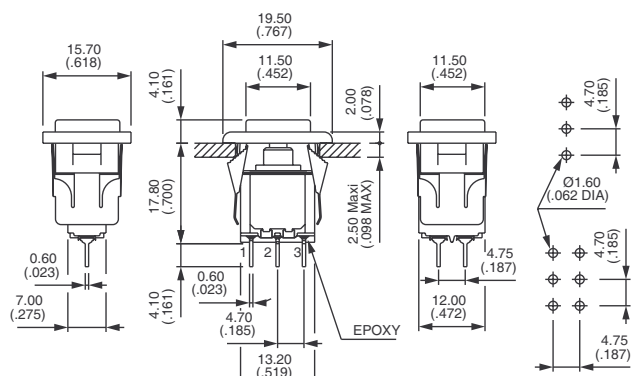

18000 series


Snap-action momentary pushbutton switches

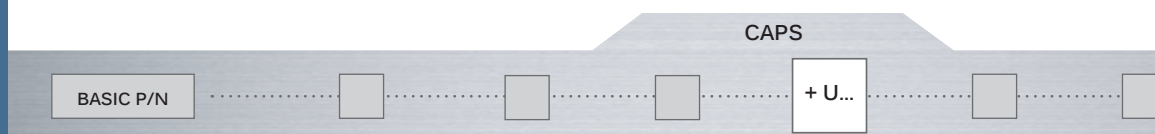


For cap colors, replace last "0" by number :

1	Blue	5	Yellow
1/4	Dark blue	6	Red
2	Black	7	Ivory
3	Green	7/1	White
4	Grey	9	Orange


CAPS FOR Ø 4 (.157) PLUNGERS (-13, -3)

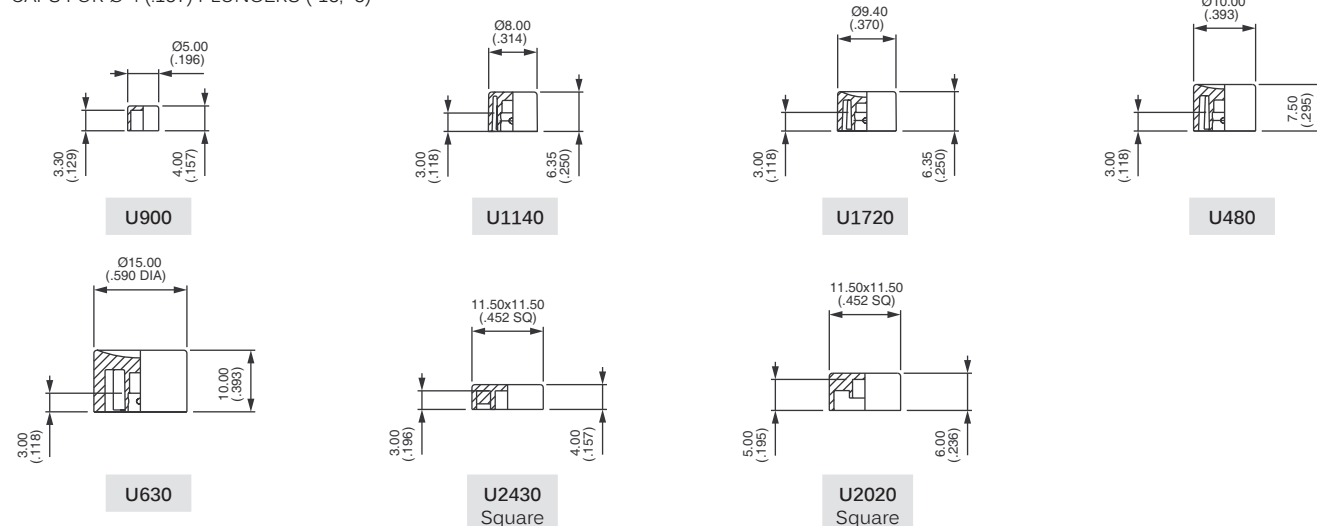

CAPS FOR Ø 3.1 (.122) PLUNGERS (-5, -6)

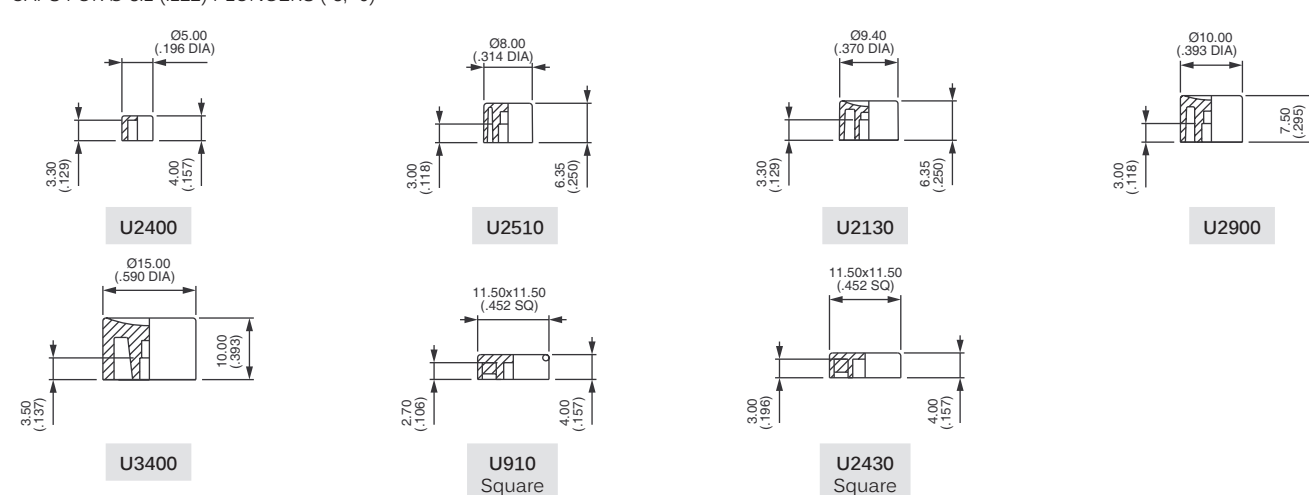

CAPS FOR Ø 3.1 (.122) PLUNGERS (-5, -6)

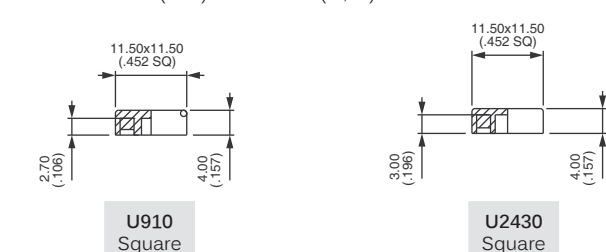

18000 series

Snap-action momentary pushbutton switches

BEZELS




For cap colors, replace last "0" by number :


1	Blue	5	Yellow
1/4	Dark blue	6	Red
2	Black	7	Ivory
3	Green	7/1	White
4	Grey	9	Orange

STANDARD PANEL MOUNTING

Panel thickness with bezel : 1 mm (.039) to 2.5 mm (.098)




18800 + U910 + U1200




18800 + U910 + U1210

FOR BRACKET MOUNTING MODELS (18200Y & 18200YX624)




U3200

FOR SNAP-IN MODELS (18800 - 18800X662)



U1200

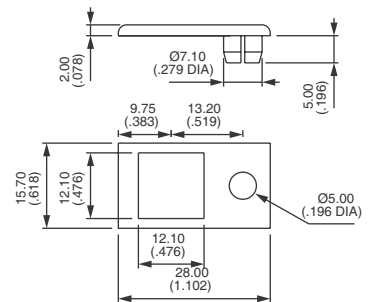

U1210
For LED Ø 5 - not supplied


DRESS NUTS

Order separately. For models with threaded bushing (18500 - 18700 - 18200 - 18900)
Chrome plated.


U1636 For caps U1140 and U2510

U840 For cap U480 and U2900


U825 For caps U630 and U3400



U1636



U840



U825

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[1813469](#) [1803469](#) [18235WCD](#) [1801969](#) [1801669](#) [1803869](#) [1800269](#) [18835AD](#) [1803369](#)