


## BT Series Reed Relays

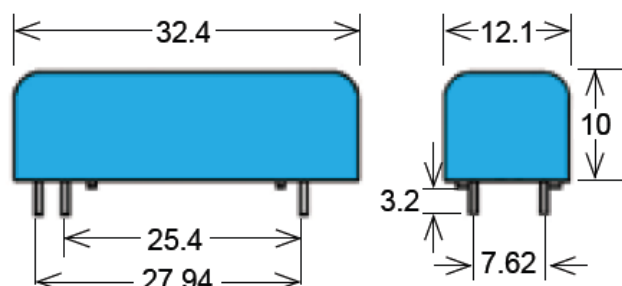

- Features: Low Thermal Voltage Relay, High Insulation Resistance, High Voltage
- Applications: High Precision Measuring Devices, Changeover Switch for Resistance Thermometers & Others
- Markets: Test and Measurement & Others

Part Description: **BT 00-2X 00**

Nominal Voltage	Contact QTY	Contact Form	Switch Model
05, 12, 24	2	A	66, 75

Customer Options	Switch Model		Unit
Contact Data	66	75	
<b>Rated Power (max.)</b> Any DC combination of V&A not to exceed their individual max.'s	10	10	W
<b>Switching Voltage (max.)</b> DC or peak AC	200	500	V
<b>Switching Current (max.)</b> DC or peak AC	0.5	0.5	A
<b>Carry Current (max.)</b> DC or peak AC	1.0	1.0	A
<b>Contact Resistance (max.)</b> @ 0.5V & 50mA	150	200	mOhm
<b>Breakdown Voltage (min.)</b> According to EN60255-5	0.225	0.6	kVDC
<b>Operating Time (max.)</b> Incl. Bounce; Measured with w/ Nominal Voltage	0.5	0.5	ms
<b>Release Time (max.)</b> Measured with no Coil Excitation	0.1	0.1	ms
<b>Insulation Resistance (typ.)</b> Rh<45%, 100V Test Voltage	10 <sup>10</sup>	10 <sup>11</sup>	Ohm
<b>Capacitance (typ.)</b> @ 10kHz across open Switch	0.2	0.4	pF

## Series Datasheet – BT Reed Relays

[www.standexmeder.com](http://www.standexmeder.com)

Coil Data		Coil Voltage (nom.)	Coil Resistance (typ.)	Pull-In Voltage (max.)	Drop-Out Voltage (min.)	Nominal Coil Power (typ.)
Contact Form	Switch Model					
Unit		VDC	Ohm	VDC	VDC	mW
2A	66	05	900	3.8	1.0	27
		12	5,100	9.0	2.0	28
		24	20,500	18.0	3.5	28
	75	05	900	3.8	1.0	27

The Pull-In / Drop-Out Voltage and Coil Resistance will change at rate of 0.4% per °C

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-20 to 85	°C
Storage Temperature	-35 to 100	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

Handling & Assembly Instructions	
➤	Switching inductive and/or capacitive loads create voltage and/or current peaks, which may damage the relay. Protective circuits need to be used.
➤	External magnetic fields needs to be taken into consideration, including a too high packing density. This may influence the relays' electrical characteristics.
➤	Mechanical shock impacts e.g. dropping the relays may cause immediate or post-installation failure.
➤	Wave soldering: maximum 260°/5 seconds.
➤	Reflow soldering: Recommendations given by the soldering paste manufacturer need to be considered as well as the temperature limits of other components/processes.


Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

### BT Reed Relay



### Life Test Data


\*Load increase reduces life expectancy of Reed Switches

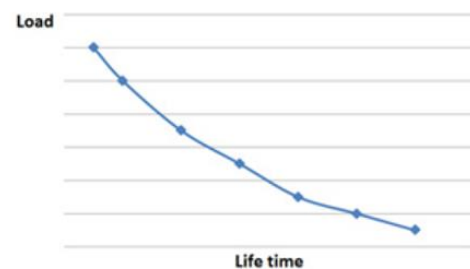

Pin Out

**BT**

View from top of component  
2.54mm [0.10"] pitch grid

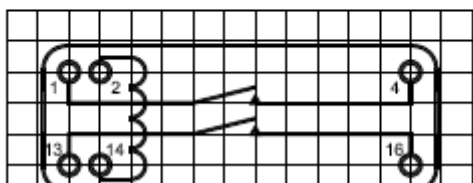

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Standex Electronics:](#)

[BT05-2A66](#) [BT24-2A66](#)