

G3VM-201G□/S5

MOS FET Relays SOP 4-pin, General-purpose Type

General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- Load voltage: 200 V



Note: The actual product is marked differently from the image shown here.


Application Examples

- Semiconductor test equipment
- Security equipment
- Amusement equipment
- Test & Measurement equipment
- Industrial equipment
- Communication equipment
- Power circuit

Package

(Unit : mm, Average)

SOP 4-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□
1 2 3 4

1. Load Voltage

20 : 200 V

2. Contact form

1 : 1a (SPST-NO)

3. Package

G : SOP 4-pin

4. Other informations

When specifications overlap, serial code is added in the recorded order.

Note: The model number legend for the G3VM-S5 is different from the above legend.

Ordering Information

| Package | Contact form | Terminals | Load voltage (peak value) * | Continuous load current (peak value) * | Stick packaging | | Tape packaging | |
|---------|--------------|----------------------------|-----------------------------|--|-----------------|--------------------------|----------------|--------------------------|
| | | | | | Model | Minimum package quantity | Model | Minimum package quantity |
| SOP4 | 1a (SPST-NO) | Surface-mounting Terminals | 200 V | 50 mA | G3VM-201G | 100 pcs. | G3VM-201G(TR) | 2,500 pcs. |
| | | | | 200 mA | G3VM-201G1 | | G3VM-201G1(TR) | |
| | | | | | G3VM-201G2 | | G3VM-201G2(TR) | |
| | | | | | G3VM-S5 | | G3VM-S5(TR) | |

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)


| Item | | Symbol | G3VM-201G | G3VM-201G1 | G3VM-201G2 | G3VM-S5 | Unit | Measurement conditions |
|-----------------------------------|--------------------------------------|---------------------|-------------|------------|------------|-------------|------------------|-------------------------------|
| Input | LED forward current | I _F | 50 | | 30 | 50 | mA | |
| | Repetitive peak LED forward current | I _{FP} | 1 | | | | A | 100 μs pulses, 100 pps |
| | LED forward current reduction rate | ΔI _F /°C | -0.5 | | -0.3 | -0.5 | mA/°C | T _a ≥ 25°C |
| | LED reverse voltage | V _R | 5 | | | | V | |
| | Connection temperature | T _J | 125 | | | | °C | |
| Output | Load voltage (AC peak/DC) | V _{OFF} | 200 | | | | V | |
| | Continuous load current (AC peak/DC) | I _o | 50 | 200 | | | mA | |
| | ON current reduction rate | ΔI _o /°C | -0.5 | | -2 | | mA/°C | T _a ≥ 25°C |
| | Pulse ON current | I _{op} | 150 | 600 | | | mA | t=100 ms, Duty=1/10 |
| | Connection temperature | T _J | 125 | | | | °C | |
| Dielectric strength between I/O * | | V _{I-O} | 1500 | | | | V _{rms} | AC for 1 min |
| Ambient operating temperature | | T _a | -40 to +85 | | | | °C | With no icing or condensation |
| Ambient storage temperature | | T _{stg} | -55 to +125 | | | -55 to +100 | °C | |
| Soldering temperature | | — | 260 | | | | °C | 10 s |

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | | G3VM-201G | G3VM-201G1 | G3VM-201G2 | G3VM-S5 | Unit | Measurement conditions |
|---|--|-------------------|-----------------|-----------|------------|------------|---------|---|--|
| Input | LED forward voltage | V _F | Minimum | 1.0 | | 1.1 | 1.0 | V | I _F =10 mA |
| | | | Typical | 1.15 | | 1.27 | 1.15 | | |
| | | | Maximum | 1.3 | | 1.4 | 1.3 | | |
| | Reverse current | I _R | Maximum | 10 | | | | μA | V _R =5 V |
| | Capacitance between terminals | C _T | Typical | 30 | | | | pF | V=0, f=1 MHz |
| | Trigger LED forward current | I _{FT} | Typical | 1 | 0.4 | — | 1 | mA | G3VM-201G : I _o =50 mA G3VM-201G1/201G2/S5 : I _o =200 mA |
| | | | Maximum | 3 | 1 | 0.2 | 3 | | |
| Release LED forward current | I _{FC} | Minimum | 0.1 | | — | 0.1 | mA | I _{OFF} =100 μA | |
| | | Typical | — | | 0.001 | — | | | |
| Output | Maximum resistance with output ON | R _{ON} | Typical | 40 | 5 | | Ω | G3VM-201G/S5: I _F =5 mA, I _o =Continuous load current ratings G3VM-201G1 : I _F =2 mA, I _o =200 mA G3VM-201G2 : I _F =0.5 mA, I _o =200 mA, t < 1 s | |
| | | | Maximum | 50 | 8 | | | | |
| | Current leakage when the relay is open | I _{LEAK} | Typical | — | 1 | | — | nA | G3VM-201G : V _{OFF} =160 V G3VM-201G1/201G2/S5 : V _{OFF} =200 V |
| | | | Maximum | 1 | 1,000 | | | | |
| | Capacitance between terminals | C _{OFF} | Typical | 15 | 90 | | 100 | pF | G3VM-201G : V=0, f=1 MHz, t < 10s G3VM-201G1/201G2/S5 : V=0, f=1 MHz |
| | | | Maximum | 20 | — | | | | |
| | Capacitance between I/O terminals | C _{I-O} | Typical | 0.8 | | | | pF | f=1 MHz, V _S =0 V |
| Insulation resistance between I/O terminals | R _{I-O} | Minimum | 1000 | | | | MΩ | V _{I-O} =500 VDC, R _{oH} ≤60% | |
| | | Typical | 10 ⁸ | | | | | | |
| Turn-ON time | t _{ON} | Typical | — | 3 | 3.5 | 0.6 | ms | G3VM-201G/S5 : I _F =5 mA, R _L =200 Ω, V _{DD} =20 V * G3VM-201G1 : I _F =2 mA, R _L =200 Ω, V _{DD} =20 V * G3VM-201G2 : I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V * | |
| | | Maximum | 0.5 | 8 | 10 | 1.5 | | | |
| Turn-OFF time | t _{OFF} | Typical | — | 0.6 | 1 | 0.1 | | | |
| | | Maximum | 0.2 | 3 | 5 | 1 | | | |

* Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


| Item | Symbol | | G3VM-201G | G3VM-201G1 | G3VM-201G2 | G3VM-S5 | Unit |
|---|-----------------|---------|-----------|------------|------------|---------|------|
| Load voltage (AC peak/DC) | V _{DD} | Maximum | 160 | | | 200 | V |
| Operating LED forward current | I _F | Minimum | 5 | — | | 5 | mA |
| | | Typical | 7.5 | 2 | 0.5 | 7.5 | |
| | | Maximum | 15 | 25 | | | |
| Continuous load current (AC peak/DC) | I _O | Maximum | 40 | 160 | | 130 | |
| Ambient operating temperature | T _a | Minimum | -20 | | | | °C |
| | | Maximum | 65 | | | | |

■Spacing and Insulation


| Item | Minimum | Unit |
|------------------------------|---------|------|
| Creepage distances | 4.0 | mm |
| Clearance distances | 4.0 | |
| Internal isolation thickness | 0.1 | |

Engineering Data


LED forward current vs. Ambient temperature

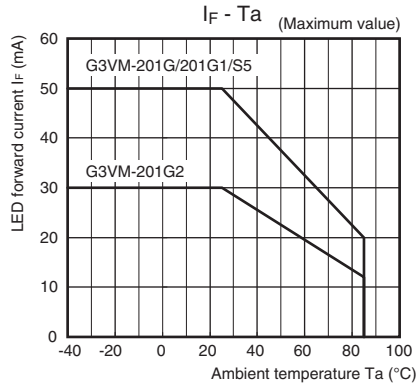


Continuous load current vs. Ambient temperature

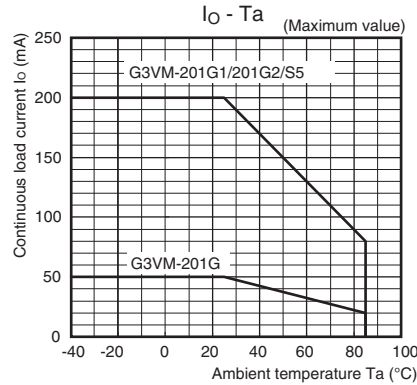


LED forward current vs. LED forward voltage

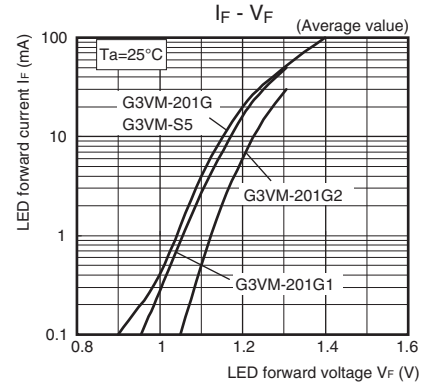


Continuous load current vs. On-state voltage

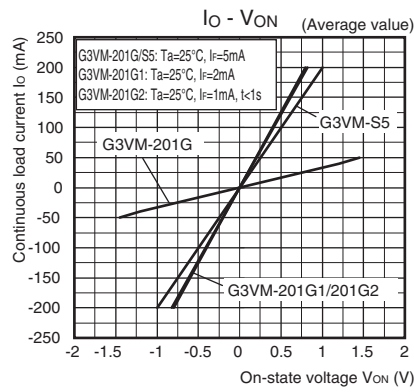


On-state resistance vs. Ambient temperature

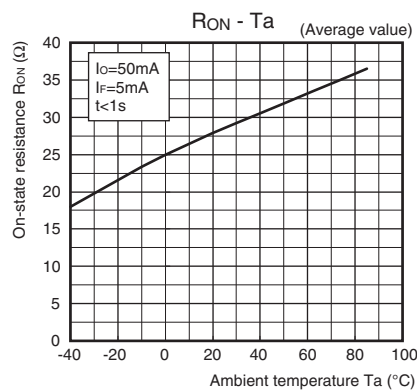


G3VM-201G1/201G2/S5

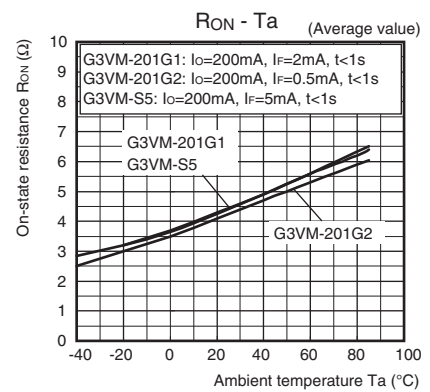


Trigger LED forward current vs. Ambient temperature

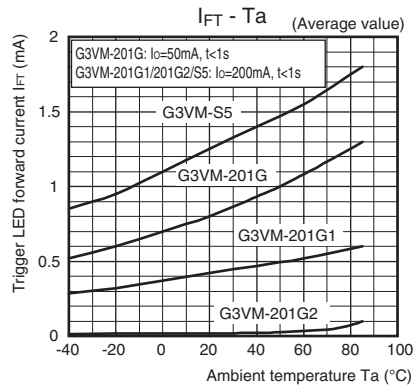

Turn ON, Turn OFF time vs. LED forward current

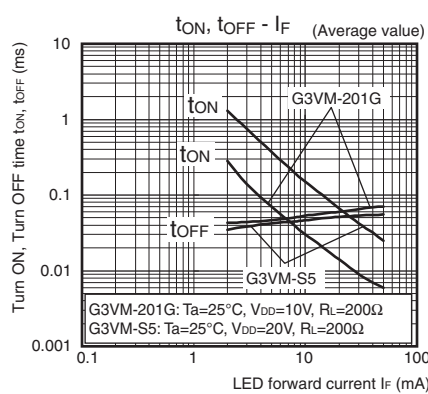


G3VM-201G1/201G2

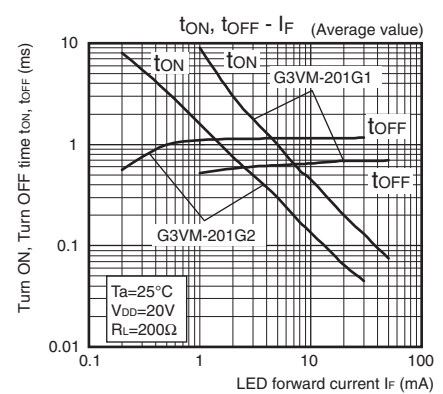


Engineering Data


● Turn ON, Turn OFF time vs. Ambient temperature G3VM-201G/S5

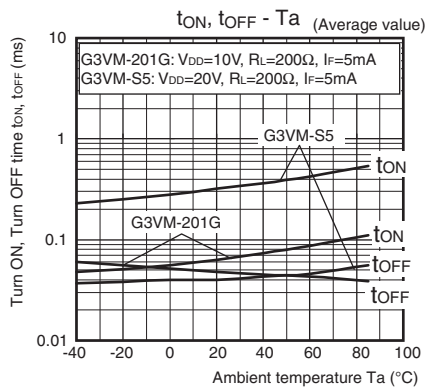


G3VM-201G1/201G2

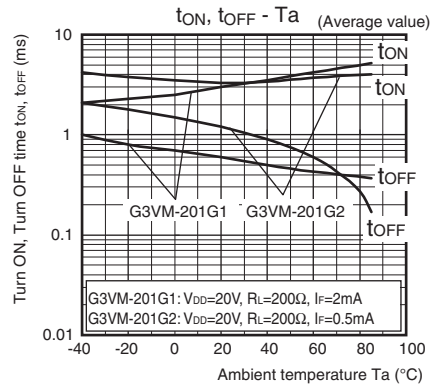

● Current leakage vs. Ambient temperature

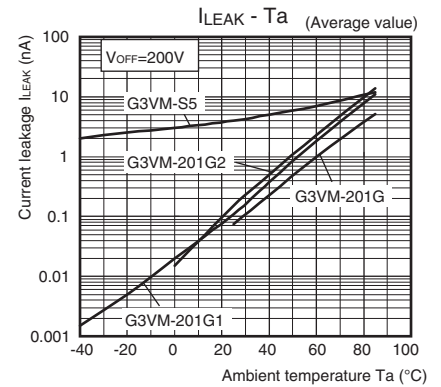

● Current leakage vs. Load voltage G3VM-201G2

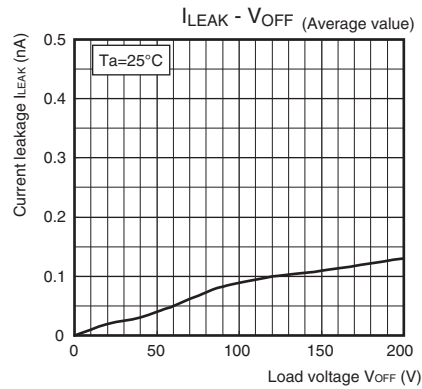


■Appearance / Terminal Arrangement / Internal Connections

●Appearance


SOP (Small Outline Package)

SOP 4-pin

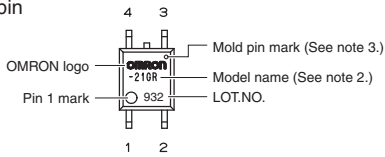

- Note: 1.** The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


●Terminal Arrangement/Internal Connections (Top View)




■Dimensions (Unit: mm)

Surface-mounting Terminals

Weight: 0.1 g

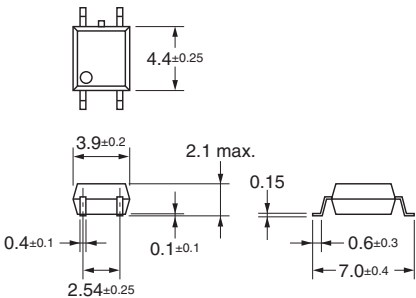

Actual Mounting Pad Dimensions (Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

| Approved Standards | Contact form | File No. |
|--------------------|--------------|----------|
| UL (recognized) | 1a (SPST-NO) | E80555 |

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[G3VM-201G1](#)