

# MOSFET – N-Channel Shielded Gate POWERTRENCH®

150 V, 2 A, 236 m $\Omega$ 

## **FDT86246**

### **Description**

This N-Channel MOSFET is produced using Fairchild onsemi advanced PowerTrench® Process that has been optimized for  $R_{DS(on)}$ , switching performance and ruggedness.

#### **Features**

- Max  $R_{DS(on)} = 236 \text{ m}\Omega$  at  $V_{GS} = 10 \text{ V}$ ,  $I_D = 2 \text{ A}$
- Max  $R_{DS(on)} = 329 \text{ m}\Omega$  at  $V_{GS} = 6 \text{ V}$ ,  $I_D = 1.7 \text{ A}$
- High Performance Trench Technology for Extremely Low R<sub>DS(on)</sub>
- High Power and Current Handling Capability in a Widely Used Surface Mount Package
- Fast Switching Speed
- 100% UIL Tested
- These Devices are Pb-Free and are RoHS Compliant

#### **Typical Applications**


- Load Switch
- Primary Switch

### **MOSFET Maximum Ratings** $T_A = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Ratings	Unit	
V <sub>DS</sub>	Drain to Source Voltage 150			
V <sub>GS</sub>	Gate to Source Voltage ±20			
I <sub>D</sub>	Drain Current -Continuous (Note 1a)	2	Α	
	-Pulsed	8		
E <sub>AS</sub>	Single Pulse Avalanche Energy (Note 3)	8	mJ	
P <sub>D</sub>	Power Dissipation (Note 1a)	2.2	W	
	Power Dissipation (Note 1b)	1.0		
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Temperature Range	-55 to +150	°C	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

SOT-223 CASE 318H



#### **MARKING DIAGRAM**



Z = Assembly Plan Code XY = Date Code (Year & week) 86246 = Specific Device Code

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
FDT86246	SOT-223 (Pb-Free)	4000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, <a href="mailto:BRD8011/D">BRD8011/D</a>.

### THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Unit
$R_{ heta JC}$	Thermal Resistance, Junction to Case (Note 1)	12	°C/W
$R_{ heta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	55	

### FDT86246

### **ELECTRICAL CHARACTERISTICS** T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
Off Characteristic	cs .		•		•	
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$	150	-	-	V
$\frac{\Delta \text{BV}_{\text{DSS(th)}}}{\Delta \text{T}_{\text{J}}}$	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> = 250 μA, referenced to 25°C	-	104	-	mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 120 V, V <sub>GS</sub> = 0 V	-	-	1	μΑ
I <sub>GSS</sub>	Gate to Source Leakage Current	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$	-	-	±100	nA
On Characteristic	cs					
$V_{GS(th)}$	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}$ , $I_D = 250 \mu A$	2.0	3.1	4.0	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	$I_D$ = 250 μA, referenced to 25°C	-	-9	-	mV/°C
R <sub>DS(on)</sub>	Static Drain to Source On Resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 2 A	-	194	236	mΩ
		V <sub>GS</sub> = 6 V, I <sub>D</sub> = 1.7 A	-	231	329	
		$V_{GS} = 10 \text{ V}, I_D = 2 \text{ A}, T_J = 125^{\circ}\text{C}$	-	349	425	
9 <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> = 10 V, I <sub>D</sub> = 2 A	-	5	_	S
Oynamic Charac	teristics	•				
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 75 V, V <sub>GS</sub> = 0 V, f =1 MHz	-	161	215	pF
C <sub>oss</sub>	Output Capacitance		-	21	30	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	1.6	5	pF
R <sub>g</sub>	Gate Resistance		-	0.9	-	Ω
Switching Chara	cteristics					
t <sub>d(on)</sub>	Turn-On Delay Time	V <sub>DD</sub> = 75 V, I <sub>D</sub> = 2 A,	-	7.8	16	ns
t <sub>r</sub>	Rise Time	$V_{GS}$ = 10 V, $R_{GEN}$ = 6 $\Omega$	_	2.3	10	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		-	4.6	10	ns
t <sub>f</sub>	Fall Time		_	1.2	10	ns
Q <sub>g(TOT)</sub>	Total Gate Charge	V <sub>GS</sub> = 0 V to 10 V,	-	2.9	4	nC
Q <sub>g(TOT)</sub>	Total Gate Charge	V <sub>GS</sub> = 0 V to 5 V	_	1.7	3	-
Q <sub>gs</sub>	Total Gate Charge	V <sub>DD</sub> = 75 V, I <sub>D</sub> = 2 A	-	0.9	-	nC
Q <sub>gd</sub>	Gate to Drain "Miller" Charge		_	0.8	-	nC

#### FDT86246


### **ELECTRICAL CHARACTERISTICS** (continued) $T_A = 25^{\circ}C$ unless otherwise noted


Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
Drain-Source Dio	Drain-Source Diode Characteristics					
V <sub>SD</sub>	Source to Drain Diode Forward Voltage	V <sub>GS</sub> = 0 V, I <sub>S</sub> = 2 A (Note 2)	-	0.84	1.3	V
t <sub>rr</sub>	Reverse Recovery Time	$I_F = 2 \text{ A}, \text{ di/dt} = 100 \text{ A/}\mu\text{s}$	-	44	71	ns
Q <sub>rr</sub>	Reverse Recovery Charge		1	31	49	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### NOTES:

1.  $R_{\theta JA}$  is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta CA}$  is determined by the user's board design.






b) 118 °C/W when mounted on a minimum pad of 2 oz copper

- 2. Pulse Test : Pulse Width < 300  $\mu s$ , Duty Cycle < 2.0% 3. Starting T  $_J$  = 25 °C; N–ch: L = 1.0 mH, I  $_{AS}$  = 4.0 A, V  $_{DD}$  = 135 V, V  $_{GS}$  = 10 V.

### TYPICAL CHARACTERISTICS T., = 25°C UNLESS OTHERWISE NOTED

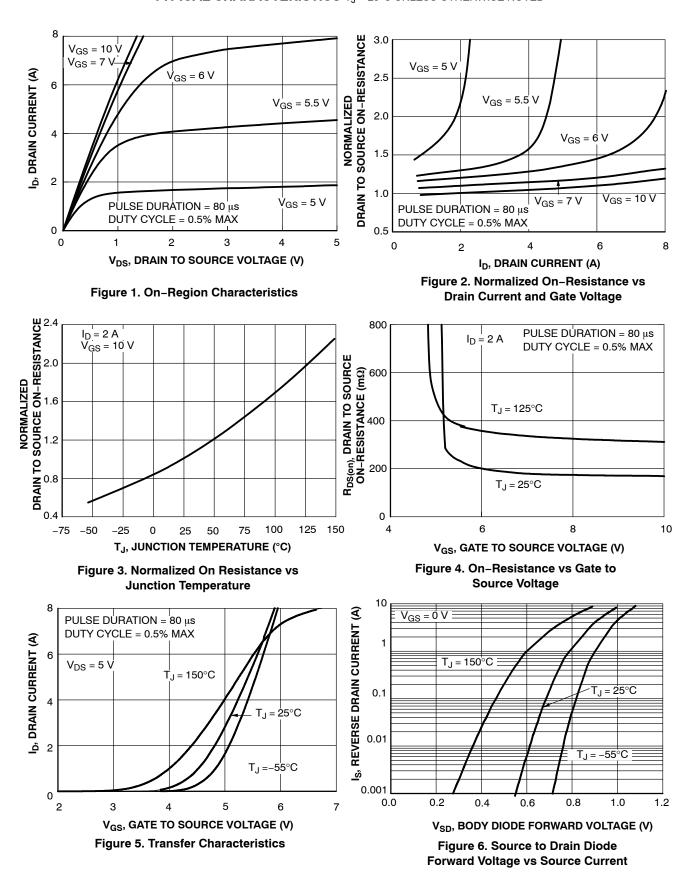

### TYPICAL CHARACTERISTICS (CONTINUED) T, = 25°C UNLESS OTHERWISE NOTED

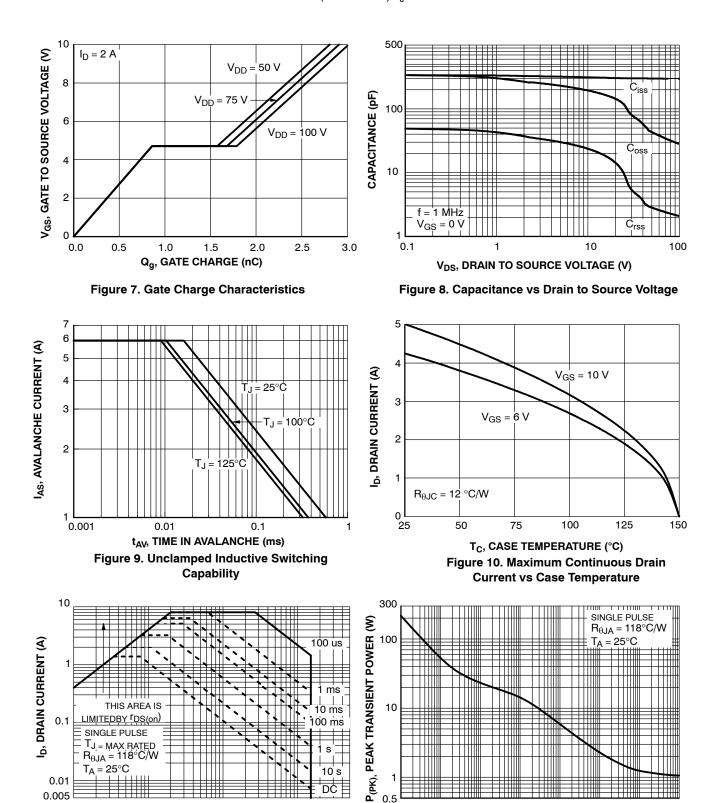


Figure 11. Forward Bias Safe Operating Area Figure 12. Single Pulse Maximum Power Dissipation

10<sup>-4</sup>

10<sup>-3</sup>

 $10^{-1}$ t, PULSE WIDTH (sec) 100

1000

500

0.005

0.1

10

V<sub>DS</sub>, DRAIN to SOURCE VOLTAGE (V)

### FDT86246

### **TYPICAL CHARACTERISTICS** (CONTINUED) $T_J = 25^{\circ}C$ UNLESS OTHERWISE NOTED


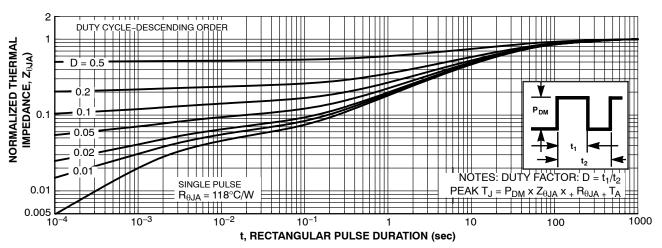


Figure 13. Junction-to-Ambient Transient Thermal Response Curve



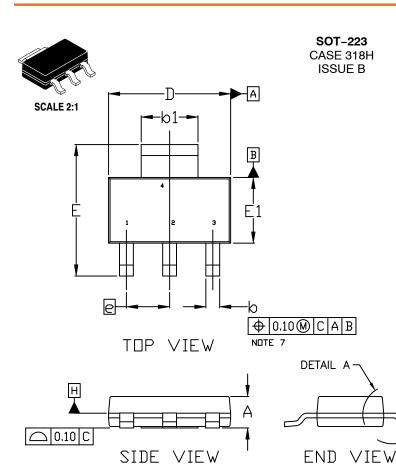


**DATE 13 MAY 2020** 

#### NUTES:

- DIMENSIONING AND TOLERANCING PER ASME
- DIMENSIDNING AND TOLERANCING PER ASME Y14.5M, 2009.
  CONTROLLING DIMENSION: MILLIMETERS DIMENSIONS D & E1 ARE DETERMINED AT DATUM H. DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS DR GATE BURRS. SHALL NOT EXCEED 0.23mm PER SIDE.
  LEAD DIMENSIONS & AND &1 DO NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBBAR PROTRUSION. ALLOWABLE DAMBBAR PROTRUSION IS 0.08mm PER SIDE.
  DATUMS A AND B ARE DETERMINED AT DATUM H. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT OF THE PACKAGE BODY.
  POSITIONAL TOLERANCE APPLIES TO DIMENSIONS & AND &1.


- b AND b1.

	MILLIMETERS			
DIM	MIN.	N□M.	MAX.	
Α			1.80	
A1	0.02	0.06	0.11	
b	0.60	0.74	0.88	
b1	2.90	3.00	3.10	
С	0.24		0.35	
D	6.30	6.50	6.70	
E	6.70	7.00	7.30	
E1	3.30	3.50	3.70	
е	2.30 BSC			
L	0.25			
Ż	0*		10°	



### **GENERIC MARKING DIAGRAM\***

A1



= Assembly Location

Υ = Year

DETAIL A

W = Work Week

XXXXX = Specific Device Code

= Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

### RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the IN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

DOCUMENT NUMBER:	98ASH70634A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SOT-223		PAGE 1 OF 1	

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

FDT86246