

# 74LVC07A

## Low-Voltage CMOS Hex Buffer with Open Drain Outputs

### With 5 V – Tolerant Inputs

The 74LVC07A is a high performance hex buffer operating from a 1.2 V to 5.5 V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers. These LVC devices have open drain outputs which provide the ability to set output levels, or do active-HIGH AND or active-LOW OR functions. A  $V_I$  specification of 5.5 V allows 74LVC07A inputs to be safely driven from 5.0 V devices.

#### Features

- Designed for 1.2 V to 5.5 V  $V_{CC}$  Operation
- 5.0 V Tolerant Inputs/Outputs
- LVTTTL Compatible
- LVC MOS Compatible
- 24 mA Output Sink Capability
- Near Zero Static Supply Current (10  $\mu$ A) Substantially Reduces System Power Requirements
- Latchup Performance Exceeds 250 mA
- Wired-OR, Wired-AND
- Output Level Can Be Set Externally Without Affecting Speed of Device
- ESD Performance: Human Body Model >2000 V;  
Machine Model >200 V
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

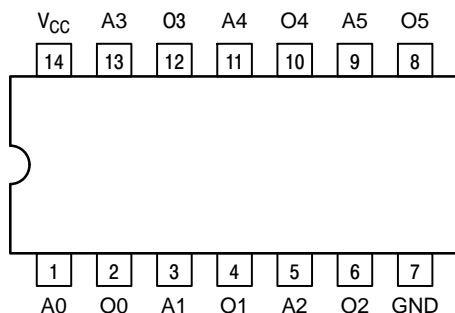



Figure 1. Pinout: 14-Lead (Top View)



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

#### MARKING DIAGRAMS

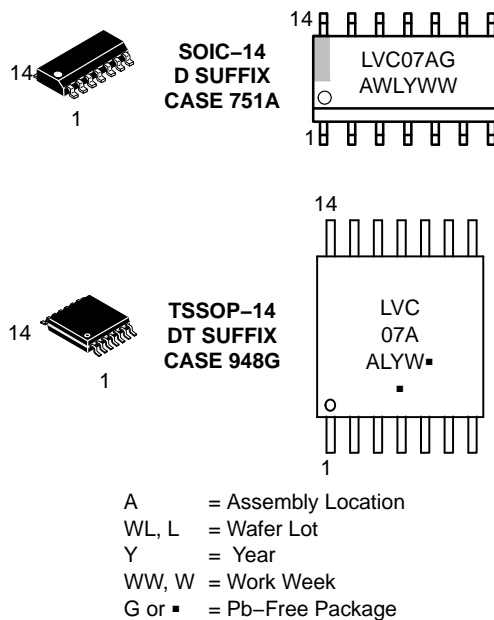

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

## 74LVC07A

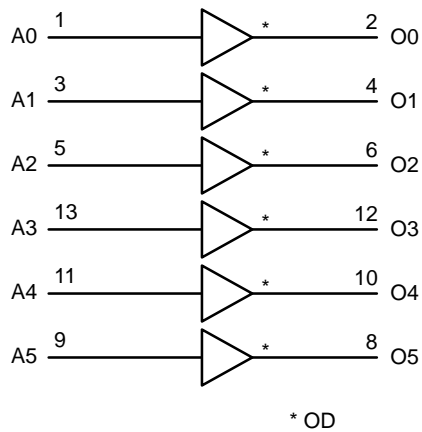


Figure 2. Logic Diagram

Table 1. PIN NAMES

Pins	Function
An	Data Inputs
On	Outputs

Table 2. TRUTH TABLE

An	On
L	L
H	Z

### MAXIMUM RATINGS

Symbol	Parameter	Value	Condition	Unit
$V_{CC}$	DC Supply Voltage	-0.5 to +6.5		V
$V_I$	DC Input Voltage	$-0.5 \leq V_I \leq +6.5$		V
$V_O$	DC Output Voltage	$-0.5 \leq V_O \leq +6.5$	Output in 3-State	V
		$-0.5 \leq V_O \leq V_{CC} + 0.5$	Output in HIGH or LOW State (Note 1)	
$I_{IK}$	DC Input Diode Current	-50	$V_I < GND$	mA
$I_{OK}$	DC Output Diode Current	-50	$V_O < GND$	mA
		+50	$V_O > V_{CC}$	mA
$I_O$	DC Output Source/Sink Current	$\pm 50$		mA
$I_{CC}$	DC Supply Current Per Supply Pin	$\pm 100$		mA
$I_{GND}$	DC Ground Current Per Ground Pin	$\pm 100$		mA
$T_{STG}$	Storage Temperature Range	-65 to +150		°C
$T_L$	Lead Temperature, 1 mm from Case for 10 Seconds	$T_L = 260$		°C
$T_J$	Junction Temperature Under Bias	$T_J = 135$		°C
$\theta_{JA}$	Thermal Resistance (Note 2)	SOIC = 85 TSSOP = 100		°C/W
MSL	Moisture Sensitivity		Level 1	
$I_{LATCHUP}$	Latch-up Performance at $V_{CC} = 3.6$ V and 125°C (Note 3)		$\pm 250$	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- $I_O$  absolute maximum rating must be observed.
- Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow.
- Tested to EIA/JES078.

### ORDERING INFORMATION

Device	Package	Shipping†
74LVC07ADR2G	SOIC-14 (Pb-Free)	2500 / Tape & Reel
74LVC07ADTR2G	TSSOP-14 (Pb-Free)	2500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# 74LVC07A

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Typ	Max	Unit
$V_{CC}$	Supply Voltage Operating Functional	1.65 1.2		5.5 5.5	V
$V_I$	Input Voltage	0		5.5	V
$V_O$	Output Voltage Active Mode 3-State	0 0		$V_{CC}$ 5.5	V
$I_{OL}$	LOW Level Output Current $V_{CC} = 4.5\text{ V} - 5.5\text{ V}$ $V_{CC} = 3.0\text{ V} - 3.6\text{ V}$ $V_{CC} = 2.7\text{ V} - 3.0\text{ V}$ $V_{CC} = 2.3\text{ V} - 2.7\text{ V}$			+32 +24 +12 +8	mA
$T_A$	Operating Free-Air Temperature	-40		+125	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate $V_{CC} = 1.65\text{ to }2.7\text{ V}$ $V_{CC} = 2.7\text{ to }5.5\text{ V}$	0 0		20 10	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

## DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	-40 to +85°C			-40 to +125°C			Unit
			Min	Typ (Note 4)	Max	Min	Typ (Note 4)	Max	
$V_{IH}$	HIGH-level input voltage	$V_{CC} = 1.2\text{ V}$	1.08	—	—	1.08	—	—	V
		$V_{CC} = 1.65\text{ V to }1.95\text{ V}$	$0.65 \times V_{CC}$	—	—	$0.65 \times V_{CC}$	—	—	
		$V_{CC} = 2.3\text{ V to }2.7\text{ V}$	1.7	—	—	1.7	—	—	
		$V_{CC} = 2.7\text{ V to }3.6\text{ V}$	2.0	—	—	2.0	—	—	
		$V_{CC} = 4.5\text{ V to }5.5\text{ V}$	$0.7 \times V_{CC}$	—	—	$0.7 \times V_{CC}$	—	—	
$V_{IL}$	LOW-level input voltage	$V_{CC} = 1.2\text{ V}$	—	—	0.12	—	—	0.12	V
		$V_{CC} = 1.65\text{ V to }1.95\text{ V}$	—	—	$0.35 \times V_{CC}$	—	—	$0.35 \times V_{CC}$	
		$V_{CC} = 2.3\text{ V to }2.7\text{ V}$	—	—	0.7	—	—	0.7	
		$V_{CC} = 2.7\text{ V to }3.6\text{ V}$	—	—	0.8	—	—	0.8	
		$V_{CC} = 4.5\text{ V to }5.5\text{ V}$	—	—	$0.3 \times V_{CC}$	—	—	$0.3 \times V_{CC}$	
$V_{OL}$	LOW-level output voltage	$V_I = V_{IH}\text{ or }V_{IL}$	—	—	—	—	—	—	V
		$I_O = 100\text{ }\mu\text{A}; V_{CC} = 1.65\text{ V to }3.6\text{ V}$	—	—	0.2	—	—	0.3	
		$I_O = 4\text{ mA}; V_{CC} = 1.65\text{ V}$	—	—	0.45	—	—	0.65	
		$I_O = 8\text{ mA}; V_{CC} = 2.3\text{ V}$	—	—	0.6	—	—	0.8	
		$I_O = 12\text{ mA}; V_{CC} = 2.7\text{ V}$	—	—	0.4	—	—	0.6	
		$I_O = 24\text{ mA}; V_{CC} = 3.0\text{ V}$	—	—	0.55	—	—	0.8	
		$I_O = 32\text{ mA}; V_{CC} = 4.5\text{ V}$	—	—	0.55	—	—	0.8	
$I_I$	Input leakage current	$V_I = 5.5\text{ V or GND}$ $V_{CC} = 1.65\text{ to }5.5\text{ V}$	—	$\pm 0.1$	$\pm 5$	—	$\pm 0.1$	$\pm 20$	$\mu\text{A}$
$I_{OZ}$	OFF-state output current	$V_I = V_{IH}; V_O = 5.5\text{ V or GND};$ $V_{CC} = 1.65\text{ to }5.5\text{ V}$	—	$\pm 0.1$	$\pm 5$	—	$\pm 0.1$	$\pm 20$	$\mu\text{A}$
$I_{OFF}$	Power-off leakage current	$V_I\text{ or }V_O = 5.5\text{ V}; V_{CC} = 0\text{ V}$	—	$\pm 0.1$	$\pm 10$	—	$\pm 0.1$	$\pm 20$	$\mu\text{A}$

4. All typical values are measured at  $T_A = 25^\circ\text{C}$  and  $V_{CC} = 3.3\text{ V}$ , unless stated otherwise.

# 74LVC07A

## DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	-40 to +85°C			-40 to +125°C			Unit
			Min	Typ (Note 4)	Max	Min	Typ (Note 4)	Max	
I <sub>CC</sub>	Supply current	V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 5.5 V	–	0.1	10	–	0.1	40	μA
ΔI <sub>CC</sub>	Additional supply current	per input pin; V <sub>I</sub> = V <sub>CC</sub> – 0.6 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 2.7 V to 5.5 V	–	5	500	–	5	5000	μA

4. All typical values are measured at T<sub>A</sub> = 25°C and V<sub>CC</sub> = 3.3 V, unless stated otherwise.

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## AC ELECTRICAL CHARACTERISTICS (t<sub>R</sub> = t<sub>F</sub> = 2.5 ns)

Symbol	Parameter	Conditions	-40 to +85°C			-40 to +125°C			Unit
			Min	Typ (Note 5)	Max	Min	Typ (Note 5)	Max	
t <sub>pZL</sub>	OFF-state to LOW propagation delay An to On	V <sub>CC</sub> = 1.2 V	–	8.0	–	–	–	–	ns
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.5	1.7	5.5	0.5	–	6.5	
		V <sub>CC</sub> = 2.3 V to 2.7 V	0.5	1.2	2.8	0.5	–	3.5	
		V <sub>CC</sub> = 2.7 V	0.5	1.8	3.3	0.5	–	4.5	
		V <sub>CC</sub> = 3.0 V to 3.6 V	0.5	1.2	3.6	0.5	–	4.5	
		V <sub>CC</sub> = 4.5 V to 5.5 V	0.5	1.6	2.6	0.5	–	3.5	
t <sub>pLZ</sub>	LOW to OFF-state propagation delay An to On	V <sub>CC</sub> = 1.2 V	–	10.0	–	–	–	–	ns
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.5	3.0	5.5	0.5	–	6.5	
		V <sub>CC</sub> = 2.3 V to 2.7 V	0.5	1.7	2.8	0.5	–	3.5	
		V <sub>CC</sub> = 2.7 V	0.5	2.1	3.3	0.5	–	4.5	
		V <sub>CC</sub> = 3.0 V to 3.6 V	0.5	2.5	3.6	0.5	–	4.5	
		V <sub>CC</sub> = 4.5 V to 5.5 V	0.5	1.6	2.6	–	–	3.5	

5. Typical values are measured at T<sub>A</sub> = 25°C and V<sub>CC</sub> = 3.3 V, unless stated otherwise.

## DYNAMIC SWITCHING CHARACTERISTICS

Symbol	Characteristic	Condition	Min	Typ	Max	Unit
V <sub>OLP</sub>	Dynamic LOW Peak Voltage (Note 6)	V <sub>CC</sub> = 3.3 V, C <sub>L</sub> = 50 pF, V <sub>IH</sub> = 3.3 V, V <sub>IL</sub> = 0 V V <sub>CC</sub> = 2.5 V, C <sub>L</sub> = 30 pF, V <sub>IH</sub> = 2.5 V, V <sub>IL</sub> = 0 V		0.8 0.6		V
V <sub>OLV</sub>	Dynamic LOW Valley Voltage (Note 6)	V <sub>CC</sub> = 3.3 V, C <sub>L</sub> = 50 pF, V <sub>IH</sub> = 3.3 V, V <sub>IL</sub> = 0 V V <sub>CC</sub> = 2.5 V, C <sub>L</sub> = 30 pF, V <sub>IH</sub> = 2.5 V, V <sub>IL</sub> = 0 V		–0.8 –0.6		V


6. Number of outputs defined as “n”. Measured with “n–1” outputs switching from HIGH-to-LOW or LOW-to-HIGH. The remaining output is measured in the LOW state.

## CAPACITIVE CHARACTERISTICS (T<sub>A</sub> = +25°C)

Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 3.3 V, V <sub>I</sub> = 0 V or V <sub>CC</sub>	5.0	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = 3.3 V, V <sub>I</sub> = 0 V or V <sub>CC</sub>	6.0	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 7)	Per input; V <sub>I</sub> = GND or V <sub>CC</sub>		pF
		V <sub>CC</sub> = 1.65 V to 1.95 V	6.5	
		V <sub>CC</sub> = 2.3 V to 2.7 V	6.9	
		V <sub>CC</sub> = 3.0 V to 3.6 V	7.2	

7. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW)  
 $P_D = C_{PD} \cdot V_{CC}^2 \times f_i \cdot N + L (C_L \times V_{CC}^2 \times f_o)$  where:  
 f<sub>i</sub> = input frequency in MHz; f<sub>o</sub> = output frequency in MHz  
 C<sub>L</sub> = output load capacitance in pF V<sub>CC</sub> = supply voltage in Volts  
 N = number of outputs switching L (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup>)

## 74LVC07A

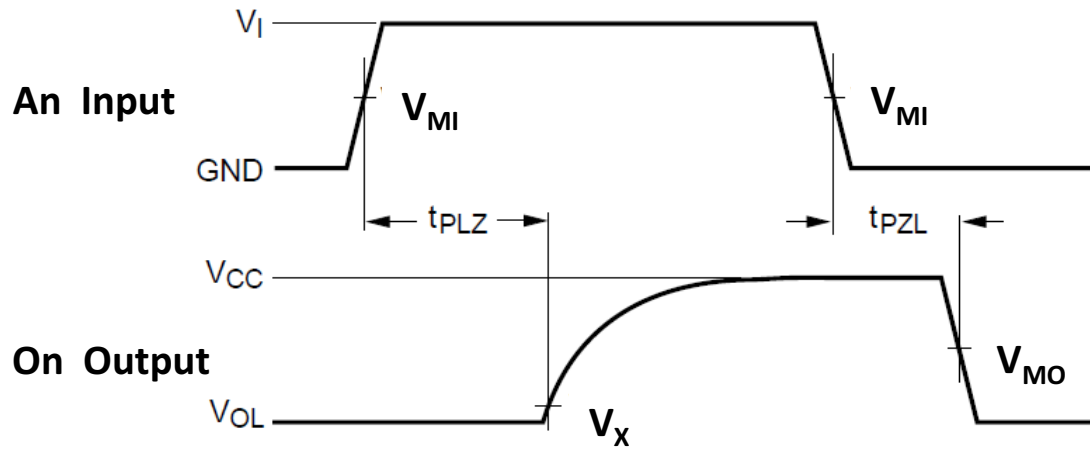


### PROPAGATION DELAYS

$t_R = t_F = 2.5 \text{ ns}$ , 10% to 90%;  $f = 1 \text{ MHz}$ ;  $t_W = 500 \text{ ns}$

**Table 3. AC WAVEFORMS**

Symbol	$V_{CC}$		
	$V_{CC} \geq 4.5 \text{ to } 5.5 \text{ V}$	$V_{CC} \geq 2.7 \text{ to } 3.6 \text{ V}$	$V_{CC} < 2.7 \text{ V}$
$V_{MI}$	$V_{CC} / 2$	1.5 V	$V_{CC} / 2$
$V_{MO}$	$V_{CC} / 2$	1.5 V	$V_{CC} / 2$
$V_X$	$V_{OL} + 0.3 \text{ V}$	$V_{OL} + 0.3 \text{ V}$	$V_{OL} + 0.15 \text{ V}$

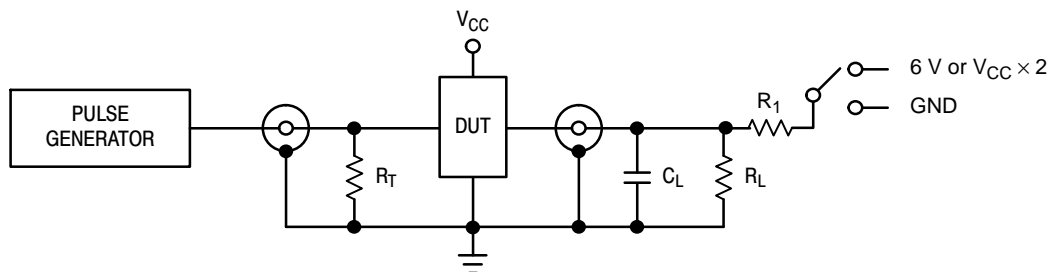

$C_L$  includes jig and probe capacitance  
 $R_T = Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )  
 $R_1 = R_L$

**Table 4. TEST CIRCUIT**

Supply Voltage	Input		Load		$V_{EXT}$		
$V_{CC} \text{ (V)}$	$V_I$	$t_r, t_f$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$	$t_{PLZ}, t_{PZL}$	$t_{PHZ}, t_{PZH}$
1.2	$V_{CC}$	$\leq 2 \text{ ns}$	30 pF	1 k $\Omega$	Open	$2 \times V_{CC}$	GND
1.65 – 1.95	$V_{CC}$	$\leq 2 \text{ ns}$	30 pF	1 k $\Omega$	Open	$2 \times V_{CC}$	GND
2.3 – 2.7	$V_{CC}$	$\leq 2 \text{ ns}$	30 pF	500 $\Omega$	Open	$2 \times V_{CC}$	GND
2.7	2.7 V	$\leq 2.5 \text{ ns}$	50 pF	500 $\Omega$	Open	$2 \times V_{CC}$	GND
3.0 – 3.6	2.7 V	$\leq 2.5 \text{ ns}$	50 pF	500 $\Omega$	Open	$2 \times V_{CC}$	GND
4.5 to 5.5	$V_{CC}$	$\leq 2.5 \text{ ns}$	50 pF	500 $\Omega$	Open	$2 \times V_{CC}$	GND

# 74LVC07A


## PACKAGE DIMENSIONS

TSSOP-14

DT SUFFIX

CASE 948G

ISSUE B

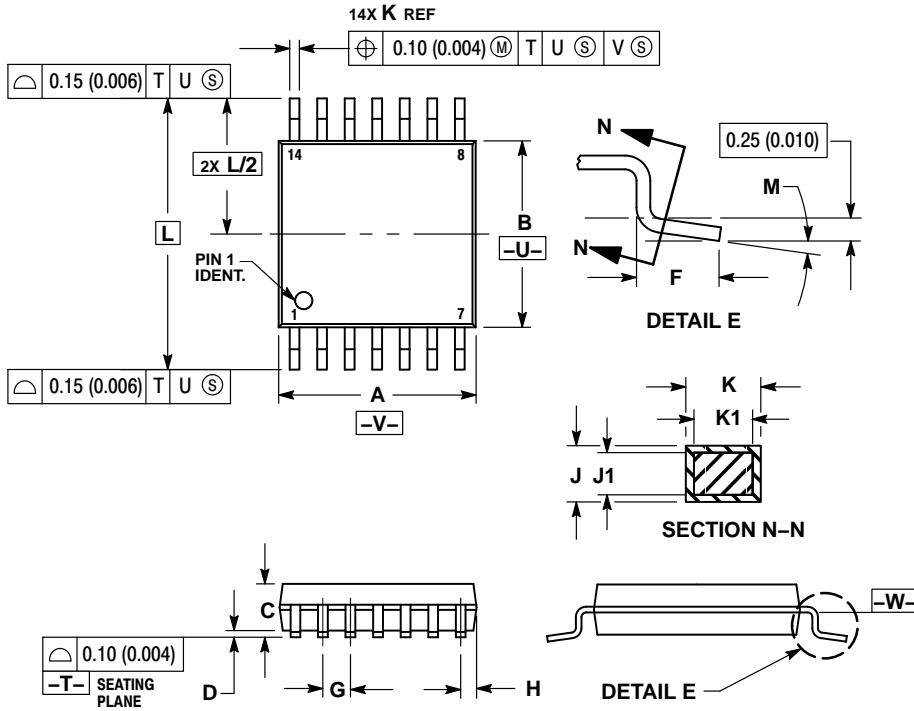


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	---	1.20	---	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.50	0.60	0.020	0.024
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

### SOLDERING FOOTPRINT\*

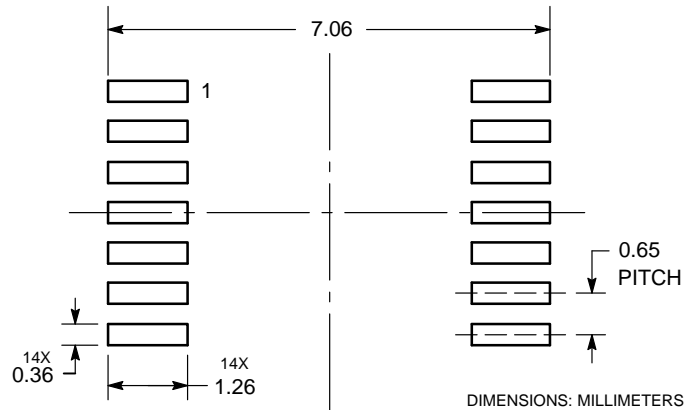

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[74LVC07ADTR2G](#) [74LVC07ADR2G](#)