



PSL-BT-24600-G31

Rechargeable Lithium Battery **24V 60AH 1536Wh**
 PSL BT – Bluetooth Series **LiFePO4**

FEATURES

- Super safe lithium iron phosphate (LiFePO4) chemistry reducing the risk of explosion or combustion due to high impact, over-charging, or short circuit condition
- Battery Management System (BMS) controlling the parameters of the battery to provide optimum safety by protecting against over-charging and over-discharging
- BMS multi-function design balances the battery cells optimizing battery performance
- Delivers twice the power of lead acid batteries (even at high discharge rates) while maintaining constant power
- Faster charging and lower self-discharge
- Up to 10 times more cycles than lead acid batteries
- Compact and only 40% of the weight of comparable lead acid batteries
- Rugged impact resistant case

BLUETOOTH® SERIES

Combining proven lithium technology with an intelligent battery management system (BMS), the Power Sonic PSL-BT range delivers a lithium battery that lasts longer, weighs less and charges quicker than the equivalent lead acid battery.

At the heart of every Power Sonic PSL-BT lithium battery is an intelligent BMS that monitors and reacts to multiple voltage, current, and temperature events to maximize performance, battery life, and safety. With its advanced BMS design, the PSL-BT range can be configured with four batteries in series or in parallel connections providing a solution for high voltage or capacity applications.

GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
 365 Cabela Dr Suite 300,
 Verdi, Nevada 89439
 USA
T: +1 775 824 6500
E: customer-service@power-sonic.com

POWER-SONIC EMEA (EMEA – EUROPE, MIDDLE EAST AND AFRICA)



Smitspol 4, 3861 RS Nijkerk,
 The Netherlands
T NL: + 31 33 7410 700
T UK: + 44 1268 560 686
T FR: + 33 344 32 18 17
E: salesEMEA@power-sonic.com

*PLEASE CONTACT POWER-SONIC TO CONNECT MORE THAN FOUR BATTERIES IN PARALLEL
 To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.
 © 2019. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners.
 All data subject to change without notice. E&O.E

PERFORMANCE SPECIFICATIONS



| | |
|---|----------------------------|
| Nominal Voltage | 25.6 V |
| Nominal Capacity | 60 AH |
| Stored Energy | 1536 Wh |
| Dimensions | |
| Length (+/-2mm) | 13.0" (330 mm) |
| Width (+/-2mm) | 6.8" (172 mm) |
| Total Height (+/-4mm) | 8.8" (223 mm) |
| Minimum Weight | 33.3 lbs (15.10 kg) |
| Internal Resistance | TBD mΩ |
| Max Continuous Discharge Current | 60.0 A |
| Charge Cut-off Voltage | 29.2 V |
| Number of Series Cells | 8 |
| Recommended Charge Current | 15.0 A - 30.0 A |
| Recommended Discharge Cut-Off Voltage | 22 V |
| Cycle Charge (Initial Current ≤ 0.25C) | 28.8 V – 29.2 V |
| Cycle Life (@100% Depth of Discharge) | 2000 |
| Series Connection | No Series Connections |
| Parallel Connection | Four Parallel Connections* |
| Operating Temperature | |
| Charge | 0 to 55 °C |
| Discharge | -30 to 55 °C |
| Case | ABS |

DIMENSIONS



TERMINALS:

M8: Threaded insert with 8mm stud fastener




Torque: 11.0~14.7 Nxm




PSL-BT-24600-G31

Rechargeable Lithium Battery **24V 60AH 1536Wh**
PSL BT – Bluetooth Series **LiFePO4**

VOLTAGE PROFILES AT VARIOUS DISCHARGE RATES
25°C AMBIENT TEMPERATURE

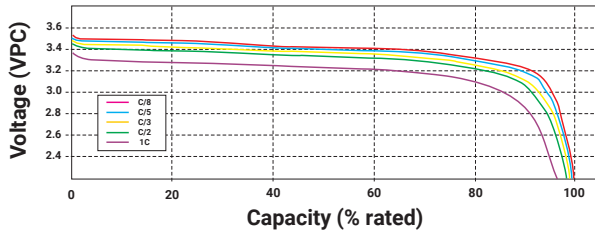

YEARS OF SERVICE LIFE
ONE CYCLE PER DAY @25°C

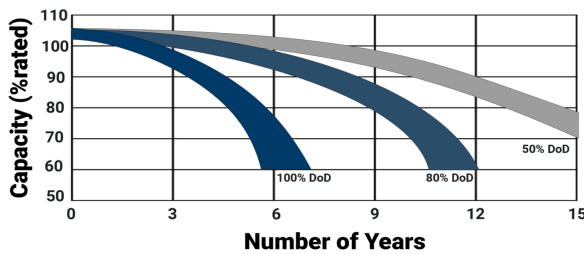

CHARGING

Cycle Applications: Apply constant voltage charge at 3.45 – 3.65 volts per cell at 20°C. Initial charging current should be set at less than C/4 Amps. Switch to float charge to avoid overcharging.

“Float” or “Stand-By” Service: Apply constant voltage charge of 3.35 – 3.40 volts per cell at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

APPLICATION

- Trolling
- Golf Cart
- Marine
- Home Energy
- Sports & Recreation
- Mobility


GLOBAL HEADQUARTERS (USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation
365 Cabela Dr Suite 300,
Verdi, Nevada 89439 USA
T: +1 619 661 2020
E: customer-service@power-sonic.com


POWER-SONIC EMEA (EMEA – EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk,
The Netherlands
T NL: +31 33 7410 700
T UK: +44 1268 560 686
T FR: +33 344 32 18 17
E: salesEMEA@power-sonic.com

VOLTAGE PROFILES AT VARIOUS AMBIENT TEMPERATURES
C/2 DISCHARGE RATE

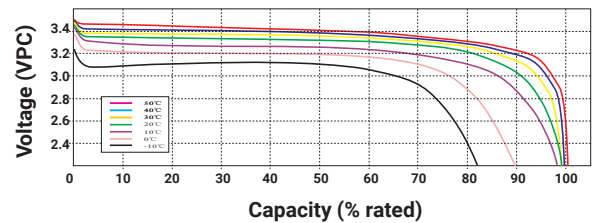

CHARGING CHARACTERISTICS @ C/2 AND 25°C

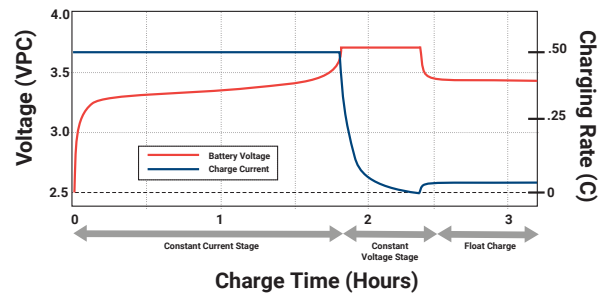

APPROVALS

- UN 38.3 certified
- UL 1642 cell certificate
- IEC 62133 cell certificate



FURTHER INFORMATION

Please refer to our website www.power-sonic.com or email us at technical-support@power-sonic.com for a complete range of useful downloads such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Power-Sonic:](#)

[PSL-BT-24600-G31](#)