SMT Power Inductors

Power Beads - PA2983.XXXHL Series




- **Current Rating:** Over 52Apk
- Inductance Range: 23nH to 65nH
- **Height:** 4.0mm Max
- 🕒 Footprint: 4.0mm x 5.0mm Max
- 📭 Halogen Free

Electrical Specifications @ 25°C – Operating Temperature –40°C to +125°C								
Part	Inductance ¹	Inductance	lrated ²	DCR ³	Saturation Current ⁴ (A TYP)		Heating Current ⁵	
Number	@ 0A bc (nH +/- 15%)	@ Irated (nH TYP)	(Adc)	(m Ω nominal)	25°C	100°C	(A TYP)	
PA2983.230HLT	23	23	30	0.33+/- 10%	75+	52	30	
PA2983.650HLT	65	60	24	0.33 +/- 10%	29.5	24	30	


Notes:

- 1. Inductance is measured at 100kHz, 100mVrms.
- 2. The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- 3. The nominal DCR is measured from point (a) to (b) , as shown below on the mechanical drawing.
- 4. The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C, 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- 5. The heating current is the DC current which causes the part temperature to increase by approximately 40°C when used in a typical application.
- 6. In high volt*time applications, additional heating in the component can occure due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- 7. The "T" suffix indicates the part is shipped in tape and reel packaging. Pulse complies to the industry standard type and reel specification EIA481. The tape and reel for this product has a width (W=12mm), pitch (Po=0.8mm) and depth (Ko=12mm).
- 8. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

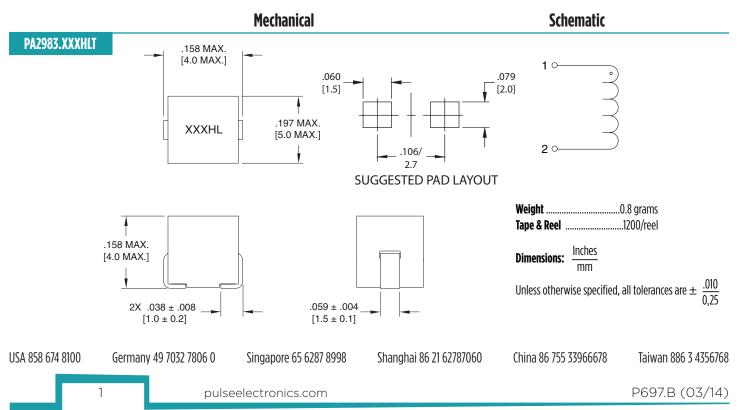

SMT Power Inductors

Power Beads - PA2983.XXXHL Series

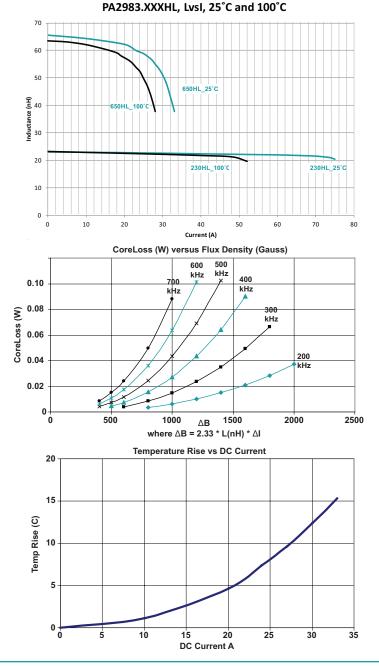

For More Information

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 U.S.A.	Pulse Europe Einsteinstrasse 1 D-71083 Herren- berg Germany
Tel: 858 674 8100	Tel: 49 7032 7806
Fax: 858 674 8262	Fax: 49 7032 780

60)6 135

Pulse China Headquarters B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Road High-Tech Zone Nanshan District Shenzen, PR China 518057 Tel: 86 755 33966678 Fax: 86 755 33966700

Pulse North China Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Road West Shanghai 200336 China

Tel: 86 21 62787060

Fax: 86 2162786973

Pulse South Asia 135 Joo Seng Road #03-02 PM Industrial Bldg. Singapore 368363

Tel: 65 6287 8998 Fax: 65 6287 8998

Pulse North Asia

3F, No. 198 Zhongyuan Road Zhongli City Taoyuan County 320 Taiwan R. O. C. Tel: 886 3 4356768 Fax: 886 3 4356823 (Pulse) Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.

2

pulseelectronics.com

P697.B (03/14)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: PA2983.230HLT