

# RRL025P03FRA

## Pch -30V -2.5A Power MOSFET

$V_{DSS}$	-30V
R <sub>DS(on)</sub> (Max.)	75m $Ω$
I <sub>D</sub>	-2.5A
$P_{D}$	1.0W


#### Features

- 1) Low on resistance.
- 2) Built-in G-S Protection Diode.
- 3) Small Surface Mount Package (TUMT6).
- 4) Pb-free lead plating; RoHS compliant
- 5) AEC-Q101 Qualified

## Application


DC/DC converters

#### Outline



### •Inner circuit

- (1) Drain
- (2) Drain
- (3) Gate
- (4) Source
- (5) Drain
- (6) Drain
- \*1 ESD PROTECTION DIODE
- \*2 BODY DIODE



Packaging specifications

	Packaging	Taping
	Reel size (mm)	180
Type	Tape width (mm)	8
Туре	Basic ordering unit (pcs)	3,000
	Taping code	TR
	Marking	UA

## ● Absolute maximum ratings(T<sub>a</sub> = 25°C)

Parameter	Symbol	Value	Unit
Drain - Source voltage	$V_{ extsf{DSS}}$	-30	V
Continuous drain current	I <sub>D</sub> *1	±2.5	А
Pulsed drain current	I <sub>D,pulse</sub> *2	±10	А
Gate - Source voltage	$V_{GSS}$	±20	V
Power dissipation	P <sub>D</sub> *3	1.0	W
rower dissipation	P <sub>D</sub> *4	0.32	W
Junction temperature	T <sub>j</sub>	150	°C
Range of storage temperature	T <sub>stg</sub>	-55 to +150	°C

## ●Thermal resistance

Parameter	Symbol		Values		Unit
raiametei	Symbol	Min.	Тур.	Max.	Offic
Thermal resistance, junction - ambient	R <sub>thJA</sub> *3	-	-	125	°C/W
Thermal resistance, junction - ambient	R <sub>thJA</sub> *4	-	-	391	°C/W

## •Electrical characteristics( $T_a = 25$ °C)

Parameter	Symbol	Conditions	Values			Unit	
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Offic	
Drain - Source breakdown voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0V$ , $I_D = -1mA$	-30	-	-	V	
Breakdown voltage temperature coefficient	$\frac{\Delta V_{(BR)DSS}}{\Delta T_{j}}$	I <sub>D</sub> = -1mA referenced to 25°C	1	-25	1	mV/°C	
Zero gate voltage drain current	I <sub>DSS</sub>	$V_{DS} = -30V, V_{GS} = 0V$	ı	-	-1	μΑ	
Gate - Source leakage current	$I_{GSS}$	$V_{GS} = \pm 20V, V_{DS} = 0V$	ı	-	±10	μΑ	
Gate threshold voltage V <sub>GS (t</sub>		$V_{DS} = -10V, I_{D} = -1mA$	-1	-	-2.5	V	
Gate threshold voltage temperature coefficient	$\frac{\Delta V_{(GS)th}}{\Delta T_{j}}$	I <sub>D</sub> = -1mA referenced to 25°C	-	3.9	-	mV/°C	
		$V_{GS} = -10V, I_D = -2.5A$	-	55	75		
Static drain - source	<b>5</b> *5	$V_{GS} = -4.5V, I_D = -1.2A$	-	85	115	m()	
on - state resistance	$R_{DS(on)}$	$V_{GS} = -4.0V, I_D = -1.2A$	ı	95	125	mΩ	
		V <sub>GS</sub> = -10V, I <sub>D</sub> = -2.5A, T <sub>j</sub> =125°C	-	95	135		
Gate input resistannce	$R_G$	f = 1MHz, open drain	-	24	-	Ω	
Transconductance	<b>g</b> fs *5	$V_{DS} = -10V, I_{D} = -2.5A$	2.0	4.4	-	S	

2/11

<sup>\*1</sup> Limited only by maximum temperature allowed.

<sup>\*2</sup> Pw  $\leq 10 \mu s, \, Duty \, cycle \leq 1\%$ 

<sup>\*3</sup> Mounted on a seramic board (30×30×0.8mm)

<sup>\*4</sup> Mounted on a FR4 (15×20×0.8mm)

<sup>\*5</sup> Pulsed

## ●Electrical characteristics(T<sub>a</sub> = 25°C)

Parameter	Symbol	Conditions	Values			Unit	
Parameter	Symbol Conditions —		Min.	Тур.	Max.	Offic	
Input capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0V	-	480	-		
Output capacitance	C <sub>oss</sub>	V <sub>DS</sub> = -10V	-	70	-	pF	
Reverse transfer capacitance	$C_{rss}$	f = 1MHz	-	70	-		
Turn - on delay time	t <sub>d(on)</sub> *5	$V_{DD} \simeq -15V$ , $V_{GS} = -10V$	-	7	-		
Rise time	t <sub>r</sub> *5	I <sub>D</sub> = -1.2A	-	16	-	no	
Turn - off delay time	t <sub>d(off)</sub> *5	$R_L = 12.5\Omega$	-	50	-	ns	
Fall time	t <sub>f</sub> *5	$R_G = 10\Omega$	-	33	-		

## •Gate Charge characteristics( $T_a = 25$ °C)

Parameter	Symbol	Conditions	Values			Unit
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Offic
Total gate charge	+-	$V_{DD} \simeq -15V, I_{D} = -2.5A$ $V_{GS} = -5V$	-	5.2	-	
Total gate charge	Q <sub>g</sub> *5	$V_{DD} \simeq -15V, I_D = -2.5A$ $V_{GS} = -10V$	-	12	-	nC
Gate - Source charge	Q <sub>gs</sub> *5	$V_{DD} \simeq -15V, I_D = -2.5A$ $V_{GS} = -5V$	-	1.6	-	
Gate - Drain charge	Q <sub>gd</sub> *5	$V_{GS} = -5V$	-	1.6	-	

## ●Body diode electrical characteristics (Source-Drain)(T<sub>a</sub> = 25°C)

Parameter	Symbol Conditions		Values			Unit
r ai ai ii etei	Symbol	Symbol Conditions -		Тур.	Max.	Offic
Inverse diode continuous, forward current	l <sub>S</sub> *1	T <sub>a</sub> = 25°C	-	-	-0.8	А
Forward voltage	V <sub>SD</sub> *5	$V_{GS} = 0V, I_s = -2.5A$	-	-	-1.2	V

## •Electrical characteristic curves

Fig.1 Power Dissipation Derating Curve






Fig.2 Maximum Safe Operating Area




Drain - Source Voltage : -V<sub>DS</sub> [V]

Fig.3 Normalized Transient Thermal Resistance vs. Pulse Width



Pulse Width: Pw [s]

Fig.4 Single Pulse Maxmum Power dissipation



Pulse Width: P<sub>W</sub> [s]


Peak Transient Power: P(W)

Drain Current: -I<sub>D</sub> [A]

Drain - Source Breakdown Voltage : - $V_{(BR)DSS}$  [V]


### •Electrical characteristic curves

Fig.5 Typical Output Characteristics(I)




Drain - Source Voltage : -V<sub>DS</sub> [V]

Fig.6 Typical Output Characteristics(II)




Drain - Source Voltage : -V<sub>DS</sub> [V]

Fig.7 Breakdown Voltage vs. Junction Temperature



Junction Temperature :  $T_j$  [°C]

Fig.8 Typical Transfer Characteristics



Gate - Source Voltage : -V<sub>GS</sub> [V]

Drain Current: -I<sub>D</sub> [A]

Gate Threshold Voltage: -VGS(th) [V]

### •Electrical characteristic curves

Fig.9 Gate Threshold Voltage vs. Junction Temperature





Fig.10 Transconductance vs. Drain Current



Junction Temperature : T<sub>i</sub> [°C]

Fig.11 Drain CurrentDerating Curve






Fig.12 Static Drain - Source On - State Resistance vs. Gate Source Voltage



Gate - Source Voltage : -V<sub>GS</sub> [V]


#### • Electrical characteristic curves

Fig.13 Static Drain - Source On - State Resistance vs. Drain Current(I)




Drain Current: -ID [A]

Fig.14 Static Drain - Source On - State Resistance vs. Junction Temperature




Junction Temperature : T<sub>i</sub> [°C]

Fig.15 Static Drain - Source On - State Resistance vs. Drain Current(II)



Drain Current : -I<sub>D</sub> [A]

Fig.16 Static Drain-Source On-State Resistance vs. Drain Current(III)



Drain Current : -I<sub>D</sub> [A]

### •Electrical characteristic curves

Fig.17 Static Drain - Source On - State Resistance vs. Drain Current(IV) 1000 Static Drain - Source On-State Resistance  $V_{GS} = -4.0V$ Pulsed T<sub>a</sub>=75°C T<sub>a</sub>=25°C  $T_a = -25^{\circ}C$  $:R_{DS(on)}\left[ m\Omega \right]$ 100 10 0.1 1 10 Drain Current: -ID [A]


Fig.18 Typical Capacitance
vs. Drain - Source Voltage

1000

Coss
Ciss
Ciss
Ta=25°C
f=1MHz
VGS=0V

Drain - Source Voltage : -VDS [V]

Fig.19 Switching Characteristics



Gate - Source Voltage : -V<sub>GS</sub> [V]


10 8 6 4 T<sub>a</sub>=25°C  $V_{DD}^{a} = -15V$ 2  $I_{D} = -2.5A$  $R_G = 10\Omega$ Pulsed 0 0 2 4 6 8 10

Total Gate Charge : Q<sub>q</sub> [nC]

Fig.20 Dynamic Input Characteristics

## •Electrical characteristic curves

Fig.21 Source Current vs. Source Drain Voltage



Source-Drain Voltage : - $V_{SD}$  [V]

## Measurement circuits

Fig.1-1 Switching Time Measurement Circuit




Fig.2-1 Gate Charge Measurement Circuit




Fig.1-2 Switching Waveforms






Fig.2-2 Gate Charge Waveform



## ●Dimensions (Unit : mm)

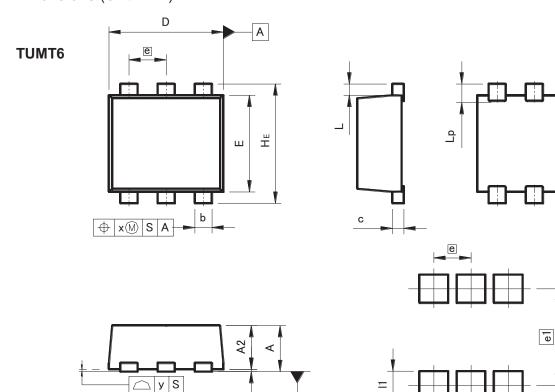

Ą

Patterm of terminal position areas

DIM	MILIMI	ETERS	INCHES		
DIM	MIN	MAX	MIN	MAX	
Α	ı	0.85	-	0.033	
A1	0.00	0.10	0	0.004	
A2	0.72	0.82	0.028	0.032	
b	0.25	0.40	0.01	0.016	
С	0.12	0.22	0.005	0.009	
D	1.90	2.10	0.075	0.083	
E	1.60	1.80	0.063	0.071	
е	0.0	65	0.0	03	
HE	2.00	2.20	0.079	0.087	
L	0.5	20	0.0	01	
Lp	_	0.40	_	0.016	
Х	_	0.10	_	0.004	
У	_	0.10	_	0.004	

DIM	MILIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
e1	1.	70	0.067		
b2	_	0.50	_	0.02	
l1	-	0.50	-	0.02	

Dimension in mm/inches

## **Notice**

#### **Precaution on using ROHM Products**

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASSⅢ	OL ACOM	CLASS II b	ОГУООШ
CLASSIV	CLASSⅢ	CLASSⅢ	CLASSⅢ

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
  - [a] Installation of protection circuits or other protective devices to improve system safety
  - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
  - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
  - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
  - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
  - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
  - If Sealing or coating our Products with resin or other coating materials
  - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
  - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- 9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

### Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

#### **Precautions Regarding Application Examples and External Circuits**

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

#### **Precaution for Electrostatic**

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

#### **Precaution for Storage / Transportation**

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
  - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
  - [b] the temperature or humidity exceeds those recommended by ROHM
  - [c] the Products are exposed to direct sunshine or condensation
  - [d] the Products are exposed to high Electrostatic
- Even under ROHM recommended storage condition, solderability of products out of recommended storage time period
  may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is
  exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

#### **Precaution for Product Label**

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

#### **Precaution for Disposition**

When disposing Products please dispose them properly using an authorized industry waste company.

#### **Precaution for Foreign Exchange and Foreign Trade act**

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

#### **Precaution Regarding Intellectual Property Rights**

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

#### Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PAA-E Rev.003

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor: