


STPS10200SF

Datasheet

200 V, 10 A power Schottky rectifier



Features

- Low profile design 1.1 mm package typical height
- Wettable flanks for automatic visual inspection
- Very low conduction losses
- High junction temperature capability
- ECOPACK2 compliant

Applications

- AC/DC converter, as for LED lighting applications
- DC/DC converter, especially for server stand by power supply or telecom
- Secondary rectification
- DC / DC converter
- Auxiliary Power supply
- Freewheeling function
- Reverse battery protection

Description

This 10 A, 200 V Schottky diode is suitable for power supply, especially for lighting power, server or telecom.

Packaged in PSMC (TO-277A), STPS10200SF provides a high level of performance in a compact and flat package which can withstand high operating junction temperature.

| Product status link | | | |
|-----------------------|---------|--|--|
| STPS10200SF | | | |
| Product | summary | | |
| Symbol Value | | | |
| I _{F(AV)} | 10 A | | |
| V _{RRM} | 200 V | | |
| T _j (max.) | 175 °C | | |
| V _F (typ.) | 0.660 V | | |

1 Characteristics

(7/

Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified, anode terminals shortcircuited)

| Symbol | Parameter | Value | Unit | |
|--------------------|--|-------------|------|---|
| V _{RRM} | Repetitive peak reverse voltage | | 200 | V |
| I _{F(AV)} | Average forward current, δ = 0.5 square wave T_c = 160 °C | | 10 | А |
| I _{FSM} | Surge non repetitive forward current | 210 | А | |
| T _{stg} | Storage temperature range | -65 to +175 | °C | |
| Tj | Maximum operating junction temperature ⁽¹⁾ | +175 | °C | |

1. $(dP_{tot'}/dT_j) < (1/R_{th(j-a)})$ condition to avoid thermal runaway for a diode on its own heatsink.

Table 2. Thermal resistance parameters

| Symbol | Parameter | Typ. value | Unit |
|----------------------|------------------|------------|------|
| R _{th(j-c)} | Junction to case | 0.84 | °C/W |

For more information, please refer to the following application note:

AN5088: Rectifiers thermal management, handling and mounting recommendations

| Table 3. Static electrical | characteristics | (anode) | terminals | short-circuited) |
|----------------------------|-----------------|---------|------------|------------------|
| | onaraotoriotioo | (unouo | cornina io | |

| Symbol | Parameter | Test conditions | | Min. | Тур. | Max. | Unit |
|-------------------------------|--|-------------------------|-----------------------------------|------|-------|-------|------|
| I _R ⁽¹⁾ | Povorao lookago ourrent | T _j = 25 °C | | - | | 6 | μA |
| 'R'' | R ⁽¹⁾ Reverse leakage current | T _j = 125 °C | V _R = V _{RRM} | - | 1.5 | 4 | mA |
| | | T _j = 25 °C | I _F = 5 A | - | | 0.830 | |
| VF ⁽²⁾ | | T _j = 125 °C | | - | 0.600 | 0.665 | N |
| VF | Forward voltage drop | T _j = 25 °C | 1 - 10 4 | - | | 0.895 | V |
| | | T _j = 125 °C | I _F = 10 A | - | 0.660 | 0.730 | |

1. Pulse test: $t_p = 5 ms, \, \delta < 2\%$

2. Pulse test: $t_p = 380 \ \mu s, \ \delta < 2\%$

To evaluate the conduction losses, use the following equation:

 $P = 0.60 \text{ x } I_{F(AV)} + 0.013 \text{ x } I_{F}^{2}(RMS)$

For more information, please refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses in a power diode

1.1 Characteristics (curves)

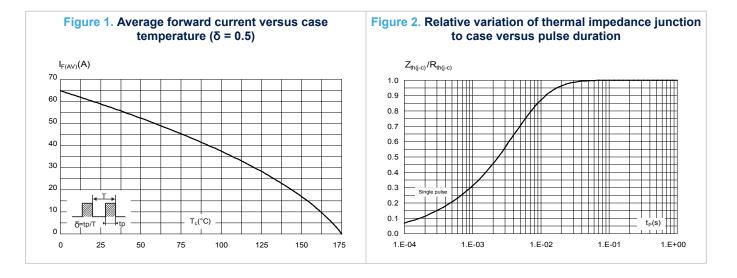





Figure 4. Junction capacitance versus reverse voltage applied (typical values)






Figure 5. Forward voltage drop versus forward current (typical values)





Figure 6. Thermal resistance junction to ambient versus copper surface under tab (typical values, epoxy printed board FR4, $e_{Cu} = 70 \ \mu$ m) (PSMC (TO-277A))

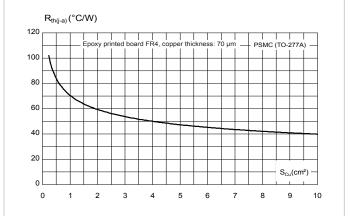

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 PSMC (TO-277A) package information

- Epoxy meets UL94,V0
- Cooling method : by conduction (C)





Figure 7. PSMC (TO-277A) package outline

C




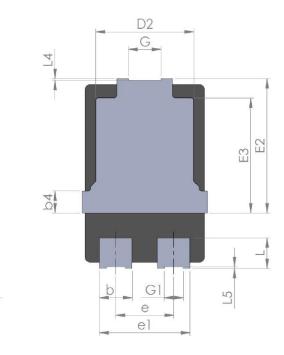

| | Dimensions | | | | | |
|------|------------|-------------|------|--------|----------------------|-------|
| Ref. | | Millimeters | | Inch | nes (for reference o | only) |
| | Min. | Тур. | Max. | Min. | Тур. | Max. |
| А | 1.00 | 1.10 | 1.20 | 0.039 | 0.043 | 0.047 |
| b | 1.05 | 1.20 | 1.35 | 0.041 | 0.047 | 0.053 |
| b2 | 1.90 | 2.05 | 2.20 | 0.075 | 0.081 | 0.087 |
| b4 | | 0.75 | | | 0.029 | |
| С | 0.15 | 0.23 | 0.40 | 0.006 | 0.009 | 0.016 |
| D | 4.45 | 4.60 | 4.75 | 0.175 | 0.181 | 0.187 |
| D1 | 4.25 | 4.40 | 4.45 | 0.167 | 0.173 | 0.175 |
| D2 | 3.40 | 3.60 | 3.70 | 0.134 | 0.142 | 0.146 |
| E | 6.35 | 6.50 | 6.65 | 0.250 | 0.256 | 0.262 |
| E1 | 6.05 | 6.10 | 6.15 | 0.238 | 0.240 | 0.242 |
| E2 | 4.50 | 4.60 | 4.70 | 0.177 | 0.181 | 0.185 |
| E3 | | 3.94 | | | 1.55 | |
| е | | 2.13 | | | 0.084 | |
| e1 | | 3.33 | | | 0.131 | |
| G | | 1.20 | | | 0.047 | |
| G1 | | 0.70 | | | 0.027 | |
| L | 0.90 | 1.05 | 1.24 | 0.035 | 0.041 | 0.049 |
| L4 | 0.02 | | | 0.0008 | | |
| L5 | 0.02 | | | 0.0008 | | |

Table 4. PSMC (TO-277A) package mechanical data

Figure 8. PSMC (TO-277A) package footprint in mm (in inches)



Note: For package and tape orientation, reel and inner box dimensions and tape outline please check TN1173



3 Ordering information

| Table | 5. | Ordering | information |
|-------|----|----------|-------------|
|-------|----|----------|-------------|

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|-------------|---------|----------------|--------|-----------|---------------|
| STPS10200SF | PS10200 | PSMC (TO-277A) | 90 mg | 6000 | Tape and Reel |

Revision history

Table 6. Document revision history

| Date | Version | Changes |
|-------------|---------|------------------|
| 01-Dec-2020 | 1 | Initial release. |

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: STPS10200SF