



# **NPN Silicon Photodarlingtons** Types OP538FA, OP538FB, OP538FC

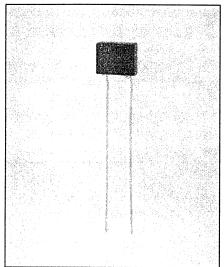

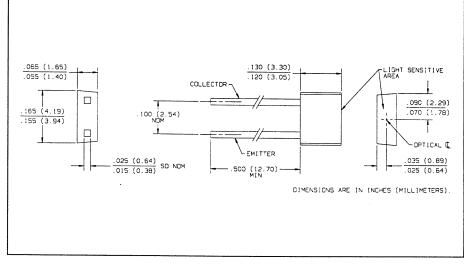

#### Features

- · Flat lensed for wide acceptance angle
- Easily stackable on 0.100 inch (2.54 mm) hole centers
- Low cost plastic package ٠
- Mechanically and spectrally matched to the OP168F and OP268F series of infrared emitting diodes

#### Description

The OP538F series consists of NPN silicon photodarlingtons mounted in flat lensed, black plastic, "end looking" packages. The flat sensing surface allows an acceptance half angle of 65° measured from the optical axis to the half power point. The black plastic package significantly reduces ambient light noise. These devices can be mounted on 0.100" (2.54 mm) hole centers making them an ideal low cost alternative to hermetic OP600 sensors.


Absolute Maximum Ratings (T<sub>A</sub> = 25° C unless otherwise noted)

Collector-Emitter Voltage 30	v
Emitter-Collector Voltage 5.0	V
Storage and Operating Temperature Range	С
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering	
iron]	
Power Dissipation	-,

(1) RMA flux is recommended. Duration can be extended to 10 seconds max. when flow soldering. Maximum 20 grams force may be applied to the leads when soldering. (2) Derate linearly  $1.33 \text{ mW}^{\circ}$  C above  $25^{\circ}$  C.

- (3) Light source is an unfiltered GaAs LED with a peak emission wavelength of 935 nm and a radiometric intensity level which varies less than 10% over the entire lens surface of the phototransistor being tested.
- (4) Due to high gain of photodarlington, a load resistor should be used to avoid thermal runaways.

### **Typical Performance Curves**

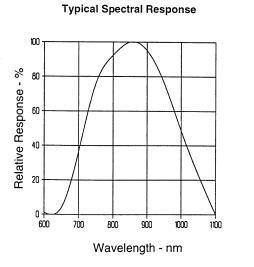

**Coupling Characteristics** of OP168F and OP538F 3.0 IF - 20 mA 2.5 V<sub>CE</sub> - 5 V Ā 2.0 **OUTPUT CURRENT** 1.5 1.0 ي 0.5 0 1.0 0.8 0 0.2 0.4 0.6 DISTANCE BETWEEN LENS TIPS - Inches


Carrollton, Texas 75006

# Types OP538FA, OP538FB, OP538FC


SYMBOL	PARAMETER		MIN	TYP	MAX	UNITS	
Iс(оn) <sup>(4)</sup>	On-State Collector Current	OP538FC OP538FB OP538FA	1.1 2.3 6.8		20.5	mA	$\begin{array}{l} V_{CE} = 5.0 \text{ V},  \text{E}_{e} = 0.5 \text{ mW/cm}^{2(3)} \\ V_{CE} = 5.0 \text{ V},  \text{E}_{e} = 0.5 \text{ mW/cm}^{2(3)} \\ V_{CE} = 5.0 \text{ V},  \text{E}_{e} = 0.5 \text{ mW/cm}^{2(3)} \end{array}$
ICEO	Collector-Dark Current				225	nA	V <sub>CE</sub> = 10.0 V, E <sub>e</sub> = 0
V(BR)CEO	Collector-Emittor Breakdown Voltage		15.0			v	I <sub>C</sub> = 1.00 mA, E <sub>e</sub> = 0
V(BR)ECO	Emitter-Collector Breakdown Voltage		5.0			V	$I_{E} = 100 \ \mu A, E_{e} = 0$
VCE(SAT)	Collector-Emitter Saturation Voltage				1.00	V	$I_{\rm C}$ = 0.5 mA, E <sub>e</sub> = 0.5 mW/cm <sup>2(3)</sup>


**Electrical Characteristics** ( $T_A = 25^{\circ}$  C unless otherwise noted)

## **Typical Performance Curves**




Rise and Fall Time vs. Load Resistance



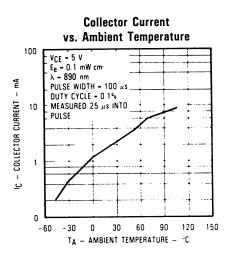


Collector Current vs. Irradiance **OSENSOR** 


ō



Switching Time Test Circuit



Normalized Collector Current vs. Angular Displacement



Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible. Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics: OP538FA