

Hi-Ratio Cable Breakout Boots, Three Entry

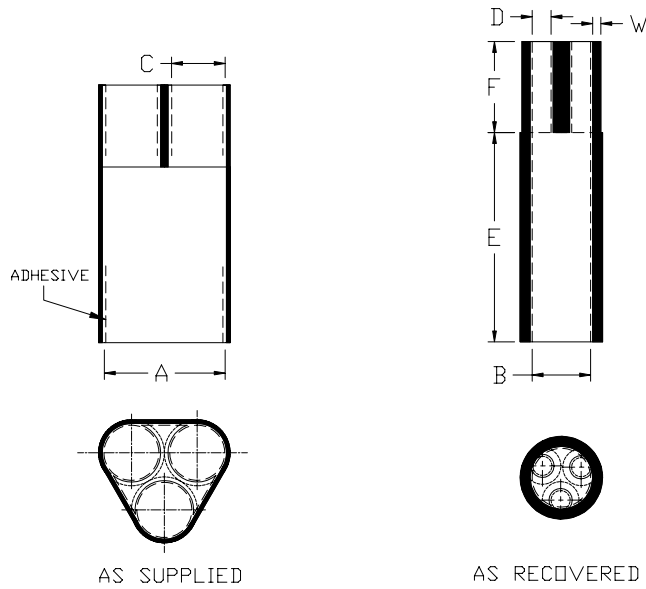


Table of Dimensions, inch (mm):

PART NUMBER (See Note*)	Body ID		Leg ID		Length Recovered Min		Rec'd. Wall Thickness Ref (W)
	Exp. (A), Min	Rec'd. (B), Max	Exp. (C), Min	Rec'd. (D), Max	(E), Body	(F), Leg	
T14-50FR	1.50 (38)	0.50 (13)	0.65 (16)	0.16 (4)	1.8 (46)	2.2 (56)	0.09 (2.3)
T3-100FR	1.70 (43)	0.36 (9)	0.82 (21)	0.12 (3)	2.3 (58)	2.2 (56)	0.12 (3.0)
T150-400FR	3.20 (81)	1.40 (36)	1.40 (36)	0.50 (13)	3.5 (89)	1.6 (41)	0.12 (3.0)

Note*: Add "NA" to the end of Part Number if no adhesive is required

Material: -152, heat shrinkable, crosslinked flexible polyolefin per Mil-I-81765/1A Type II

Factory applied sealant: Factory applied hot melt adhesive is standard.

		Wire and Harnessing Products Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA					
Specification Control Drawing				Title: <h3 style="text-align: center;">Hi-Ratio Cable Breakout Boot, Three Entry</h3>			
				Size A	Cage Code 06090	Document No. <h3 style="text-align: center;">TXXX-XXXFR-High-Ratio</h3>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Rev.: A		Rev. Date: March 12, 2003	
Drawn By: A. Ng	Org. Date: 03/12/03	Original file: N/A		File : r030125.doc	Scale: None	Sheet: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T14-50FR](#) [T14-50FR-CS8701](#)