



# Wi-Fi 6/ 6E TRIPLE BAND EMBEDDED ANTENNA

Part Numbers: 2118909-1, 2118909-2

2118909-4, 2118909-5

2118909-6, 2118909-8

1-2118909-1/-2/-3/-4/-5/-6/-7/-8


#### **FEATURES & BENEFITS**


- WiFi 6, also including WiFi 6E new 6GHz band, Bluetooth, ZigBee
- Adhesive backing on the PCB simplifies mounting within the device
- Global Frequency coverage
- PCB antenna assembly
- Different cable length and connector options available

# **SPECIFICATIONS** (Shown as 2118909-1 : Others can vary with different cable lengths.)

Frequency Range (MHz)	2400-2500	5150-5875	5925-7125		
VSWR	< 1.9:1	< 1.8:1	< 2.2:1		
Average Efficiency	80%	69%	66%		
Peak Gain	4.3dBi	4.3dBi	5.0dBi		
Average Gain	-1.0dBi	-1.6dBi	-1.9dBi		
Power Handling	10 Watt cw				
Feed Point Impedance	50 ohms unbalanced				
Polarization	Linear				
Size	40.0 mm x 8.0 mm x 1.0 mm				
Weight	< 2.3 g				
Mounting	Adhesive Tape				
Mating Connectors	MHF-type receptacle (TE PN 2337019-1), MHF4L-type receptacle (TE PN: 2334884-1)				
Cable	Coaxial Cable : 1.13mm Dia.				
Operating Temperature	-40 to +85°C				
Storage Temperature	-40 to +85°C				
Hazardous Materials	A certificate of conformance is available from the product page on TE website.				

### RF DATA (Shown as 2118909-1 : Others can vary with different cable lengths.)

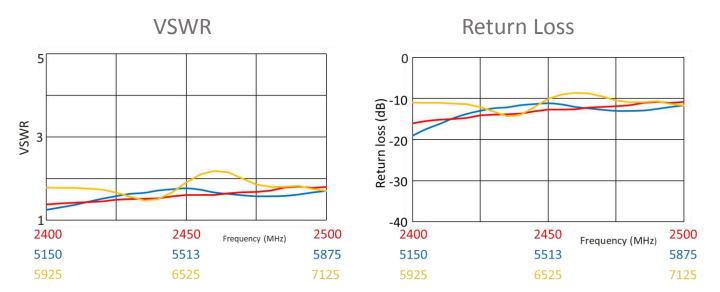


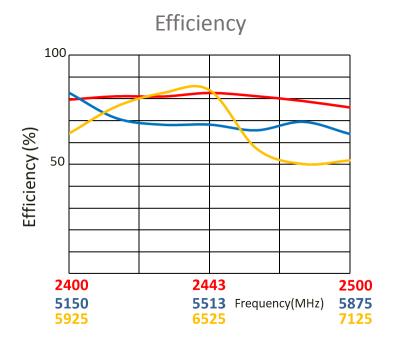

Data measured in free space and on plastic device enclosure


#### RADIATION PATTERN

(Shown as 2118909-1: Others can vary with different cable lengths.)

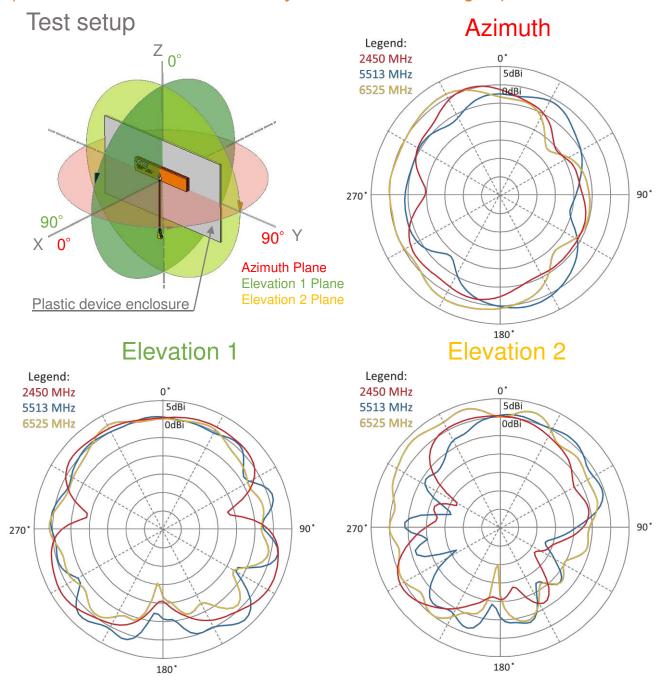

Data measured in free space and on plastic device enclosure

## **KEEP OUT AREA**

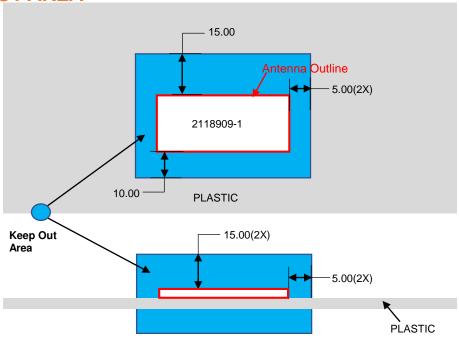


NOTES:1. Antenna designed to be mounted on plastic cover.
2. Area in blue above indicates Keep Out Area.

- 3. For more information please call TE.

Dimensions: mm Diagram is not to scale

#### **DIMENSIONS**

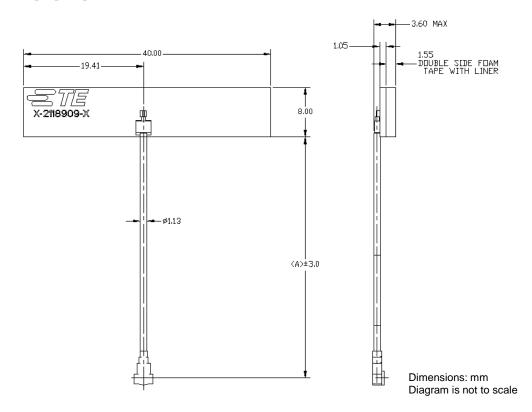


## **MATING COMPONENTS**

NUMBER	CABLE LENGTH(A)		(ON CABLE)	MATING COMPONENTS	
PART	MM	INCH	CONNECTOR TYPE	PART NUMBER	IMAGE
2118909-6	375.0	9.525	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118909-5	225.0	5.715	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118909-4	120.0	3.048	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2118909-8	64.15	1.629	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118909-2	273.0	6.934	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2118909-1	120.0	3.048	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	

1-2118909-1	50.0	1.968	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	_
1-2118909-2	100.0	3.937	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
1-2118909-3	150.0	5.905	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
1-2118909-4	200.0	7.784	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
1-2118909-5	50.0	1.968	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
1-2118909-6	100.0	3.937	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
1-2118909-7	150.0	5.905	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
1-2118909-8	200.0	7.784	MHF4L-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
PART	MM	INCH	CONNECTOR TYPE	PART NUMBER	IMAGE
NUMBER	CABLE L	CABLE LENGTH(A) (ON CAE		MATING COMPONENT	ΓS

## **PACKAGING**

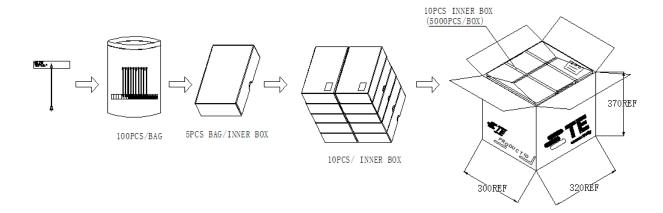



#### Wi-Fi 6/6E TRIPLE BAND EMBEDDED ANTENNA

Standard Antenna Solutions

#### TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 +1 (905) 475-6222 Canada: Mexico: +52 (0) 55-1106-0800 Latin/S. America: +54 (0) 11-4733-2200 +49 (0) 6251-133-1999 Germany: UK: +44 (0) 800-267666 France: +33 (0) 1-3420-8686 Netherlands: +31 (0) 73-6246-999 China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

#### te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

#### 12/2020



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 1-2118909-6