

Elektrische Werte

Bemessungsstrom
Durchgangswiderstand

max. 30 A*
< 1 mOhm

Werkstoff

Kontakt
Dichtung

Messing, vergoldet
FKM

Anschluss

Anschlussart/-bereich
max. Litzenaußendurchmesser
Abisolierlänge
Crimpeinstellungen

Crimp/ 1,5 - 4,0 mm²
 ø7,3 mm
 9,5 mm
 sind individuell zu wählen

Mechanische Werte

Steckzyklen

500

Werkzeuge (nicht im Lieferumfang enthalten)

Akkucrimpzange

TE Teile Nr.: C0-0313-000-000
IC Ref. Nr.: C0.313.00

analoge Crimpzange

TE Teile Nr.: C0-0008-000-000
IC Ref. Nr.: C0.008.00

Positioniereinsatz für 3,6 mm Kontakte



TE Teile Nr.: C0-0247-000-000
IC Ref. Nr.: C0.247.00

Crimpmaschine

TE Teile Nr.: WA-1672-000-000
IC Ref. Nr.: WA10672

Digitaler Crimpeinsatz, groß

TE Teile Nr.: C0-0374-000-000
IC Ref. Nr.: C0.374.00

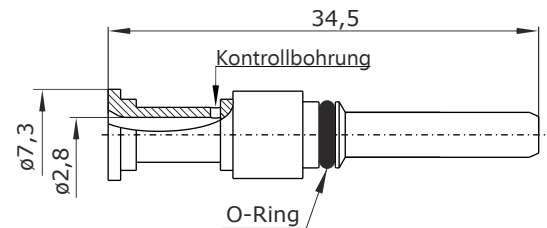

Hauptabmessungen

Kontaktstift





intercontec
products

Contact Pin ø3.6 mm

for: - 940 Receptacle
- 940 Receptacle Angled

TE part number: 61-0203-011-000
IC reference number: 61.203.11

Electrical data

rated current
contact resistance

max. 30 A*
< 1 mOhm

Material

contact
seal

brass, gold plated
FKM

Termination

cross-section
max. outer wire diameter
stripping length
crimp settings

crimp/ 1.5 - 4.0 mm²
ø7.3 mm
9.5 mm
select individually

Mechanical data

mating cycles

500

Tools (not part of product contents)

battery crimping tool

TE part no.: C0-0313-000-000
IC ref. no.: C0.313.00

analog crimping tool

TE part no.: C0-0008-000-000
IC ref. no.: C0.008.00

positioner for 3.6 mm contacts



TE part no.: C0-0247-000-000
IC ref. no.: C0.247.00

crimping machine

TE part no.: WA-1672-000-000
IC ref. no.: WA10672

digital crimp insert, large

TE part no.: C0-0374-000-000
IC ref. no.: C0.374.00

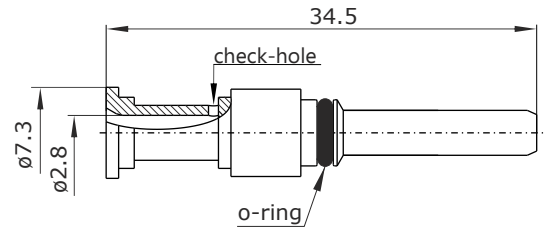

Main Dimensions

contact pin

Y6-D173-000-00EN issued: 24.10.2011/VE; modified: 23.10.2018/KC

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



* for max. wire cross-section

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[61.203.11](#)