

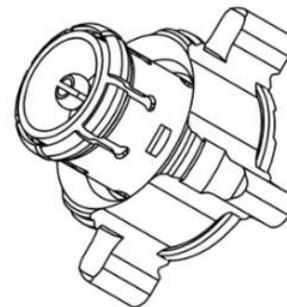

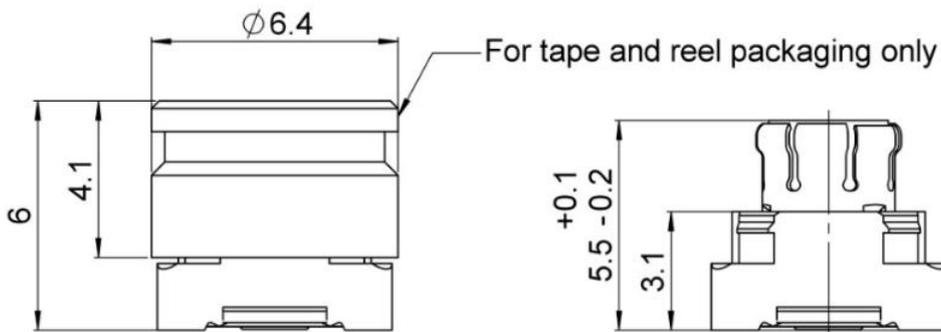
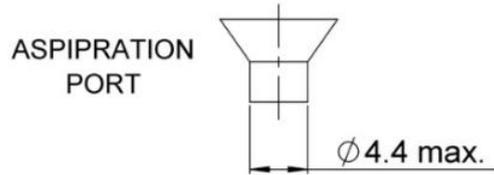


PAGE 1/5	ISSUE 17-07-20A	SERIES <b>MMBX</b>	PART NUMBER <b>R223434926</b>
----------	-----------------	--------------------	-------------------------------

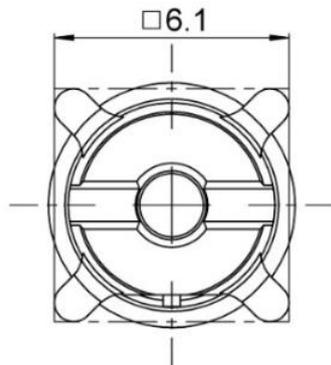

All dimensions are in mm. Tolerances according ISO 2768 m-H



COMPONENTS	MATERIALS	PLATING (μm)
Body	<b>BERYLLIUM COPPER; BRASS</b>	<b>BBR OVER SILVER</b>
Center contact	<b>BERYLLIUM COPPER; BRASS</b>	<b>Silver</b>
Outer contact		
Insulator	<b>LCP</b>	
Gasket	<b>PTFE</b>	
Others parts		
-	-	-
-	-	-

PAGE 2/5	ISSUE 17-07-20A	SERIES <b>MMBX</b>	PART NUMBER <b>R223434926</b>
----------	-----------------	--------------------	-------------------------------

**PACKAGING**

Standard	Unit	Other
<b>750</b>	<b>Contact us</b>	<b>Contact us</b>

**ELECTRICAL CHARACTERISTICS**

Impedance		<b>50</b>	Ω
Frequency		<b>0-12.4</b>	GHz
VSWR	<b>*1.065</b>	<b>+</b>	<b>0</b> x F(GHz) Maxi
Insertion loss		<b>0.12</b>	√F(GHz) dB Maxi
RF leakage		<b>**100</b>	- F(GHz) dB Maxi
Voltage rating		<b>330</b>	Veff Maxi
Dielectric withstanding voltage		<b>1000</b>	Veff mini
Insulation resistance		<b>1000</b>	MΩ mini

**ENVIRONMENTAL**

Operating temperature	<b>-55/+155</b>	°C
Hermetic seal	<b>NA</b>	Atm.cm3/s
Panel leakage	<b>NA</b>	

**MECHANICAL CHARACTERISTICS**

Center contact retention			
Axial force – Mating End	<b>NA</b>		N mini
Axial force – Opposite end	<b>NA</b>		N mini
Torque	<b>NA</b>		N.cm mini

**SPECIFICATION**

**OTHER CHARACTERISTICS**

Recommended torque			
Mating	<b>NA</b>		N.cm
Panel nut	<b>NA</b>		N.cm
Mating life		<b>100</b>	Cycles mini
Nominal Weight (Add +15% for max weight)		<b>0,58</b>	g

Assembly instruction:**NA**

Others:

**\* Up to 2GHz ; 1.106max @ 2-6 GHz**

**\*\*Interface only, up to 2.5 GHz**


**PIM3<= -140dBc,2x30dBm @700,900,1800,2600MHz**

PAGE 3/5	ISSUE 17-07-20A	SERIES MMBX	PART NUMBER R223434926
----------	-----------------	-------------	------------------------

**SOLDER PROCEDURE**

1. Deposit solder paste 'SnAg4Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux. We advise a thickness of 150 micromm ( 5.850 microinch ). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type. A video camera is recommended for positioning of the component. Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven .Below please find, the typical profile to use.
4. The cleaning of printed circuit boards is not obliged.
5. Verification of solder joints and position of the component by visual inspection


**TEMPERATURE PROFILE**

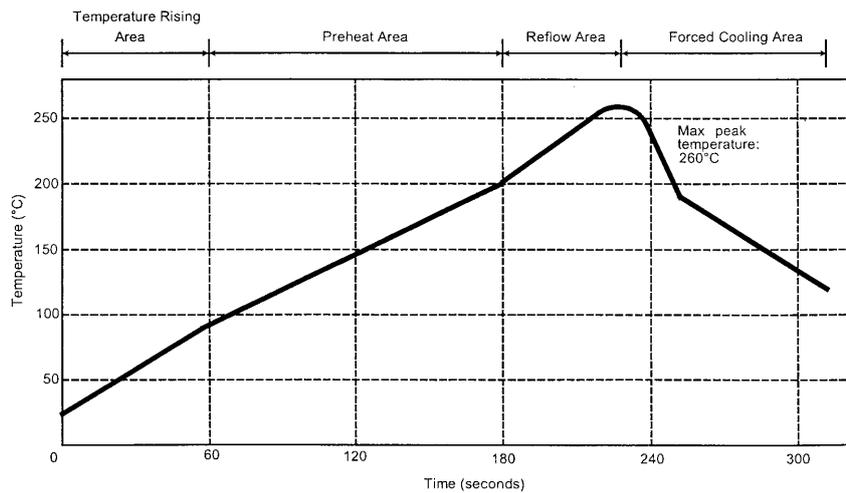


Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

PAGE 4/5	ISSUE 17-07-20A	SERIES MMBX	PART NUMBER R223434926
----------	-----------------	-------------	------------------------

PCB

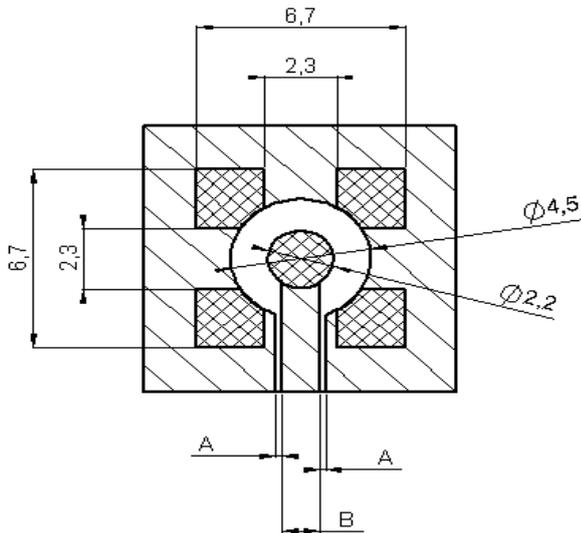

**COPLANAR LINE**  
 Pattern and signal are on the same side  
 The material of PCB is epoxy resin (FR4).  
 (Er = 4.6)  
 The solder resist should be printed  
 Except for the land pattern on the PCB



**Pattern**




**Land for solder paste**

**APPLICATION 75Ω**  
**WITH B = 0,55mm**

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,350
1,0	0,360
1,2	0,365
1,6	0,375


**APPLICATION 50Ω**  
**WITH B = 1,2mm**

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,190
1,0	0,200
1,2	0,205
1,6	0,210

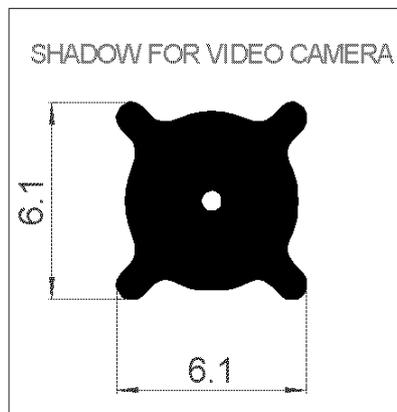



PAGE 5/5	ISSUE 17-07-20A	SERIES <b>MMBX</b>	<b>PART NUMBER R223434926</b>
----------	-----------------	--------------------	-------------------------------

**SET INFORMATIONS**

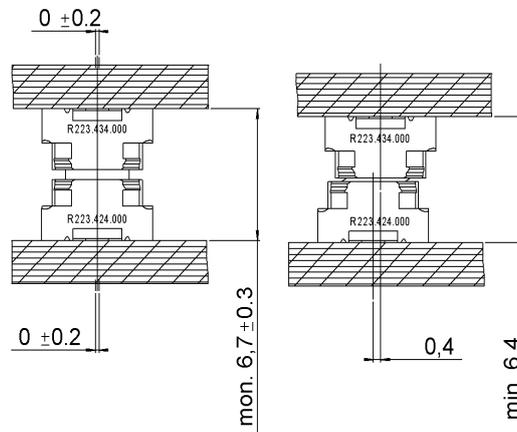

Only for set illustration.

**PACKAGE**

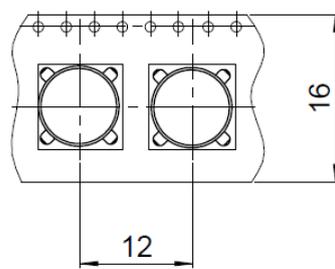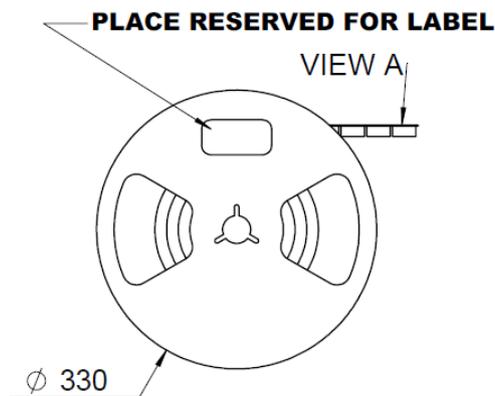

**View A**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Radial:](#)

[R223434926](#)