

BNC ATTENUATOR 6 DB 2 GHZ 2W

Series : ATTENUATOR

R412.406.000



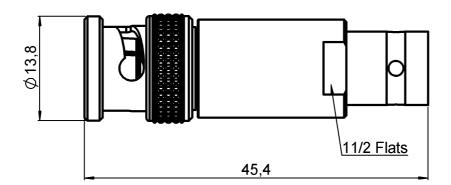



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING(μm)
BODY MALE CENTER CONTACT FEMALE CENTER CONTACT OUTER CONTACT INSULATOR GASKET SUBSTRATE RESISTOR OTHERS PARTS	BRASS BERYLLIUM COPPER BERYLLIUM COPPER PTFE SILICONE RUBBER ALUMINA THIN FILM	NICKEL 5 GOLD 2.5 OVER NICKEL 1 GOLD 2.54 OVER NICKEL 1.27

Issue: 0835 C

In the effort to improve our products, we reserve the right to make changes judged to be



BNC ATTENUATOR 6 DB 2 GHZ 2W

R412.406.000

Series: ATTENUATOR

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	DC - 2	
V.S.W.R (≤)	1.20	
Deviation(±dB)	0.35	

DC - 2	GHz
50	Ω
6	dB
100	W
2	W (Free Air Cooled)
	W (Conduction Cooled)
	50


MECHANICAL CHARACTERISTICS

Connectors	BNC	Male Female	MIL-C 39012
Weight	29,2170 g		_

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-55 /+125 °C
Storage temperature range	-55 / +125 °C

Power derating Versus temperature



SPECIFICATION

OTHER CHARACTERISTICS



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R412406000