

4112-9212 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



**18 GHz SMA LATCHING S.P.10T. SWITCH**

Page  
1 / 2

OPTIONS : INDICATOR /SELF CUT-OFF /AUTO RESET / TTL DRIVE /SUPP.DIODES

### R F CHARACTERISTICS

NUMBER OF WAYS : 10  
FREQUENCY RANGE : 0 - 18 GHz  
IMPEDANCE : 50 Ohms

FREQUENCY (GHz)	0 - 3	3 - 8	8 -12.4	12.4-15.5	15.5- 18
V.S.W.R <=	1.20	1.30	1.40	1.50	1.70
INSERT. LOSS <=	0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.70 dB
ISOLATION >=	80 dB	70 dB	60 dB	60 dB	55 dB
AVER. POWER (*)	240 W	150 W	120 W	110 W	100 W

### ELECTRICAL CHARACTERISTICS

ACTUATOR : LATCHING  
NOMINAL CURRENT AT 25° C (±10%) : 500 mA  
ACTUATOR VOLTAGE (Vcc) : 28V (24 to 30V) / NEGATIVE COMMON  
TERMINALS : solder pins (250 deg.C max./30 sec.)  
INDICATOR RATING : 1 W / 30 V / 100 mA  
SELF CUT-OFF TIME : 40 ms < CT < 120 ms  
TTL INPUTS (E) - High level : 2.2 to 5.5V / 800µA at 5V  
- Low level : 0 to 0.8V / 20µA at 0.8V



### MECHANICAL CHARACTERISTICS

CONNECTORS : SMA female per MIL-C 39012  
LIFE : 2.000.000 cycles per position  
SWITCHING TIME (nominal voltage;25° C) : < 50 ms  
CONSTRUCTION : splashproof  
WEIGHT : < 360 g

### ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
STORAGE TEMPERATURE RANGE (°C) : -55 , +85


(\* : average power at 25° C per RF path)

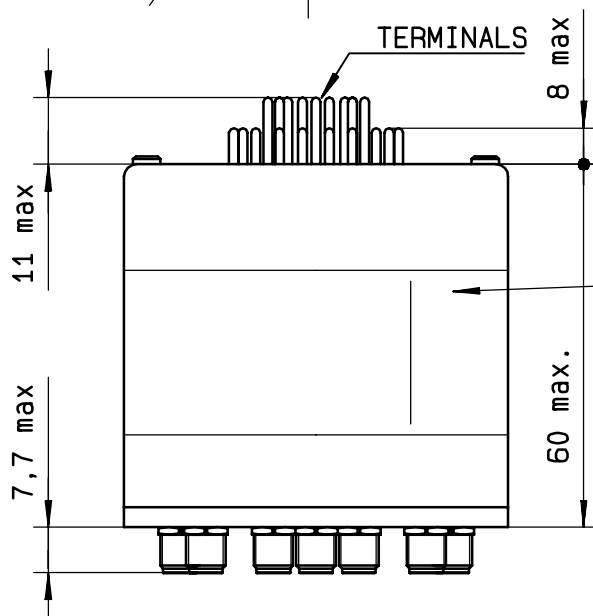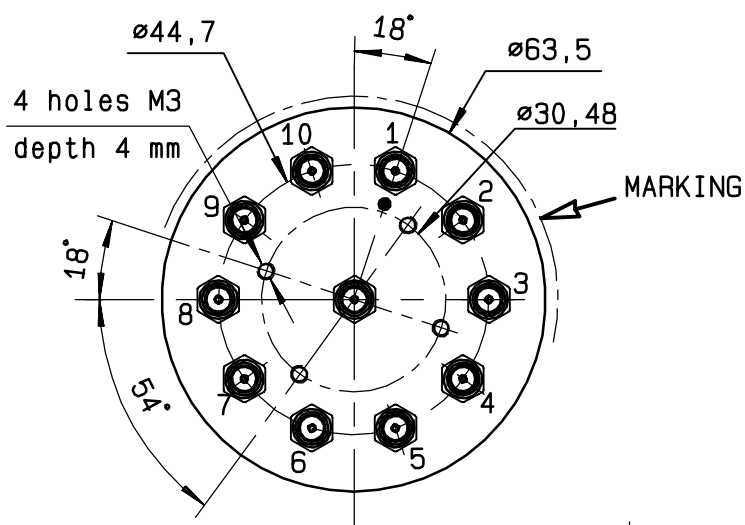


TTL input	RF continuity	Ind.
E1 = 1	IN $\leftrightarrow$ 1	D.E
E2 = 1	IN $\leftrightarrow$ 2	D.F
E3 = 1	IN $\leftrightarrow$ 3	D.G
E4 = 1	IN $\leftrightarrow$ 4	D.H
E5 = 1	IN $\leftrightarrow$ 5	D.I
E6 = 1	IN $\leftrightarrow$ 6	D.J
E7 = 1	IN $\leftrightarrow$ 7	D.K
E8 = 1	IN $\leftrightarrow$ 8	D.L
E9 = 1	IN $\leftrightarrow$ 9	D.M
E10 = 1	IN $\leftrightarrow$ 10	D.N

MARKING

TOP VIEW (TERMINALS)

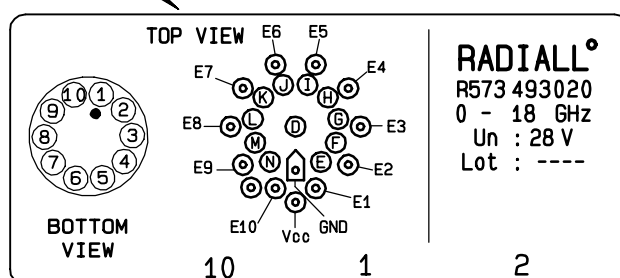

## SCHEMATIC DIAGRAM

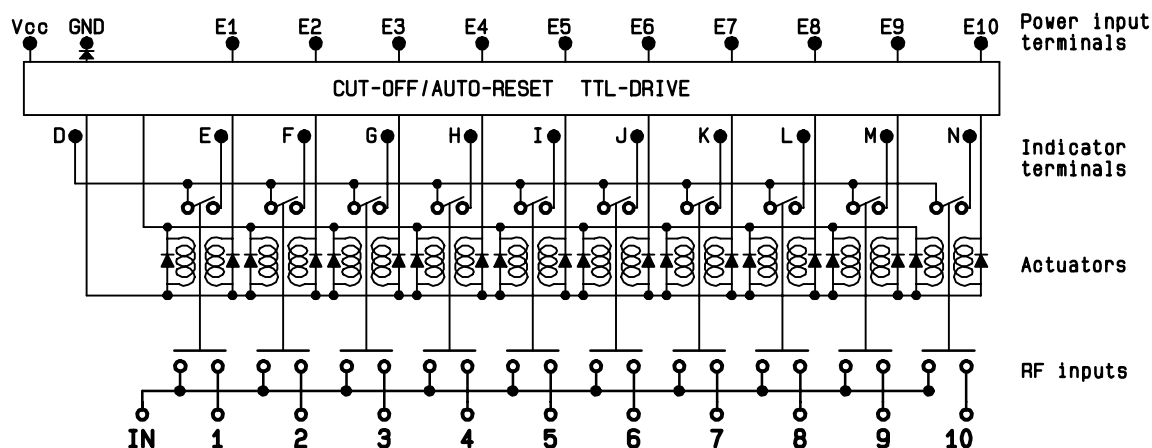

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R573493020](#)