

## Features

- Superior pulse capability
- Very high power – up to 10 W
- Excellent surge capabilities
- Super low TCR
- Non-inductive versions available
- UL 94V0, RoHS\* and SVHC compliant
- Halogen free model available

## Applications

- High power discharging applications
- Telecommunications
- Switching power supplies
- Motor controls
- High pulse withstanding applications

## PWR6927/8030/8937/A247/B053 Power Wirewound Resistors

### General Information

The Model PWR6927/8030/8937/A247/B053 Series surface mount wirewound resistors boast a high power density and excellent pulse power characteristics. These models can be used in a wide range of applications where surge voltages or inrush currents are present.

### Additional Information

Click these links for more information:



### Electrical Characteristics

Parameter	PWR6927	PWR8030	PWR8937	PWRA247	PWRB053
Power	3 W	5 W	5 W	7 W	10 W
Resistance Range 1 % Based on E24+E96 Series 5 % Based on E24 Series	0.05 Ω - 16K Ω	0.1 Ω - 22K Ω	0.1 Ω - 33K Ω	0.1 Ω - 50K Ω	0.1 Ω - 70K Ω
Resistance Range (Non-inductive Versions) Based on E24 Series	0.05 Ω - 3.3K Ω	0.05 Ω - 4K Ω	0.05 Ω - 6K Ω	0.05 Ω - 8K Ω	0.05 Ω - 10K
Tolerance	0.5 % / 1 % / 5 %				
Temperature Coefficient <0.1 Ω 0.1 - 0.99 Ω 1.0 - 10 Ω >10 Ω	±300 PPM/°C ±90 PPM/°C ±50 PPM/°C ±20 PPM/°C				
Operating Temperature	-65 °C to +175 °C				
Maximum Voltage	√P*R				

### Performance

Test	Description	Specification
Load Life	Chamber temp. 70 ±2 °C, voltage cycle: rated d.c. voltage application 1hr. 30 min. and rest of 30 min. repeatedly for 1K hrs.	ΔR ±1.0 %
Short Time Overload	0.25 W ~ 4 W: 5X rated power for 5 seconds 5 W ~ 10 W: 10X rated power for 5 seconds	ΔR ±(0.5 % +0.05 Ω)
Periodic Pulse Overload	4X power, 1 s. ON, 25 s. OFF, 10000 +400/-0 cycles	ΔR ±(0.5 % +0.05 Ω)
Shock	Impact acceleration 100 g, pulse duration 6 ms, 18 shocks	ΔR ±(0.1 % +0.05 Ω)
Vibration	10 Hz to 2 KHz, 1 oct/min., 20 g, 3 axis, 7.5 hrs.	ΔR ±(0.1 % +0.05 Ω)
Thermal Shock	-55 °C to +150 °C +3/-0 °C, 5 cycles, 15 min. in max.	ΔR ±1 %
Solderability	Bath temperature 250 ±3 °C, immersion time 3 ±0.3 sec.	>95 % of contact face covered new solder
Resistance to Solder Heat	Immersion in solder 260 °C ±5 °C for 10 ±0.3 seconds	ΔR ±(0.5 % +0.05 Ω)
Insulation Resistance	Apply max. overload voltage, duration 1 minute	>1G Ω
Dielectric Strength	Test voltage 500 V ±10 %, duration 1 minute	Pass

\* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

\*\* Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).




**WARNING**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


# PWR6927/8030/8937/A247/B053 Power Wirewound Resistors



## Surge Performance (IEC 61000-4-5 1.2 μs / 50 μs)

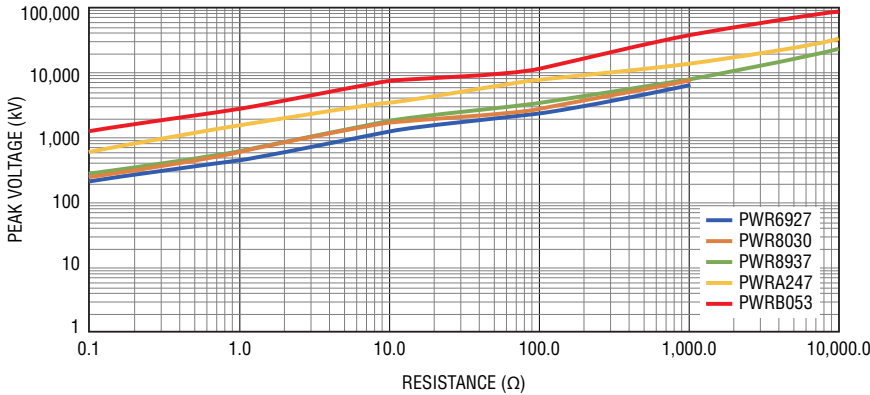

## Product Dimensions

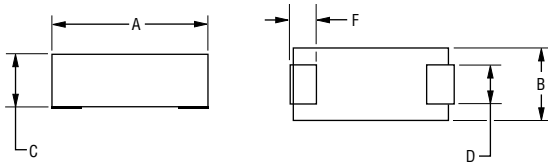

TOLERANCE:  $\frac{\pm 0.05}{(\pm .002)}$   
 DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Model	A	F	L	C	B	D	W	H
PWR6927	$\frac{17.50}{(0.689)}$	$\frac{2.50}{(0.098)}$	$\frac{18.5}{(0.728)}$	$\frac{6.80}{(0.267)}$	$\frac{6.92}{(0.272)}$	$\frac{4.80}{(0.189)}$	$\frac{3.50}{(0.138)}$	$\frac{6.00}{(0.236)}$
PWR8030	$\frac{20.80}{(0.820)}$	$\frac{3.00}{(0.118)}$	$\frac{21.8}{(0.858)}$	$\frac{7.80}{(0.307)}$	$\frac{7.60}{(0.299)}$	$\frac{4.80}{(0.189)}$	$\frac{4.00}{(0.157)}$	$\frac{5.50}{(0.217)}$
PWR8937	$\frac{22.50}{(0.886)}$	$\frac{3.00}{(0.118)}$	$\frac{23.9}{(0.941)}$	$\frac{10.30}{(0.406)}$	$\frac{9.20}{(0.362)}$	$\frac{9.20}{(0.362)}$	$\frac{4.30}{(0.169)}$	$\frac{10.0}{(0.394)}$
PWRA247	$\frac{30.60}{(1.205)}$	$\frac{3.50}{(0.138)}$	$\frac{32.0}{(1.260)}$	$\frac{13.00}{(0.512)}$	$\frac{12.0}{(0.472)}$	$\frac{11.80}{(0.465)}$	$\frac{4.80}{(0.189)}$	$\frac{12.7}{(0.500)}$
PWRB053	$\frac{51.60}{(2.030)}$	$\frac{2.00}{(0.079)}$	$\frac{53.0}{(2.087)}$	$\frac{15.00}{(0.591)}$	$\frac{13.6}{(0.535)}$	$\frac{13.6}{(0.535)}$	$\frac{3.40}{(0.134)}$	$\frac{14.3}{(0.563)}$

## Packaging Specifications

Model	Tape Width	Reel Diameter	Pieces per Reel
PWR6927	$\frac{32.0}{(1.259)}$	$\frac{330}{(13.0)}$	500
PWR8030			
PWR8937	300		
PWRA247	$\frac{44.0}{(1.732)}$		200
PWRB053	$\frac{72.0}{(2.835)}$		100


## Environmental Characteristics (Cont'd)

Moisture Sensitivity Level..... 1  
 ESD Classification (HBM)..... N/A


## Physical Characteristics

Body Material..... Epoxy resin  
 Lead Frame ..... 100 % Sn Plated Copper  
 Flammability ..... Conforms to UL 94V-0

## Typical Part Marking




## Recommended Pad Layout




Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).


**Soldering Profile**

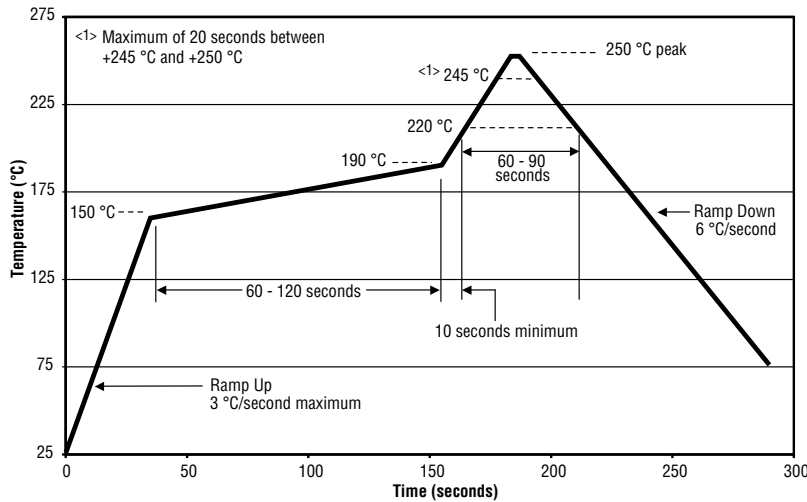

**Power Derating Curve**

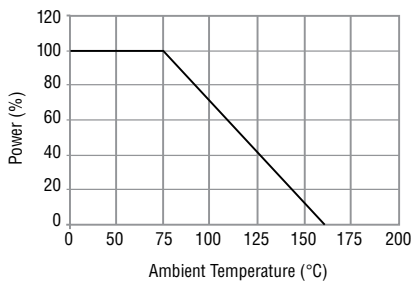

**Temperature Rise**

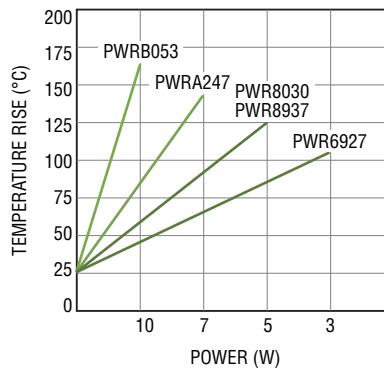

**How to Order**

**PWR6927 W 10R0 J E**

Model \_\_\_\_\_  
 PWR6927  
 PWR8030  
 PWR8937  
 PWRA247  
 PWRB053

Type \_\_\_\_\_  
 W = Wirewound  
 N = Non-inductive Option

Special Version \_\_\_\_\_  
 Blank = Default  
 H = Halogen Free

Resistance Value \_\_\_\_\_  
 <100 ohms ... "R" represents decimal point (examples: 7R50 = 7.5 Ω; R050 = 0.050 Ω)  
 ≥100 ohms.... First three digits are significant, fourth digit represents number of zeros to follow (examples: 2000 = 200 ohms; 2002 = 20K ohms)

Resistance Tolerance \_\_\_\_\_  
 J = 5 %  
 F = 1 %  
 D = 0.5 %

Packaging \_\_\_\_\_  
 E = Tape & Reel

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

*For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:*

*Web Page:* <http://www.bourns.com/legal/disclaimers-terms-and-policies>

*PDF:* <http://www.bourns.com/docs/Legal/disclaimer.pdf>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bourns:](#)

[PWR6927W1000FE](#) [PWR8937W1001FE](#) [PWR6927W47R0FE](#) [PWR8030W47R0FE](#) [PWRA247W47R0FE](#)  
[PWR8030WR100FE](#) [PWR8030W1002FE](#) [PWRB053W47R0FE](#) [PWR8030W1001FE](#) [PWRA247W1001FE](#)  
[PWR8937W1002FE](#) [PWRB053W4702FE](#) [PWR8937W1000FE](#) [PWR8030W1000FE](#) [PWR6927W1001FE](#)  
[PWRB053W1002FE](#) [PWRB053W4700FE](#) [PWR8937W4700FE](#) [PWR6927WR100FE](#) [PWRA247W1R00FE](#)  
[PWRA247W4702FE](#) [PWR8937W1R00FE](#) [PWRB053WR100FE](#) [PWRA247W1002FE](#) [PWR8030W4700FE](#)  
[PWR8937WR100FE](#) [PWRA247WR100FE](#) [PWRB053W1001FE](#) [PWR8937W47R0FE](#) [PWRB053W1R00FE](#)  
[PWR6927W1002FE](#) [PWR6927W4700FE](#) [PWR6927W1R00FE](#) [PWR8030W1R00FE](#) [PWRA247W1000FE](#)  
[PWRB053W1000FE](#)