



WIRE-WOUND CHIP INDUCTOR – CERAMIC / 0402 (1005)

0402HC Series Part Numbering

Part Numbering (Example)

(Ex.) 0402 H C - 4N7 E J I S

SIZE

0402	1.0 * 0.5 mm
0603	1.6 * 0.8 mm
0805	2.0 * 1.2 mm
1008	2.5 * 2.0 mm
1206	3.2 * 1.6 mm
1210	3.2 * 2.5 mm

SHAPE

C : C SHAPE
H : H SHAPE

PROFILE

S: STANDARD
C: HIGH CURRENT
M: OPTIMUM DIMENSION

INDUCTANCE

- FIRST 2 DIGITS ARE SIGNIFICANT
- 3 DIGIT IS MULTIPLIER

PACK/ FEATURE

S = EIA RS481 CLEAR TAPE & REEL
/STANDARD TYPE.

TERMINAL TYPE/MATERIAL.

T = TERMINAL , CERAMIC CORE (SUBSTRATE)
F = FERRITE CORE (SUBSTRATE)

INDUCTANCE TOLERANCE

G=±2%, H=±3%, J=± 5%, K=±10%, M=±20%
B=±0.1nH, C=±0.2nH, D=±0.5nH

SHAPE

E = FLAT TOP



WIRE-WOUND CHIP INDUCTOR – CERAMIC / 0402 (1005)

0402HC Series (1.3 ~ 6.0nH)

Part Number	Inductance nH	Percent Tolerance	Q Min	SRF Min GHz	R _{DC} Max Ohms	I _{DC} Max mA
0402HC-1N3E_TS	1.3 @ 100MHz	C,D	20 @ 250MHz	16.0	0.017	1200
0402HC-2N2E_TS	2.2 @ 100MHz	C,D	25 @ 250MHz	14.0	0.027	1000
0402HC-2N4E_TS	2.4 @ 100MHz	C,D	25 @ 250MHz	14.0	0.027	1000
0402HC-3N3E_TS	3.3 @ 100MHz	C,D	30 @ 250MHz	12.0	0.040	900
0402HC-3N4E_TS	3.4 @ 100MHz	C,D	30 @ 250MHz	12.0	0.040	900
0402HC-3N6E_TS	3.6 @ 100MHz	C,D	30 @ 250MHz	9.5	0.040	900
0402HC-3N9E_TS	3.9 @ 100MHz	C,D	30 @ 250MHz	7.0	0.040	900
0402HC-4N7E_TS	4.7 @ 100MHz	C,D	30 @ 250MHz	8.0	0.051	800
0402HC-5N1E_TS	5.1 @ 100MHz	C,D	30 @ 250MHz	8.0	0.051	800
0402HC-5N6E_TS	5.6 @ 100MHz	C,D	30 @ 250MHz	8.0	0.051	800
0402HC-6N0E_TS	6.0 @ 100MHz	C,D	30 @ 250MHz	7.7	0.056	760


Working Temperature Range : - 55 °C ~ +125 °C



WIRE-WOUND CHIP INDUCTOR – CERAMIC / 0402 (1005)

0402HC Series Shape Dimension

Shape & Dimension

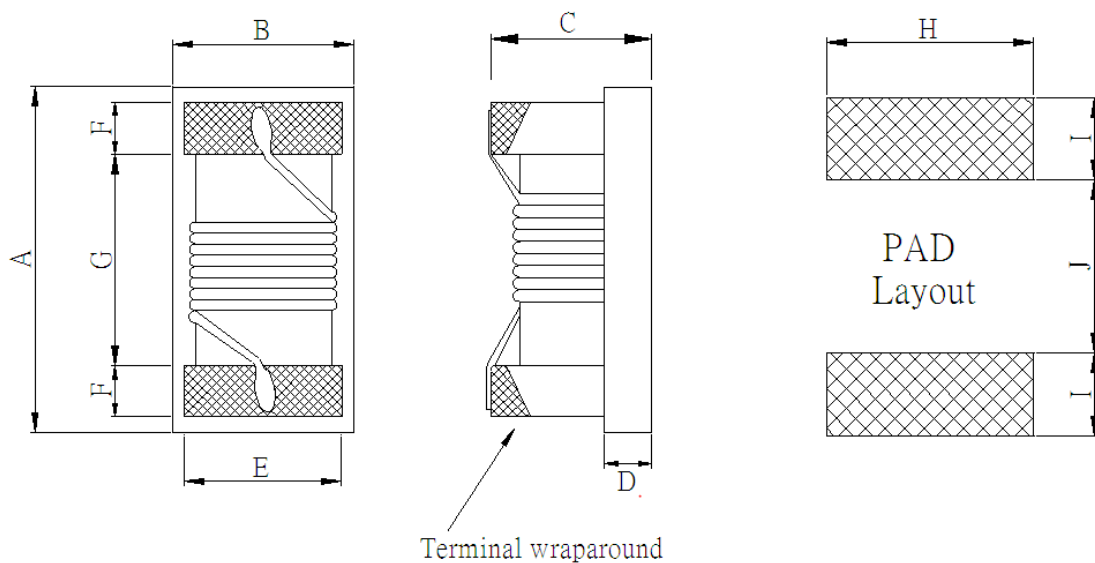



	A		B		C		D	E	F	G	H	I	J
	Max.	Min	Max.	Min	Max.	Min							
inch	0.043	0.035	0.024	0.016	0.024	0.016	0.008	0.020	0.008	0.024	0.026	0.014	0.020
mm	1.10	0.90	0.60	0.40	0.60	0.40	0.20	0.50	0.20	0.60	0.65	0.35	0.50

Parts/Reel: 7" 4,000PCS
Tape Width: 8mm



WIRE-WOUND CHIP INDUCTOR – CERAMIC / 0402 (1005)

0402HC Series Typical Electrical Characteristics

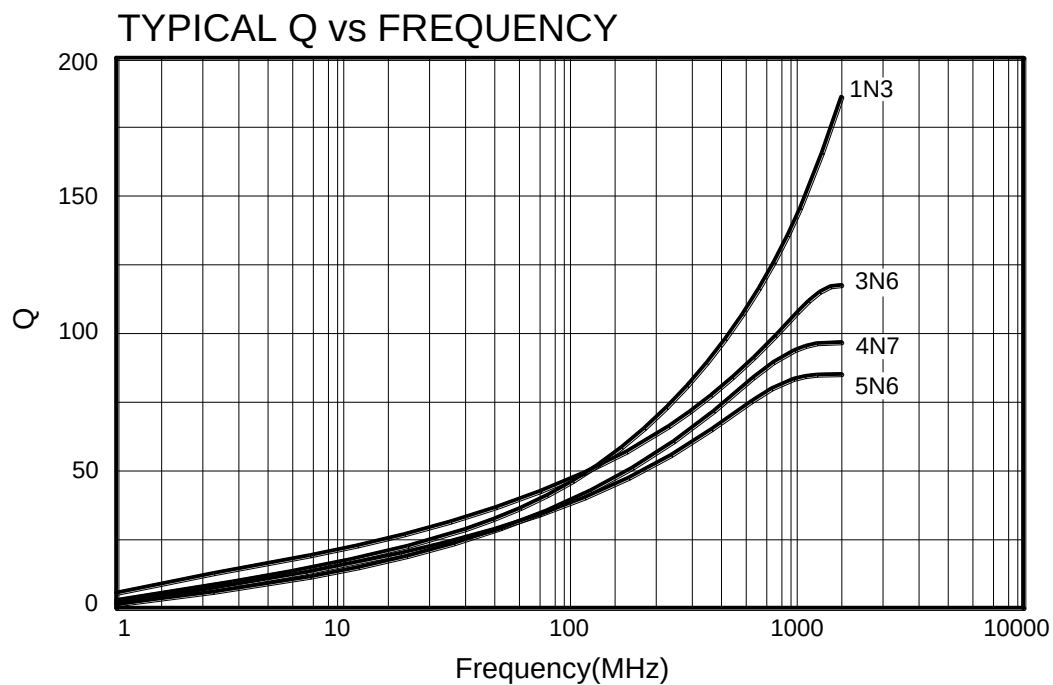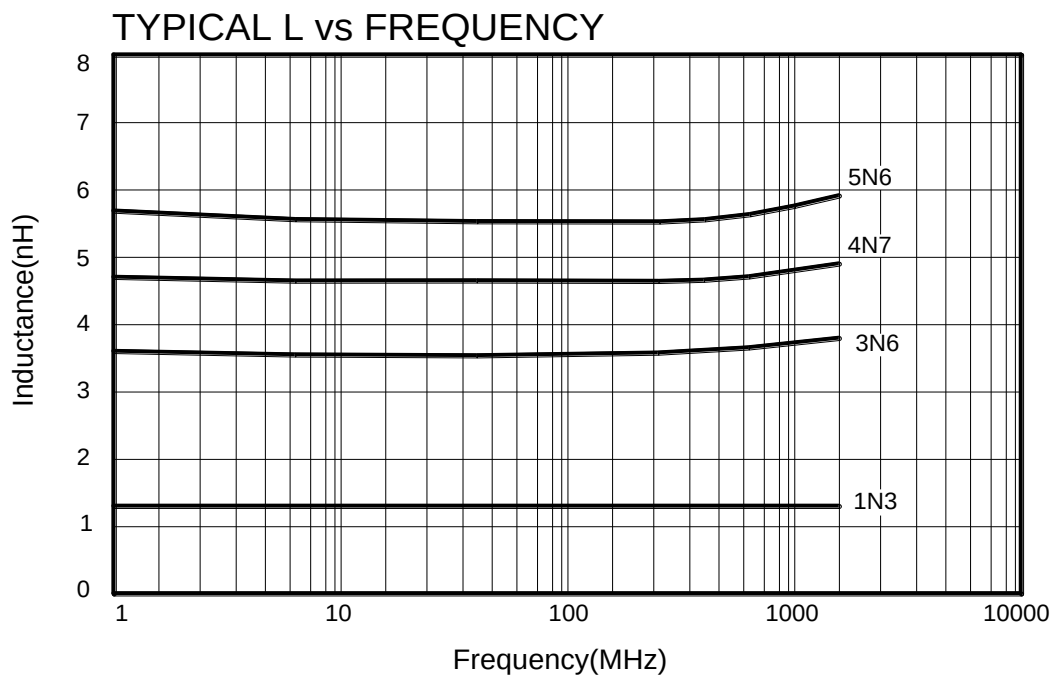

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Delta Electronics:](#)

[0402HC-1N3ECTS](#) [0402HC-1N3EDTS](#) [0402HC-2N2ECTS](#) [0402HC-2N2EDTS](#) [0402HC-2N4ECTS](#) [0402HC-2N4EDTS](#) [0402HC-3N3ECTS](#) [0402HC-3N3EDTS](#) [0402HC-3N4ECTS](#) [0402HC-3N4EDTS](#) [0402HC-3N6ECTS](#) [0402HC-3N6EDTS](#) [0402HC-3N9ECTS](#) [0402HC-3N9EDTS](#) [0402HC-4N7ECTS](#) [0402HC-4N7EDTS](#) [0402HC-5N1ECTS](#) [0402HC-5N6ECTS](#) [0402HC-5N6EDTS](#) [0402HC-6N0ECTS](#) [0402HC-6N0EDTS](#) [0402HC-5N1EDTS](#)