

# MDS-200ADB12 AA

#### **Highlights & Features**

- Safety Approvals to IEC 60601-1 3.1rd ed. & IEC 60950-1
- · Compliant with IEC 60601-1-2 4th Ed. Requirements
- 2.5" x 4.5" x 1.8" Package
- · Power Good Signal
- Up to 800K Hours MTBF
- Up to 110W convection, 200W forced air

#### Safety Standards



CB Certified for worldwide use

Model Number: Unit Weight: Dimensions (W x L x H): 64.7 x 113.9 x 44.7 mm

MDS-200ADB12 AA 345g(0.762lb) (2.5 x 4.5 x 1.8 inch)

#### **General Description**

The MDS-200ADB12 AA enclosed power supply comes with universal AC input range from 90Vac to 264Vac. Other features include low leakage, Type BF Patient Access Leakage Currents, and electric shock protection compliance with 2 x MOPP requirements. The MDS-200ADB12 AA is certified for EMC standards according to EN 55011for industrial, scientific and medical (ISM) radio-frequency equipment; and, EN 55022 for Industrial Technology Equipment (ITE) radio-frequency equipment. In addition, only recognized Japanese capacitors are used to ensure long product life.

The MDS-200ADB12 AA comes with both medical and ITE safety approvals, including UL/CE/CCC (5000meters), and CB certification. Designs are compliant with RoHS Directive 2011/65/EU for environmental protection.

#### **Model Information**

Model Number	Input Voltage	Output Voltage	Convection Current Output	Forced Air Current Output
MDS-200ADB12AA	90-264Vac	12Vdc	0-9.17A	0-16.67A*

\*With 8.5CFM forced air

#### **Model Numbering**

1

MDS	200	A	D	В	12	AA
Delta Medical power Supply	Max wattage in the product Series. Maybe lower at some voltage. 200→200W	Family Code A~ Z	Product Type D: Enclosed	Input Type Code B: 3pin Class I	Output Voltage 12 for 12V	Revision code



#### **Specifications**

#### Input Ratings / Characteristics

Nominal Input Voltage	100-240Vac
Input Voltage Range	90-264Vac
Nominal Input Frequency	50-60Hz
Input Frequency Range	47-63Hz
Input Current (max)	2.5A
Input Surge Voltage (max)	300Vac for 100ms
Full load Efficiency (typ.)	91% @ 115Vac/60Hz 93% @ 230Vac/50Hz, Reference Fig.1
Standby Power (max)	0.5W @ 115Vac/60Hz, 230Vac/50Hz
Inrush Current (max)	60A@230Vac, cold start
Input-PE(protective earth) leakage current(max)	0.1mA @ NC, 0.3mA @ SFC1)
Output-PE(protective earth) leakage current for Type BF application (max)	0.1mA @ NC, 0.5mA @ SFC 1)
Power Factor (min)	0.95 @ 115V/50Hz, 230V/50Hz, full load

1) NC: normal condition, SFC: single fault condition

#### Leakage Current

Input-PE Leakage Current	100Vac/60Hz(Typ)	264Vac/60Hz(Typ)	Delta Limit	IEC60601-1 Limit
Normal Condition	18.6uA	44.8uA	100uA max	5000uA max
Single Fault Condition	45.6uA	151.9uA	300uA max	10000uA max
Output-PE Leakage Current for Type BF application		·	·	·
Normal Condition	39.2uA	82.2uA	100uA max	100uA max
Single Fault Condition	44.1uA	128.1uA	500uA max	500uA max


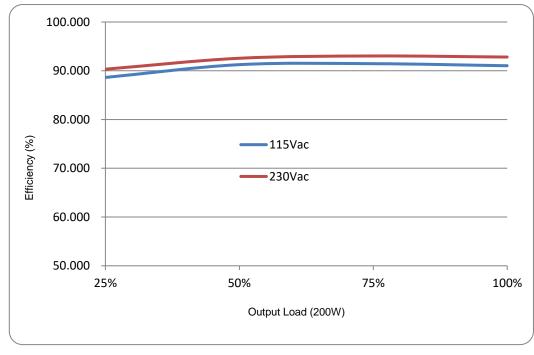


Fig.1 Efficiency versus output load




#### **Output Ratings / Characteristics**

Nominal Output Voltage (Vrated)	12V
Output Voltage Tolerance	±3%
Output Power	200W 8.5CFM air, up to 110W convection air
Line Regulation (max)	±0.5%
Load Regulation (max)	±1%
Ripple& Noise(typ.)	1%pk-pkVrated@ Full load, Reference Fig. 2
Start-up Time(max)	2000ms@115Vac
Hold-up Time(min)	12ms@115Vac, tested with 110W load
Dynamic Response(Overshoot & Undershoot O/P Voltage)	±5% @50-100% load
Capacitive load (max)	1000uF
Rise time (max)	100ms

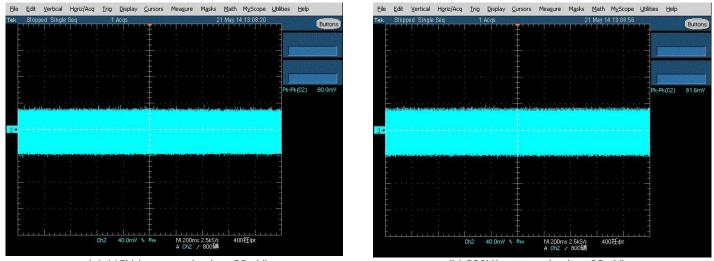


(a) 115V (measured value=80mV)

(b) 230V(measured value=82mV)



#### Ripple & Noise measurement circuit

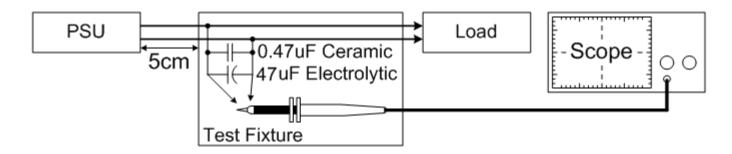



#### Mechanical


Case Cover	Enclosed cover(SPCC)
Dimensions(W x L x H typ.)	64.7x113.9x44.7mm (2.5x4.5x1.8inch)
Unit Weight	345g(0.762lb)
Indicator	NA
Cooling System	NA

#### Environment


Surrounding Air Temperature	Operating	Absolute Max -10°C to+70°C, supported powerlinearly de-rate from 50°C to 50% ratedup to 70°C Note: see power de-rating curve
	Storage	-40°C to+85°C
Operating Humidity		5-95% RH (Non-Condensing)
Operating Altitude		5,000 meters (16,400 feet or 50kPa)
Non-operating Altitude		5,000 meters (16,400 feet or 50kPa)
Shock Test (Non-Operating)		50G, 11ms, 3 shocks for each direction
Vibration (Operating)		5-500Hz, 2Grms, 15 minute for each three axis

#### Power De-rating curve

4

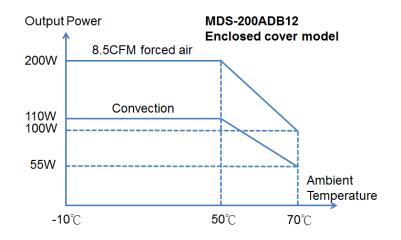

#### Load De-rating Fixture and Test Setup. Fan is DELTA Part Number AFB0512HHD.

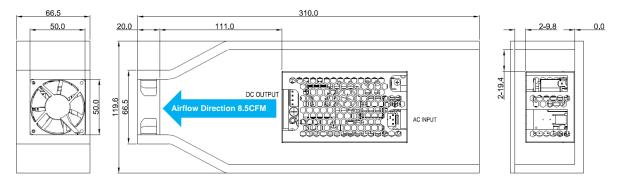



#### Protections

Overvoltage (max)	125% of rated voltage, Latch Mode
Overload / Overcurrent (max)	Main output 160% of ratedcurrent
	Hiccup Mode(Non-Latching, Auto-Recovery)
Over Temperature	Latch Mode
Short Circuit	Hiccup Mode,
	(Non-Latching, Auto-Recovery)

#### Reliability

MTBF(Minimum) at 115Vac, 110W, 35°C, Convection Air Flow	800 kHrs based on Telecordia SR-332
Operating life at 115Vac, 110W, ambient 25 °C, Convection Air Flow	26,280Hrs

#### Safety Standards / Directives

Medical Safety		IEC60601-12 <sup>nd</sup> ,3 <sup>rd</sup> and 3 <sup>rd</sup> +A1 edition CB report
		TUV EN60601-1:2006
		UL60601-1+CAN/CSA 60601-1: (Ed.3.2005)
ITE Safety		IEC60950-1 CB report
		TUV60950-1
		UL60950-1+CAN/CSA60950-1
		GB4943.1-2011, GB9254-2008, GB17625.1-2003
CE		MDD Directive 93/42/EEC
Environmental		RoHS Directive 2011/65/EU Compliant
Galvanic Isolation	Input to/Output (2XMOPP)	4000 Vac
	Input to/Ground(1XMOPP)	1500Vac <sup>1)</sup>
	Output to/Ground(1XMOPP)	1500Vac (Type BF application rated)

1) PSU can support PoE applications with Primary to FG 2500Vac test.



#### EMC (Compliant with IEC 60601-1-2 4th Ed. Requirements)

EMC / Emissions		EN55011 & Compliant with EN55032, FCC Title 47:Class B
Harmonic Current Emissions	IEC61000-3-2	Meet Class D limit
Immunity to		
Voltage Flicker	IEC61000-3-3	
Electrostatic Discharge	IEC61000-4-2	Level 4 Criteria A <sup>1)</sup> Air Discharge: 15kV Contact Discharge: 8kV
Radiated Field	IEC61000-4-3	Criteria A <sup>1)</sup> 80MHz-2700MHz, 10V/m AM modulation 385MHz-5785MHz, 28V/m Pulse mode and other modulation
Electrical Fast Transient / Burst	IEC61000-4-4	Level 3 Criteria A <sup>1)</sup> :2kV
Surge	IEC61000-4-5	Level 3 Criteria A <sup>1)</sup> Common Mode <sup>3)</sup> : 2kV Differential Mode <sup>4)</sup> : 1kV
Conducted	IEC61000-4-6	Level 2 Criteria A <sup>1)</sup> 150kHz-80MHz, 3Vrms, 6Vrms at ISM bands and Amateur radio bands
Power Frequency Magnetic Fields	IEC61000-4-8	Criteria A <sup>1)</sup> Magnetic field strength 30A/m
Voltage Dips	IEC61000-4-11	Criteria A <sup>1)</sup> 0% U <sup>+</sup> , 0.5 cycle (10ms) , 0°/45°/90°/135°/180°/225°/270°/315°/360°
		Criteria $B^{2)}$ 0% U <sub>T</sub> , 1 cycle (20ms), 0°
		Criteria B <sup>2)</sup> 70% U⊤, 25 cycle (500ms), 0°
		Criteria B <sup>2)</sup> 0% U⊤, 250 cycle (5000ms), 0º


Criteria A: Normal performance within the specification limits
Criteria B: Output out of regulation, or shuts down during test. Automatically restore to normal operation after test.
Asymmetrical: Common mode (Line to earth)
Symmetrical: Differential mode (Line to line)



#### **Dimensions**

W x L x H: 64.7 x 113.9 x 44.7 mm

#### Mechanical drawing (3Pin input type)

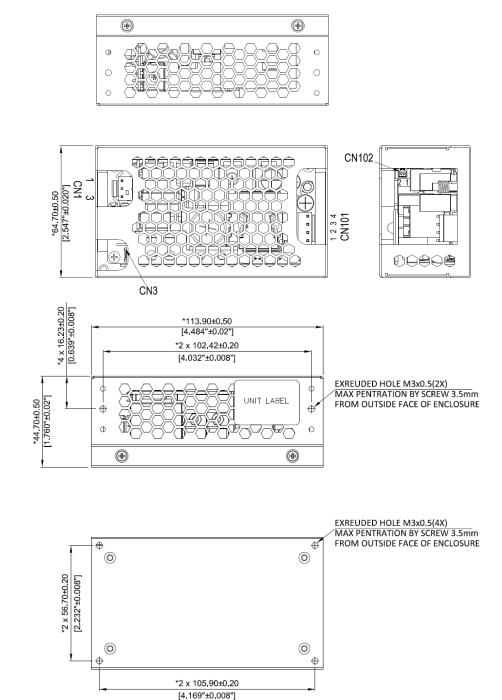

#### Notes

7

Dimensions are in mm(inches)

There are two locations where assembled power supply is connected to the customer's product

- a. Bottom mounting, use (4X) M3 screws to affix assembled power supply to product's enclosure. Extruded hole with thread must be withstand 9Kgf.cm (7.81lb-in) min. Maximum allowed screw penetration is 3.5mm (0.138 inch).
- b. Side mounting, use (2X) M3 screws to affix one side of assembled power supply to the product's enclosure. Extruded hole with thread must be withstand 9Kgf.cm (7.81lb-in) min. Maximum allowed screw penetration is 3.5mm (0.138 inch).



**TECHNICAL DATASHEET** 

# Medical AC-DC Enclosed Power Supply 12V 200W 2"x4" High Density / MDS-200ADB12 AA



Input Connector CN1		
Pin 1	Neutral	
Pin 3	Line	

Signal Connector CN102		
Pin 1	Power Good -(DC RTN)	
Pin 2	Power Good +	

CN1 mates with Molex housing 26-03-4030 and Molex series 6838 crimp terminals.

Input Line can also be connected to pin 1, and Input Neutral can be connected to pin 3  $\,$ 

Output Connector CN101			
Pin1	Vo		
Pin2	Vo		
Pin3	DC RTN		
Pin4	DC RTN		

CN102 mates with Molex housing 0874390200 and Molex 874210000 crimp terminals.

CN101 mates with JST housing VHR-4N and JST terminal SVH-41T-P1.1.

CN3: PINGOOD JP-13T mate with KST :FDFNYD1-187 or other applicable connectors

#### **Functions**

#### Start-up Time

The time required for the output voltage to reach 90% of its set value, after the input voltage is applied.

#### **Rise Time**


9

The time required for the output voltage to change from 10% to 90% of its set value.

#### Hold-up Time

Hold up time is the time when the AC input collapses and output voltage retains regulation for a certain period of time. The time required for the output to reach 90% of its set value, after the input voltage is removed.


Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

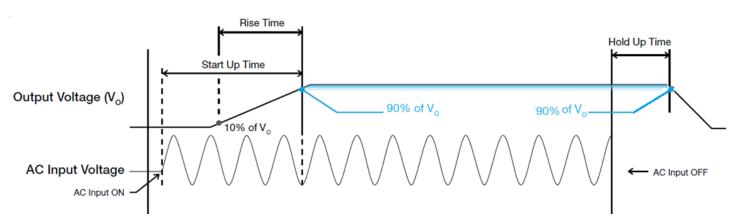




#### **Dynamic Response**

The power supply output voltage will remain within  $\pm 5\%$  of its steady state value, when subjected to a dynamic load 50 to 100% of its rated current.

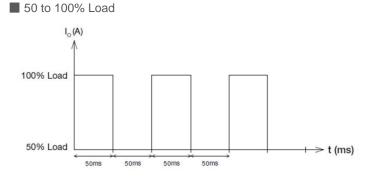

#### Inrush Current

Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.




#### **Overvoltage Protection**

The power supply's overvoltage circuit will be activated when its internal feedback circuit fails. The output voltage shall not exceed its specifications defined on Page 6 under "Protections". Power supply will latch off, and require removal/re-application of input AC voltage in order to restart.

#### Short Circuit Protection

The power supply's output OLP/OCP function also provides protection against short circuits. When a short circuit is applied, the output current will operate in "Hiccup mode", as shown in the illustration in the OLP/OCP section on this page. The power supply will return to normal operation after the short circuit is removed.



#### **Overload & Overcurrent Protections**

The power supply's Overload (OLP) and Overcurrent (OCP) Protections will be activated before output current under 160% of Io (Max load). Upon such occurrence, Vo will start to drop. Once the power supply has reached its maximum power limit, the protection will be activated and the power supply will go into "Hiccup mode" (Auto-Recovery). The power supply will recover once the fault condition causing the OLP and OCP is removed and Io is back within the specified limit.

Additionally, if the lout is <160% but >100% for a prolong period of time (depending on the load), the Over Temperature Protection (OTP) will be activated due to high temperature on critical components. Then, the power supply will be latched off, and require recycling of input voltage to restart it.

#### **Over Temperature Protection**

As mentioned above, the power supply also has Over Temperature Protection (OTP). This is activated when the overload condition persists for an extended duration and the output current is below the overload trigger point but >100% load. In the event of a higher operating temperature condition at 100% load, the power supply will run into OTP when the surrounding air temperature is higher than the operating temperature. When activated, the output voltage will go into latch mode until the input voltage is removed; then, reapplied, and the surrounding air temperature drops to its normal operating temperature.





#### **TECHNICAL DATASHEET**

### Medical AC-DC Enclosed Power Supply 12V 200W 2"x4" High Density / MDS-200ADB12 AA

#### **Power Good**

Power Good+ pin is an open collector transistor (40V/600mA rating). A resistor (suggested value 20Kohm, 1/8W) can be added between output pin (or, other available pull-up voltage that is no greater than 30V) and the Power Good+ pin (refer to figure below). Value of pull-up resistor may have to be adjusted, depending on voltage used, and other end-use conditions of the Power Good+ pin connection to the product. When AC input is on, Power Good+ pin will be high. When AC input is off, Power Good+ pin will be low. There will be a minimum of 5 milliseconds (with 120W convection output power) between the time the power good goes to low level, and the time when the output reaches 90% of its rated value.



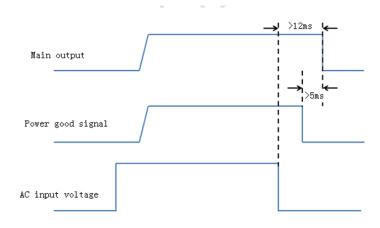



#### Certificate



All Delta Medical Power products conform to the European directive 2011/65/EU. RoHS is the abbreviation for "Restriction of the use of certain hazardous substances



Delta has been certified as meeting the requirement of ISO 13485: 2003 and EN ISO 13485:2012 for the design and manufacture of switching power supply and adaptor for medical device.



In addition to a UL Total Certification Program (TCP) approved client laboratory for IEC60950 and IEC60065. Delta also has participated UL Client Test Data Program (CDTP) for IEC 60601

#### Attention

Delta provides all information in the datasheets on an "AS IS" basis and does not offer any kind of warranty through the information for using the product. In the event of any discrepancy between the information in the catalog and datasheets, the datasheets shall prevail (please refer to www.DeltaPSU.com for the latest datasheets information). Delta shall have no liability of indemnification for any claim or action arising from any error for the provided information in the datasheets. Customer shall take its responsibility for evaluation of using the product before placing an order with Delta.

Delta reserves the right to make changes to the information described in the datasheets without notice.



### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics: MDS-200ADB12 AA