

General Description

SY205236ABC is a low-capacitance transient voltage suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With a typical capacitance of 3.5pF, SY205236ABC is designed to protect against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD) ($\pm 30\text{kV}$ air, $\pm 30\text{kV}$ contact discharge), IEC 61000-4-5 (lightning) (20A, 8/20 μs).

The combined features of low capacitance, small size and high ESD robustness make SY205236ABC ideal for high-speed data ports and high-frequency lines (e.g., USB2.0) applications. The low clamping voltage of the SY205236ABC guarantees minimum stress on the protected IC.

Each SY205236ABC device can protect four high-speed data lines. The SY205236ABC is available in a compact SOT23-6 package.

Features

- Transient Protection for High-Speed Data Lines
 - IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Air) $\pm 30\text{kV}$ (Contact)
 - IEC 61000-4-5 (Lightning) 20A (8/20 μs) Cable Discharge Event (CDE)
- Package Optimized for High-Speed Lines
- Small Package (2.9mm \times 2.8mm \times 1.4mm)
- Protects Four Data Lines
- Low Capacitance: 3.5pF @ 0V (Typical)
- Low Leakage Current: 0.1 μA @ V_{RWM} (Typical)
- Low Clamping Voltage
- Each I/O pin can withstand over 1000 ESD strikes for $\pm 8\text{kV}$ contact discharge.


Applications

- USB2.0 Power and Data Line Protection
- Digital Visual Interfaces (DVI)
- 10/100/1000M Ethernet Interfaces
- Desktops, Servers, and Notebooks
- Monitors and Flat Panel Displays
- Video Graphics Cards
- SIM Ports

Mechanical Characteristics

- SOT23-6 Package
- MSL-1 Level
- Flammability Rating: UL 94V-0
- Marking: Device Code, Date Code
- Packaging: Tape and Reel


Circuit Diagram

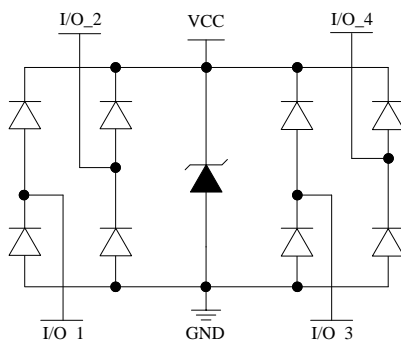


Ordering Information

Part Number	Package Type	Top Mark
SY205236ABC	SOT23-6 RoHS Compliant and Halogen Free	9VYWW

Pinout (Top View)



Marking Codes



Note 1: “9V” is device code, fixed.

Note 2: “YWW” is date code.

Absolute Maximum Rating				
Parameter	Symbol	Min	Max	Unit
Maximum Peak Pulse Current (8/20μs)	I _{PP}		20	A
Maximum Peak Pulse Power (8/20μs)	P _{PK}		350	W
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V _{ESD}	-30	30	kV
Operating Temperature	T _{OPT}	-55	+125	°C
Storage Temperature	T _{STG}	-55	+150	°C

Electrical Characteristics (T _A = 25°C)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Nominal Reverse Working Voltage	V _{RWM}				5.0	V
Reverse Leakage Current @ V _{RWM}	I _R	V _{RWM} = 5V, T _A = 25°C From I/O to GND		0.1	1.0	μA
Reverse Breakdown Voltage @ I _T	V _{BR}	I _T = 1mA From I/O to GND	6.0			V
Clamping Voltage @ I _{PP}	V _{C(1)}	I _{PP} = 20A, t _p = 8/20μs From I/O to GND		15	17	V
Clamping Voltage @ I _{PP}	V _{C(1)}	I _{PP} = 16A, t _p = 10/100ns(TLP) ² From I/O to GND		9.5	11.5	V
Dynamic Resistance	R _{DYN(1)}	t _p = 10/100ns(TLP) ² From I/O to GND		0.15		Ω
Parasitic Capacitance	C _{ESD(1)}	V _R = 0V, f = 1MHz From I/O to GND		3.5	5.0	pF
Parasitic Capacitance	C _{ESD(1)}	V _R = 0V, f = 1MHz Between I/O and I/O		1.5	2.5	pF

Note 1: Guaranteed by design and not subject to production test.

Note 2: Transmission Line Pulse Test (TLP) Settings: t_p=100ns, t_r = 10ns, I_{TLP} and V_{TLP} averaging window: t₁ = 70ns to t₂ = 90ns.


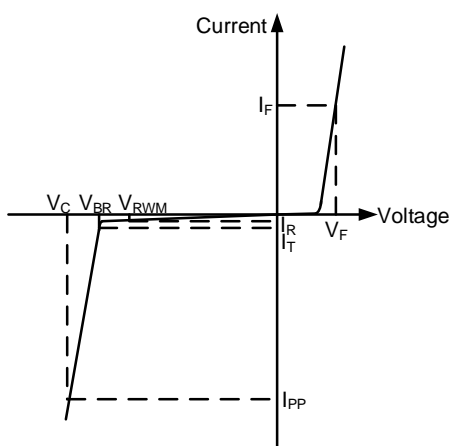



Figure 1. Uni-directional TVS

Typical Characteristics


Voltage Sweeping of I/O to GND

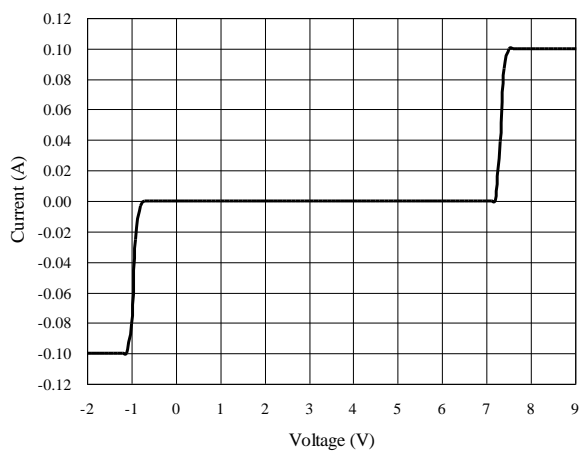


Insertion Loss S21 of I/O to GND

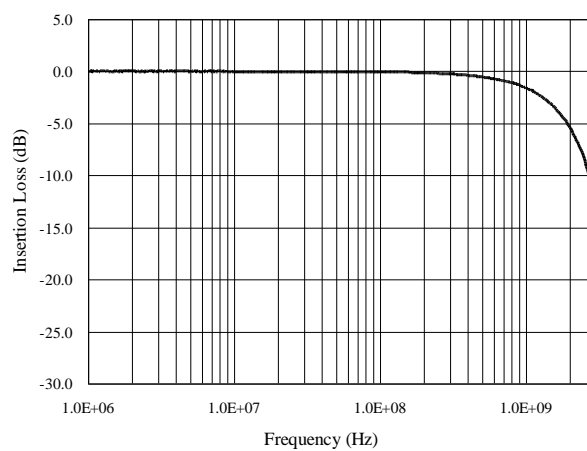


Clamping Voltage vs. Peak Pulse Current

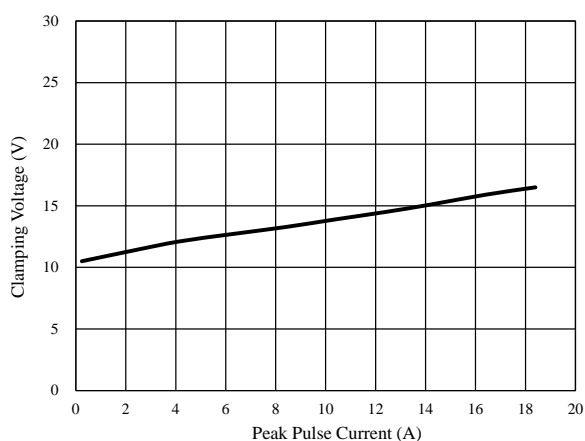


Capacitance vs. Reverse Voltage

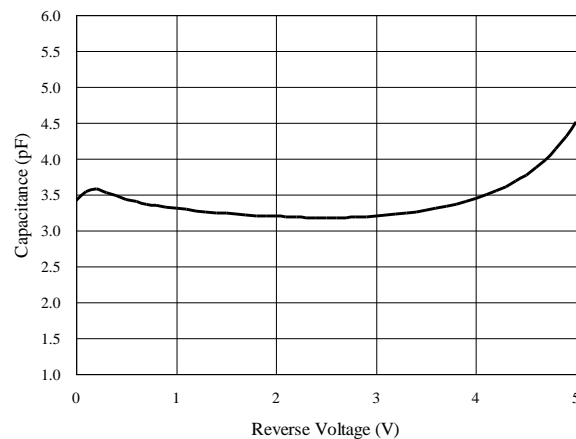

ESD Clamping of I/O to GND (+8kV Contact per IEC 61000-4-2)

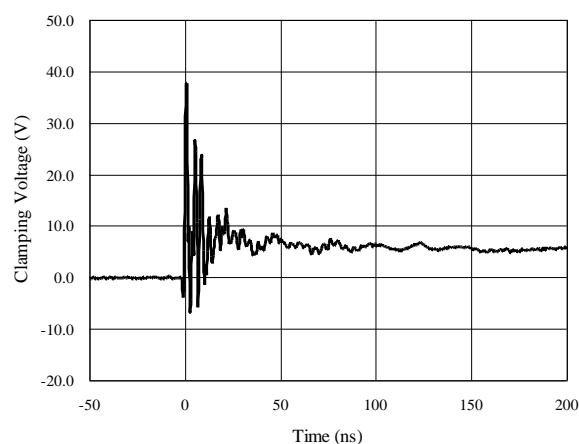

ESD Clamping of I/O to GND (-8kV Contact per IEC 61000-4-2)

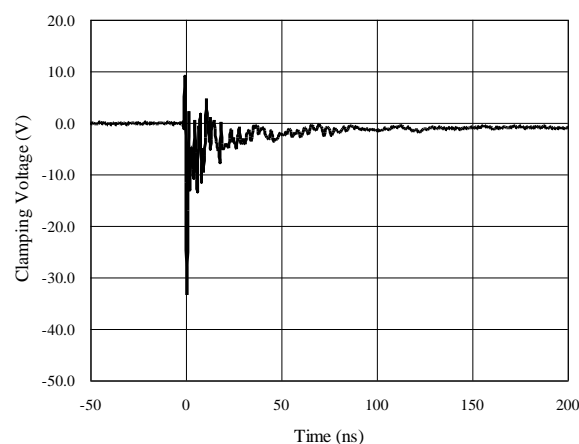

Application Information

Pin Connections

SY205236ABC is designed to provide ESD protection for four data lines simultaneously. The pin connections are shown in Figure 2.

You can connect four parallel data lines from the inner IC to the I/O port connector directly to the four SY205236ABC I/O pins. Pin2 of SY205236ABC is the negative reference pin, which should connect to the ground. Pin5 of SY205236ABC is the positive reference pin, which should connect to the power supply of the PCB. The connection wires should be as short as possible to minimize the parasitic inductance.

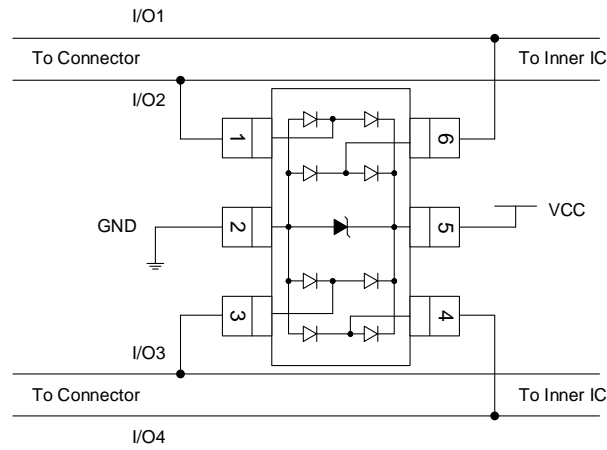


Figure 2. SY205236ABC Pin Connection in PCB

Clamping Voltage Optimization

The SY205236ABC device can use its power clamping circuit to limit the TVS clamping voltage (V_C) to a suitable value during positive and negative mode ESD stress. For example, as shown in Figure 3, if there is no power clamping circuit in SY205236ABC, the I_{ESD1} will be the ESD shunting current from I/O to VCC via D1 and L_p . The V_C at I/O port will be:

$$(1) \quad V_C = V_{F,D1} + L_p \frac{dI_{ESD1}}{dt} + V_{CC}$$

Note: $V_{F,D1}$ is the forward turn-on voltage of the steering diode D1, and L_p is the parasitic inductance in the ESD current shunting path.

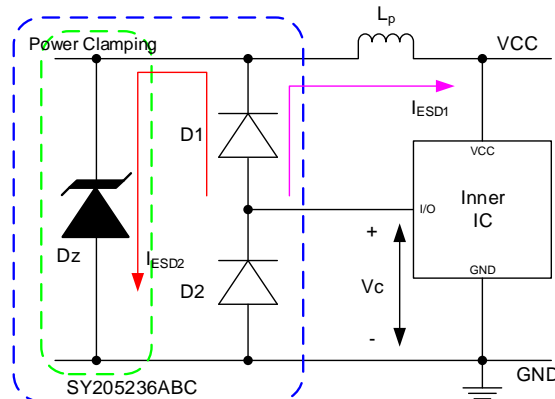


Figure 3. Positive ESD Clamping Voltage Optimization

Without a power clamping circuit, an ESD pulse could discharge a large current in a very short time (potentially ranging from 0.2ns to 10ns) causing the V_C to exceed the inner circuit capability. However, utilizing the power clamping circuit in SY205236ABC will result in the ESD shunting current as I_{ESD2} . The V_C will be:


$$(2) \quad V_C = V_{F,D1} + V_{BR,Dz} + V_{CC}$$

Note: $V_{BR,Dz}$ is the reverse breakdown voltage of diode D_z , which is much smaller than the induced clamping voltage by parasitic inductance L_p in equation (1).


PCB Layout Guidelines

For optimum ESD protection and circuit performance, the following PCB layout guidelines are recommended:


- Place SY205236ABC as close to the connector port as possible.
- The distance between the SY205236ABC ground pin and the GND reference path should be as short as possible.
- Use a large via to connect the SY205236ABC VCC and GND pins to the PCB VCC and GND.
- Avoid running critical signals near board edges.

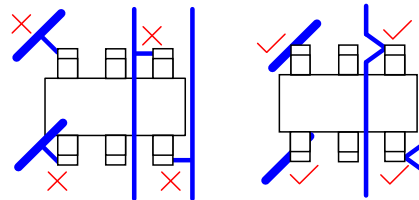

Application Information (continued)

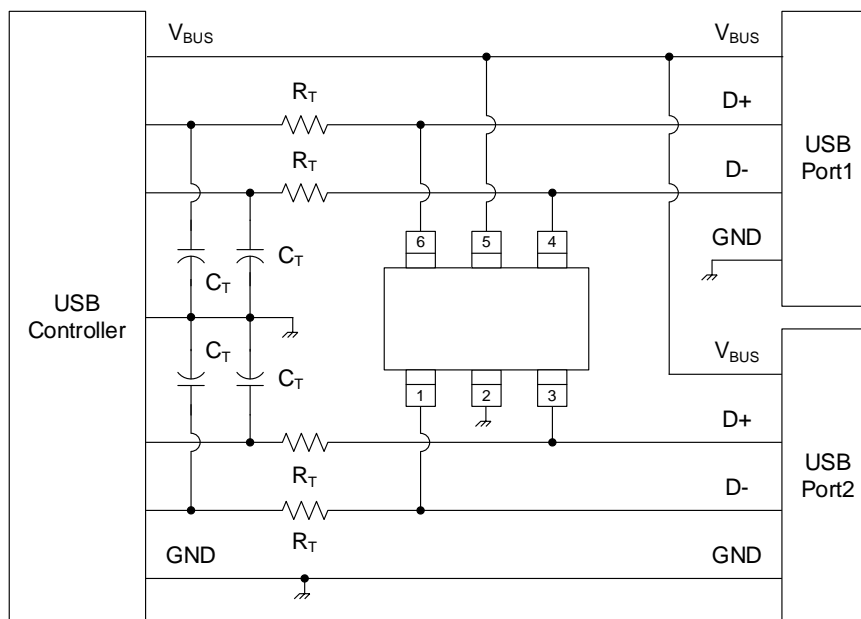


Layout Top View for Dual USB Ports with SY205236ABC

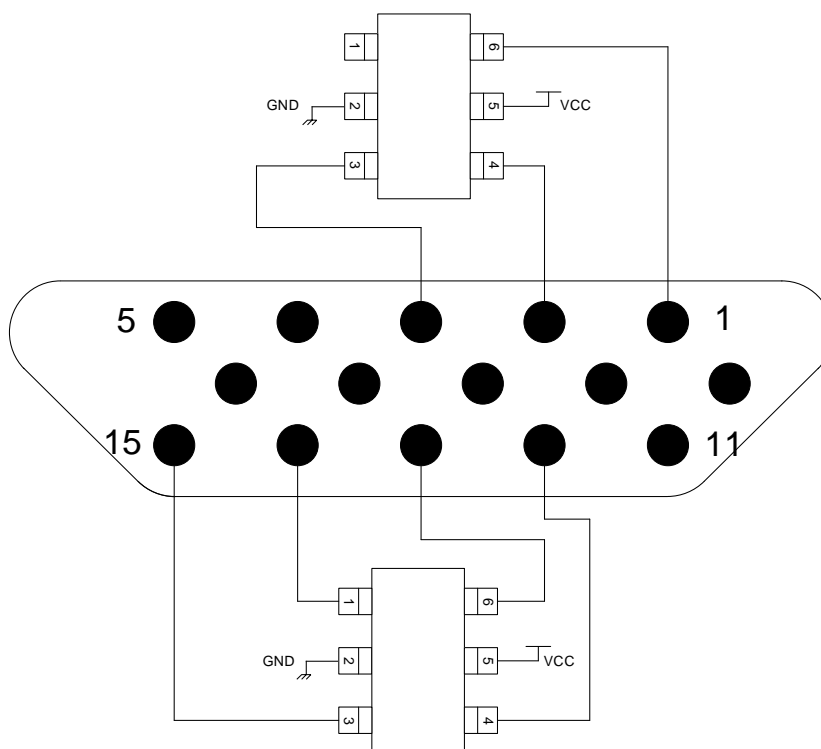


Layout Top View for Video (VGA) Interface with SY205236ABC

Application Information (continued)

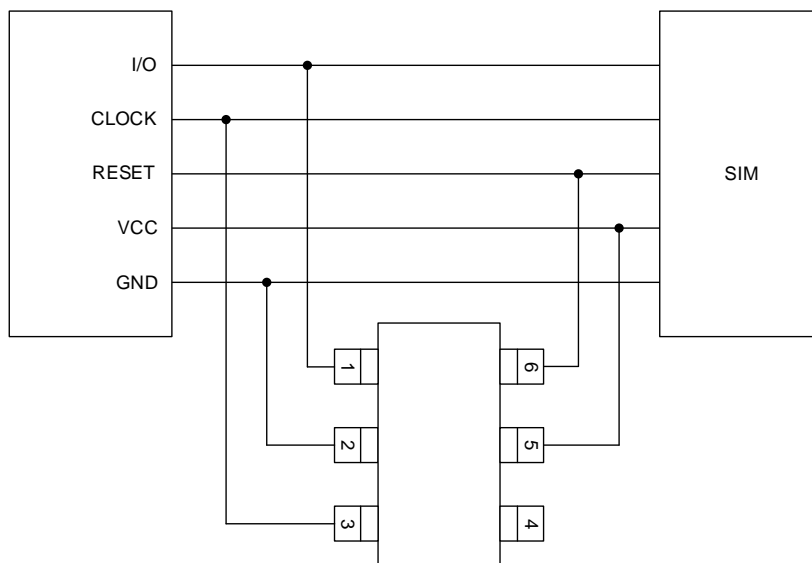


Layout Top View for SIM Port with SY205236ABC

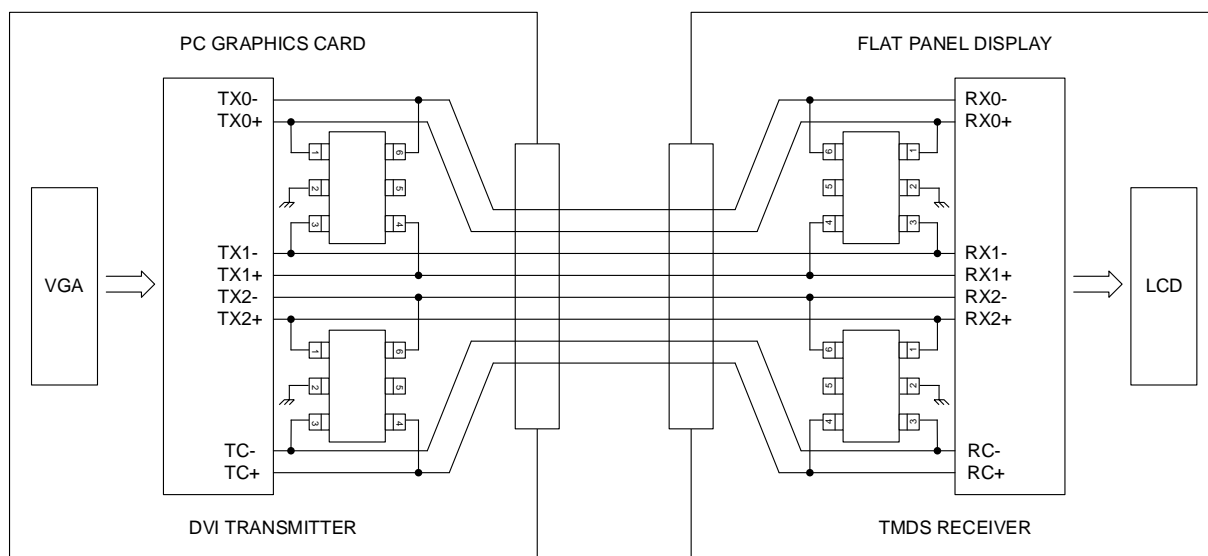

Layout Top View for Digital Visual Interface (DVI) with SY205236ABC


Application Information (continued)

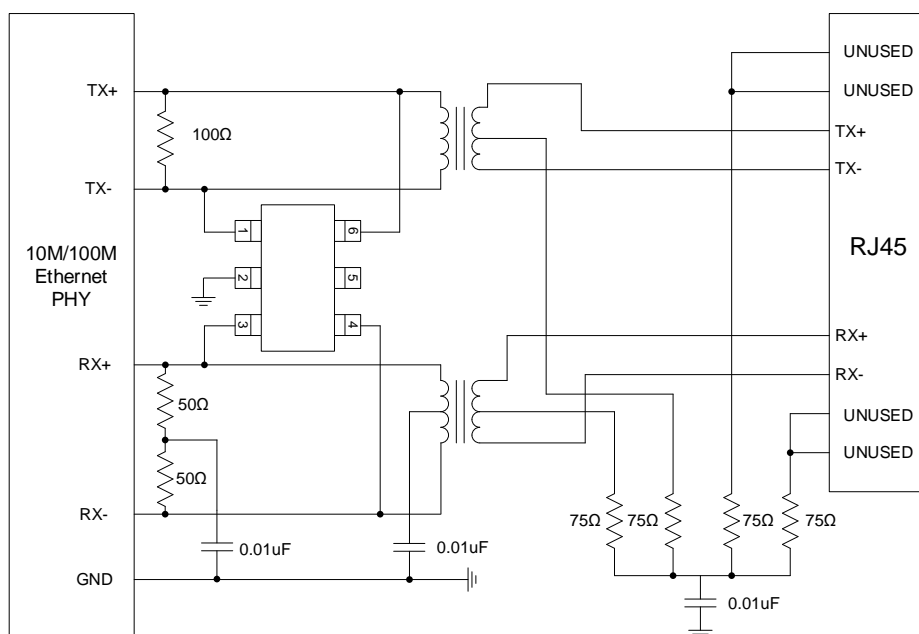


Differential and Common Mode Protection for 10M/100M Ethernet Interface with SY205236ABC

SOT23-6 Package Outline


MSL-1 Level

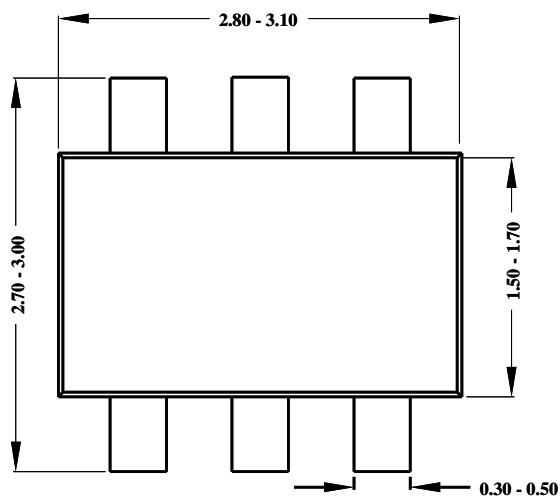


TOP VIEW

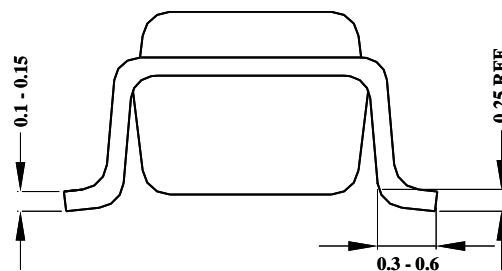

SIDE VIEW

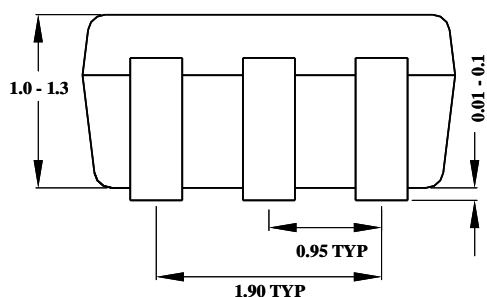

SIDE VIEW




Recommended PCB Layout
(Reference only)

Note: All dimensions are in millimeters and exclude mold flash and metal burr.


Symbol	Dimensions	
	Millimeters	Inches
A	0.60	0.024
B	1.10	0.043
C	0.95	0.037
D	1.40	0.055
E	2.50	0.098

Tape and Reel Specification

SOT23-6 Taping Orientation

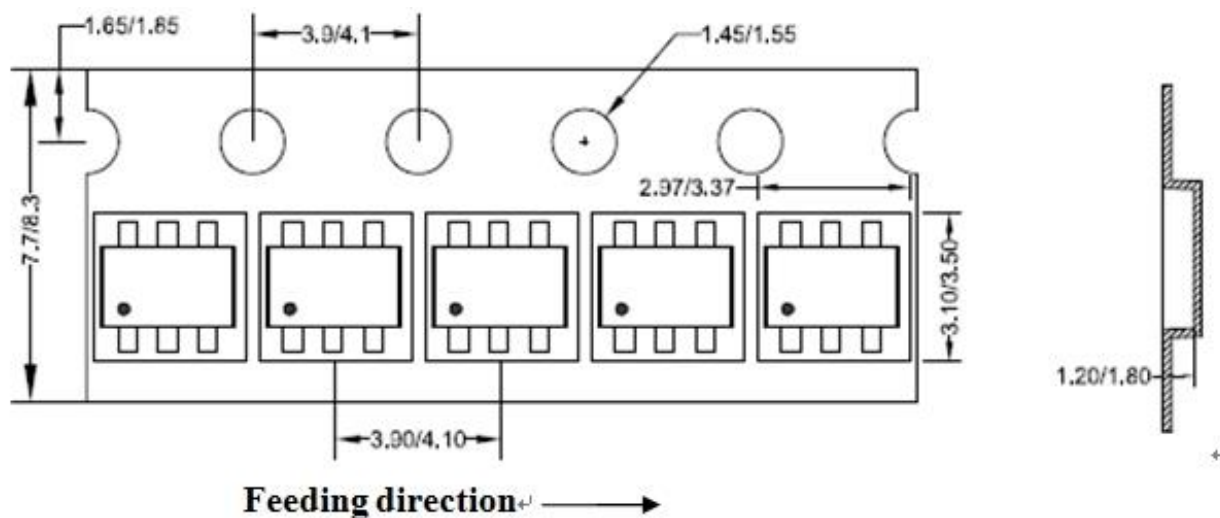

Carrier Tape & Reel Specification for Packages

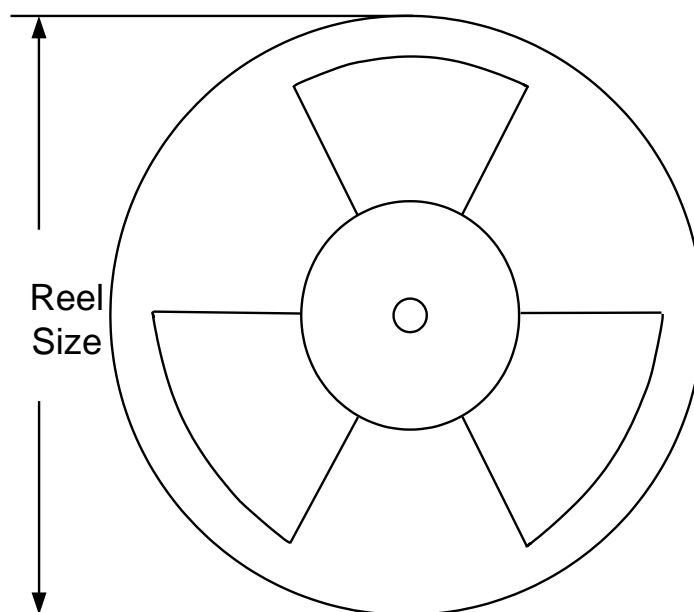

Package Types	Tape Width (mm)	Pocket Pitch(mm)	Reel Size (Inch)	Qty per Reel(pcs)
SOT23-6	8	4	7"	3000

Revision History

The revision history provided is for informational purpose only and is believed to be accurate, however, not warranted. Please make sure that you have the latest revision.

Revision Number	Revision Date	Description	Pages changed
0.9	10/25/2016	Initial Release	
1.0	10/25/2017	Production Release	

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2023 Silergy Corp.

All Rights Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Silergy:](#)

[SY205236ABC](#)