


ULTRAVOLT HIGH POWER 40C TO 60C SERIES

SINGLE OUTPUT 60, 125, OR 250 W CAPACITOR CHARGING SUPPLY

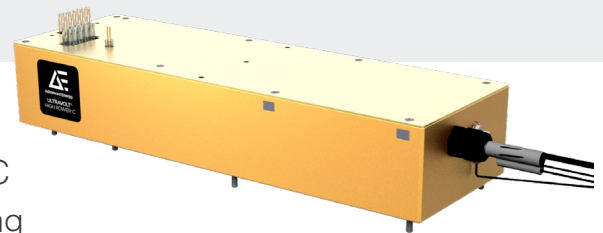

The UltraVolt® High Power C Series of regulated DC-to-DC converters are designed for high voltage capacitor charging applications that demand fast rise times with controlled voltage overshoot.

PRODUCT HIGHLIGHTS

- Regulated high voltage outputs ranging from 40,000 to 60,000 VDC maximum
- Single output: positive or negative polarity models
- Choice of 60, 125, or 250 W maximum power
- 24 VDC input
- Output ripple performance < 1.0 %
- Controlled high voltage overshoot enhances longevity of external load components
- Temperature coefficient 50 ppm/°C
- Simplified integration with available 0 to 5 VDC or 0 to 10 VDC interface
- Reliable modular design
- Factory-configured performance, control and integration options
- UL/cUL recognized, IEC-60950-1, CE Mark (LVD and RoHS)

TYPICAL APPLICATIONS

- Capacitive charging and pulsed power applications
- High potential testing and Electrostatic Discharge (ESD)
- Automated Test Equipment (ATE)
- Lasers and opto-electronics
- Ultrasonic pulse generators

AT A GLANCE

Maximum Output Voltage

40, 50, or 60 kV DC

Maximum Output Power

60, 125, or 250 W

Type

Single Output

Ripple

< 1.0 %

Control

Analog

Temperature Coefficient

50 ppm/°C

ULTRAVOLT HIGH POWER 40C TO 60C SERIES

ELECTRICAL SPECIFICATIONS

Model ¹		40C Series			50C Series			60C Series		
High Voltage Output Range (Adjustable Regulated, Positive or Negative Output)		0 to 40,000 VDC			0 to 50,000 VDC			0 to 60,000 VDC		
High Voltage Outputs		Single Unipolar			Single Unipolar			Single Unipolar		
Input Voltage (VDC, Nominal)		24 VDC			24 VDC			24 VDC		
Power Output (Watts, Nominal)		60 W	125 W	250 W	60 W	125 W	250 W	60 W	125 W	250 W
DC Input										
V _{in} (Input Voltage) Range	VDC (positive polarity only)	23 to 30			23 to 30			23 to 30		23 to 28
V _{in} (Nominal)	VDC	24			24			24		
I _{in} (Input Current, Nominal)	A @ 100% HV _{out} , 100% LOAD	< 3.3	< 6.6	< 13.5	< 3.3	< 6.6	< 13.5	< 3.3	< 6.6	< 13.5
	A @ 100% HV _{out} , 0% LOAD	< 1.3			< 1.3			< 1.3		
	A @ disable/standby state	< 0.15			< 0.15			< 0.15		
DC Output										
HV _{out} (Output Voltage)	VDC	0 to 40,000			0 to 50,000			0 to 60,000		
I _{out} (Output Current)	mA (max) @ 0 to 100% HV _{out} , V _{in} (nominal)	1.5	3.13	6.25	1.2	2.5	5	1	2.08	4.17
Current Scale Factor	mA/V	0.30	0.63	1.25	0.24	0.50	1.00	0.20	0.42	0.83
P _{out} (Output Power)	Watts (max)	60 W	125 W	250 W	60 W	125 W	250 W	60 W	125 W	250 W
Capactiance	Internal storage capacitance	750pf	750pf	375pf	600pf	600pf	300pf	500pf	500pf	250pf
Ripple ²	%	< 1.0			< 1.0			< 1.0		

¹ Standard product specifications shown unless noted. Custom configurations are available.

² Nominal ripple measured @ 100% HV_{out}, 100% LOAD into C_x > 0.5 μF. Valid for 10 to 100% HV_{out} range.

Programming and Controls	Standard	I5/I10 Interface
Control Input Impedance	+Output Models: 1.1 MΩ to GND -Output Models: 1.1 MΩ to +5 V _{ref}	10 MΩ
Adjust Resistance	10 to 100 K (Pot. across V _{ref} and signal GND, wiper to adjust)	Same as Standard
Adjust Logic	0 to 5 for +Output, +5 to 0 for -Output, +4.64 VDC for +output or +0.36 VDC for -output = Nominal	0 to +5 (I5), 0 to +10 (I10)
Reference Voltage	+5.00 VDC ±1%, Z _{out} = 464 Ω ±1%	+5 V, 3 mA ±0.1% (I5), +10 V, 3 mA ±0.1% (I10)
Enable/Disable	0 to +0.8 disable, +2.0 to 30 enable (default = enable)	0 to +0.8 disable, +2.0 to 30 enable (default = disable)


Stability and Regulation	
Stability	0.01% (100 ppm) @ 100% HV _{out} (after 30 min warmup interval)
	0.02% (200 ppm) @ 100% HV _{out} (per 8 h interval)
Line Regulation	0.01% (100 ppm) @ 100% HV _{out} , 100% P _{out} , V _{in} (nominal)
Static Load Regulation	0.01% (100 ppm) @ 100% HV _{out} , 0 to 100% LOAD
Temperature Coefficient	50 ppm/°C (Standard configuration over operating temperature range)
Power-On Rise Time	Application dependent (See Rise Time / Capacitor Charging Equations)

ELECTRICAL SPECIFICATIONS (CONTINUED)

Environmental	
Operating Temperature Range	-40 to 65°C (-40 to 149°F) bottom case temperature
Storage	-55 to 105°C (-67 to 222°F) case temperature
Humidity	0 to 95% RH, non-condensing
Altitude	Sea level to 3000 m (10,000 ft)
Regulatory	
Certifications	UL/cUL recognized, IEC-60950-1, CE mark (LVD and RoHS)

MECHANICAL SPECIFICATIONS


40C and 50C

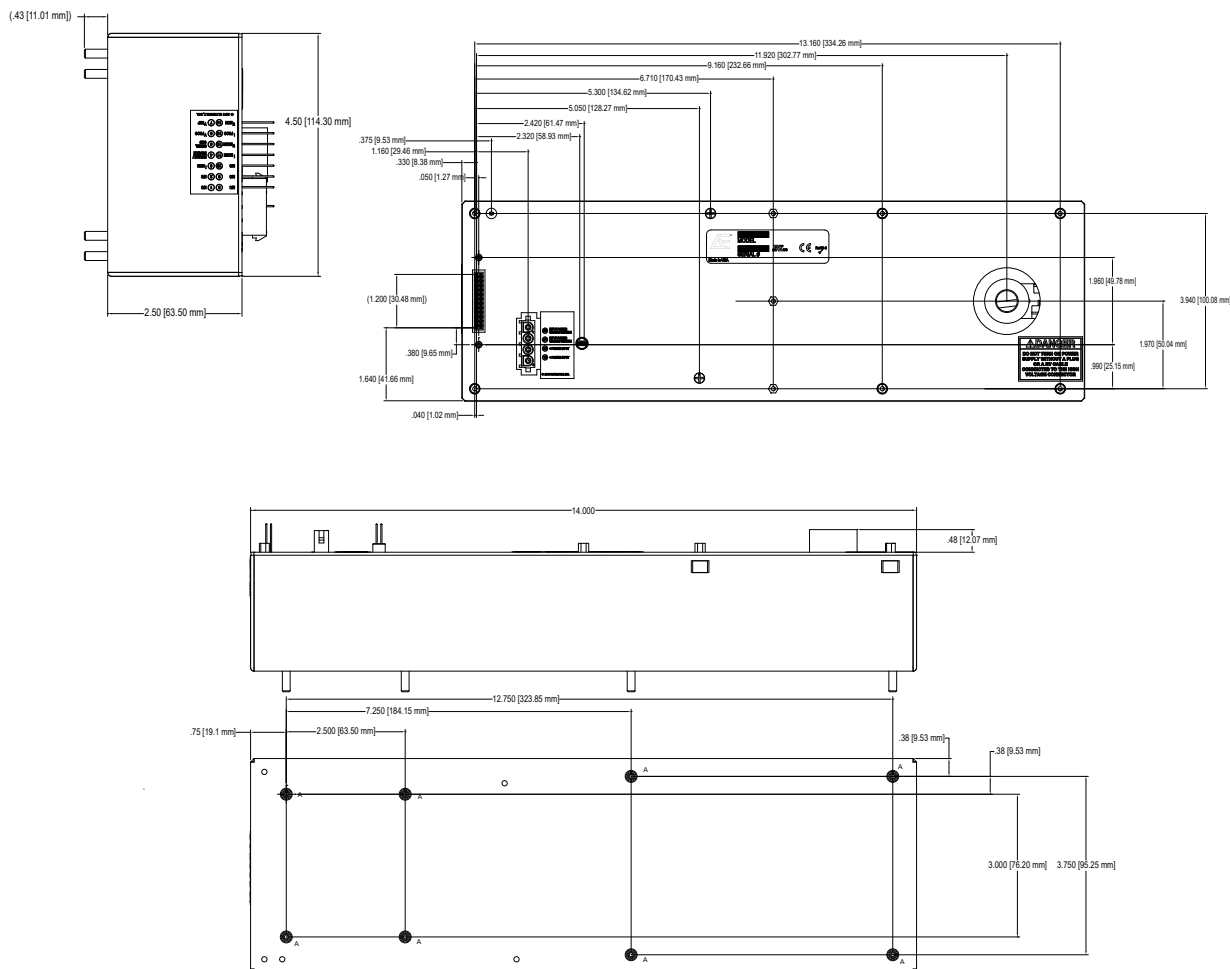

ULTRAVOLT HIGH POWER 40C TO 60C SERIES

MECHANICAL SPECIFICATIONS (CONTINUED)

40C and 50C with -WS and 60C

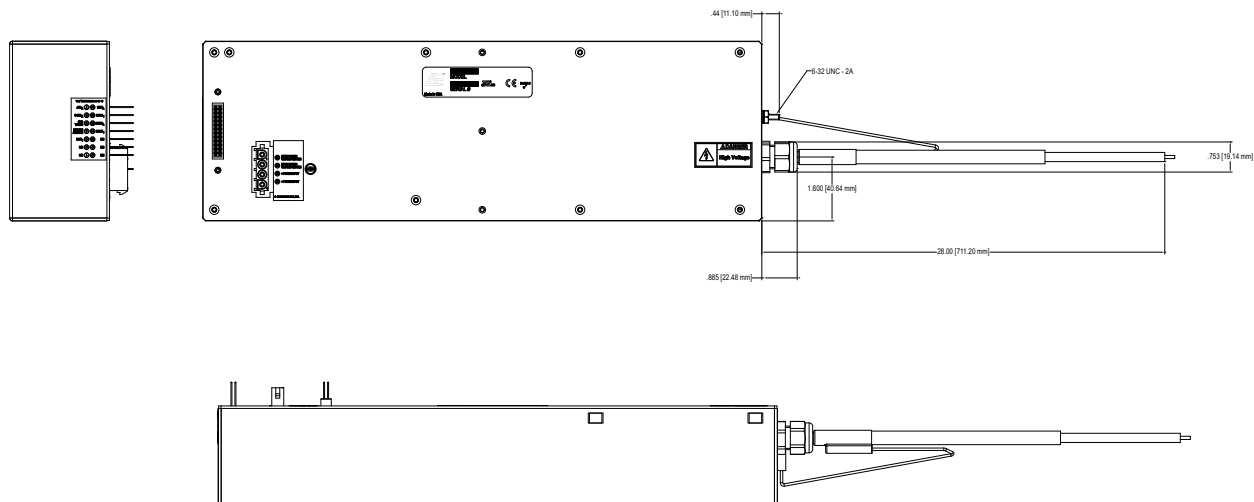

Construction	
Standard Case	Aluminum (Anodized per MIL-A-8625 Type II)
Bottom Mounting Studs	Eight #8-32 steel threaded standoffs
Heatsink	Aluminum (Anodized, -H Option)
PCB Standoffs	Zinc-plated steel (-Z11 Option)
Labels	Static-dissipative polyester
Cooling	Natural convection and conduction
Encapsulation	Silicone-based RTV (contact factory for other options)
Pins	Gold-plated bronze

Volumes and Weights	All Models	
	cm ³	in ³
Volume (Module body only)	2621.9	160.0
Weight (Standard Configuration)	g	oz
	4536	160.0

INTERFACE

Connections		
Pin	Function: Standard	Function: I5 or I10 option
1 and 8	N/C	N/C
2 and 9	N/C	N/C
3	Iout Monitor	Buffered Current Monitor (5 mA max)
4	Enable/Disable	Enable/Disable
5	Signal Ground	Signal Ground
6	Voltage Programming	Voltage Programming
7	+5 VDC Reference Output	+5 VDC (-I5) or +10 VDC (I10) Reference Output
10	N/C	N/C or Arc Detection Option
11	N/C	Current Mode Indicator
12	N/C	Voltage Mode Indicator
13	N/C	Current Programming
14	Output Voltage Monitor	Buffered Voltage Monitor (5 mA max)
15 and 16	HV Ground Return	HV Ground Return
19 and 20	Positive DC Power Input	Positive DC Power Input
21 and 22	Input Power Ground Return	Input Power Ground Return
LGH3 (40, 50 kV) ¹	HV Output	HV Output
28" Coaxial Flying Lead (60 kV)	HV Output	HV Output

¹ 40 and 50 kV units require mating cable CA-50kV-1000


ULTRAVOLT HIGH POWER 40C TO 60C SERIES

STANDARD OPTIONS

The High Power C series can be configured with options that adapt its performance and packaging to many application requirements. Customized models to meet specialized voltage ranges, packaging and environmental needs are also available. For a complete list of available options, contact factory.

Option	Description
-I5	Upgrades analog interface to provide more precise control and monitoring of both HVout and Iout using 0 to 5 VDC (full scale) signals. Also adds Iout control and voltage/current mode indication capability not available on the Standard Interface. Not available with -I10 option.
-I10	Upgrades analog interface to provide more precise control and monitoring of both HVout and Iout using 0 to 10 VDC (full scale) signals. Also adds Iout control and voltage/current mode indication capability not available on the Standard Interface. Not available with -I5 option.
-H	Mounts a heatsink onto the case bottom to assist in convective heat dissipation.
-Z11	Permits PCB mounting by adding seven 4.8 mm (0.188 in) x #4-40 threaded standoffs to the case top. Not available with -DA or -DAR option.
-DA	Replaces header with D-sub connector (Type DA-15, Male). Not available with -DAR or -Z11 option.
-DAR	Replaces header with right-angle D-sub connector (Type DA-15, Male). Not available with -DA or -Z11 option.
-AD	Arc detection option (Only available with -I5 or -I10 interface)
-AQ	Arc quench option (Only available with -I5 or -I10 interface) (includes-AD)

RISE TIME / CAPACITOR CHARGING

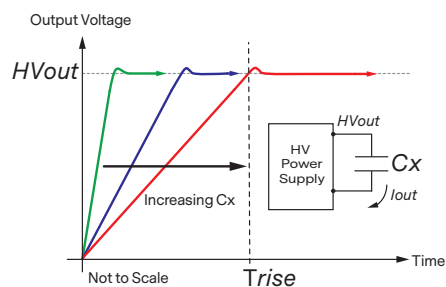

$$Trise = \frac{(Co + Cx) \times HVout}{Iout}$$

$$Iout = (Co + Cx) \times HVout \times freq$$

$$Pout = \frac{(Co + Cx) \times (HVout)^2}{2 \times Trise}$$

Trise = Rise time (Seconds)

Co = Internal storage capacitance (Farads)

Cx = External capacitive load (Farads)

freq = Switching frequency (Hz)

HVout = Output voltage (VDC)

Iout = Output current (Amps)


Pout = Output power (Watts)

ORDERING INFORMATION

Type	0 to 40,000 VDC Output	40C
	0 to 50,000 VDC Output	50C
	0 to 60,000 VDC Output	60C
Input	24 VDC Nominal	24
Polarity	Positive Output	-P
	Negative Output	-N
Power	60 W Output	60
	125 W Output	125
	250 W Output	250
Heatsink	1.02 cm (0.400") high (sized to fit case)	-H
PCB Support	(6) 0.47 cm (0.187) standoffs on top of cover	-Z11
Enhanced Interface	5 V Control and Monitors	-I5
	10 V Control and Monitors	-I10
Performance Options	Arc Detect*	-AD
	Arc Quench*	-AQ
Connection Options	Straight 15-Pin D-sub connector (Type DA-15Male)	-DA
	Right-angle 15-Pin D-sub connector (Type DA-15Male)	-DAR

* Available only with I5 or I10 options

* -DA and -DAR not available with a -Z11 option

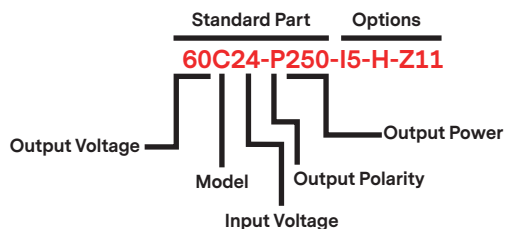



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Since 1981, Advanced Energy (AE) — and its UltraVolt® family of products — has perfected how power performs for its customers. For both end users and OEMs, AE's comprehensive portfolio of standard and custom high-voltage components precisely match system specifications to deliver unparalleled energy, quality, and performance. Through close customer collaboration, design expertise, application insight, and world-class support, AE creates successful partnerships and enables customers to push the boundaries of innovation and stay ahead of evolving market needs.

PRECISION | POWER | PERFORMANCE | TRUST



CAUTION:
High Voltage

Read and understand all documentation before you install, operate, or maintain Advanced Energy high voltage power supplies. Follow all safety instructions and precautions to protect against property damage and serious or possibly fatal bodily injury. Never defeat safety interlocks or grounds.

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2019 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, and Ultravolt® are U.S. trademarks of Advanced Energy Industries, Inc.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[60C24-P125-I10-AQ](#) [60C24-P60-I5-AD-H-Z11](#) [60C24-P60-I5-AD-Z11](#) [60C24-P60-I5-AQ-H-Z11](#) [60C24-P60-I5-AQ-Z11](#) [60C24-P60-I5-H-Z11](#) [60C24-P250-I5-AQ-Z11](#) [60C24-P250-I5-DAR](#) [60C24-P250-I5-H-Z11](#) [60C24-P250-I5-Z11](#) [60C24-P250-I5-AD-H-Z11](#) [60C24-P250-I5-AD-Z11](#) [60C24-P250-I5-AQ-DA-H](#) [60C24-P250-I5-AQ-H-Z11](#) [60C24-P125-I5-AD-H-Z11](#) [60C24-P125-I5-AD-Z11](#) [60C24-P125-I5-AQ-H-Z11](#) [60C24-P125-I5-AQ-Z11](#) [60C24-P125-I5-H-Z11](#) [60C24-P125-I5-Z11](#) [60C24-N60-I5-AQ-Z11](#) [60C24-N60-I5-H-Z11](#) [60C24-N60-I5-AD-H-Z11](#) [60C24-N60-I5-AD-Z11](#) [60C24-N60-I5-AQ-H-Z11](#) [60C24-N250-I5-AD-Z11](#) [60C24-N250-I5-AQ-H-Z11](#) [60C24-N250-I5-AQ-Z11](#) [60C24-N250-I5-DA-H](#) [60C24-N250-I5-H-Z11](#) [60C24-N250-I5-Z11](#) [60C24-N250-I5-AD-H-Z11](#) [60C24-N125-I5-H-Z11](#) [60C24-N125-I5-Z11](#) [60C24-N125-I5-AD-H-Z11](#) [60C24-N125-I5-AD-Z11](#) [60C24-N125-I5-AQ-H-Z11](#) [60C24-N125-I5-AQ-Z11](#) [50C24-P60-I5-AQ-Z11](#) [50C24-P60-I5-WS-DA](#) [50C24-P60-I5-AD-WS-Z11](#) [50C24-P60-I5-AD-Z11](#) [50C24-P60-I5-AQ-H-Z11](#) [50C24-P60-I5-AQ-WS-DAR-H](#) [50C24-P60-I5-AQ-WS-H-Z11](#) [50C24-P60-I5-AQ-WS-Z11](#) [50C24-P60-I5-AD-H-Z11](#) [50C24-P60-I5-AD-WS-H-Z11](#) [50C24-P250-I5-AQ-DAR](#) [50C24-P250-I5-AQ-H](#) [50C24-P250-I5-AQ-H-Z11](#) [50C24-P250-I5-AQ-WS-H-Z11](#) [50C24-P250-I5-AQ-WS-Z11](#) [50C24-P250-I5-AQ-Z11](#) [50C24-P250-I5-AD-H-Z11](#) [50C24-P250-I5-AD-WS-H-Z11](#) [50C24-P250-I5-AD-WS-Z11](#) [50C24-P250-I5-AD-Z11](#) [50C24-P125-I5-AQ-WS-H-Z11](#) [50C24-P125-I5-AQ-WS-Z11](#) [50C24-P125-I5-AQ-Z11](#) [50C24-P125-WS-DAR](#) [50C24-P125-I5-AD-H-Z11](#) [50C24-P125-I5-AD-WS-DA-H](#) [50C24-P125-I5-AD-WS-H-Z11](#) [50C24-P125-I5-AD-WS-Z11](#) [50C24-P125-I5-AD-Z11](#) [50C24-P125-I5-AQ-H-Z11](#) [50C24-N60-I5-AQ-WS-H-Z11](#) [50C24-N60-I5-AQ-WS-Z11](#) [50C24-N60-I5-AQ-Z11](#) [50C24-N60-I5-AD-H-Z11](#) [50C24-N60-I5-AD-WS-DA](#) [50C24-N60-I5-AD-WS-H-Z11](#) [50C24-N60-I5-AD-WS-Z11](#) [50C24-N60-I5-AD-Z11](#) [50C24-N60-I5-AQ-H-Z11](#) [50C24-N250-I5-AQ-Z11](#) [50C24-N250-I5-AD-WS-Z11](#) [50C24-N250-I5-AD-Z11](#) [50C24-N250-I5-AQ-DA-H](#) [50C24-N250-I5-AQ-H-Z11](#) [50C24-N250-I5-AQ-WS-H-Z11](#) [50C24-N250-I5-AQ-WS-Z11](#) [50C24-N250-I5-AD-H-Z11](#) [50C24-N250-I5-AD-WS-H-Z11](#) [50C24-N125-I5-AD-Z11](#) [50C24-N125-I5-AQ-H-Z11](#) [50C24-N125-I5-AQ-WS-H-Z11](#) [50C24-N125-I5-AQ-WS-Z11](#) [50C24-N125-I5-AD-H-Z11](#) [50C24-N125-I5-AD-WS-H-Z11](#) [50C24-N125-I5-AD-WS-Z11](#) [40C24-P60-I5-AQ-Z11](#) [40C24-P60-I5-AD-WS-H-Z11](#) [40C24-P60-I5-AD-WS-Z11](#) [40C24-P60-I5-AD-Z11](#) [40C24-P60-I5-AQ-H-Z11](#) [40C24-P60-I5-AQ-WS-H-Z11](#)