
Mounting Option


12-.128 (3.25) Dia. Side Mounting Holes

Contact Detail

521-P.C. Tail .025 Sq.(0.64 Sq.) - Tail LG=.150(3.81)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

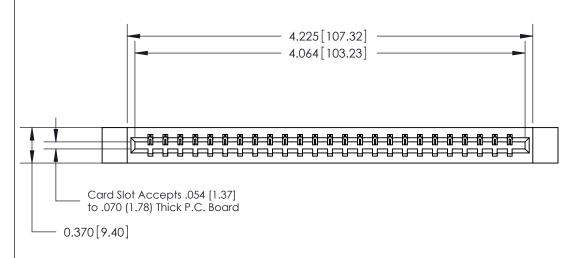

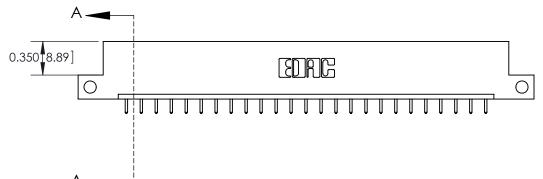


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL



See Accompanying Page for:

- Bend Detail
- Mounting Options
- Features and Specifications

| 333 Series Card Edge Connector |
|--------------------------------|
| Part Number: 333-025-521-112 |



EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIE
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

| | ACAD REFERENCE NO | . 333 ENG MASTER |
|---|-------------------|------------------|
| | DRAWN: J.LEE | DATE: OCT. 14/09 |
| | CHECKED: | DATE: |
| | SCALE: NTS | SHEET 1 OF 4 |
| D | DRAWING NUMBER | ISSUE |

/ING NUMBER ISSUE 333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER

ORIGINAL

1



| 333 Series Card Edge Conn | ACAD REFERENCE NO. 333 ENG MASTER | | | |
|--|--|------------------|---------|--------|
| Contact Bend Detail | DRAWN: J.LEE | DATE: OCT. 14/09 | | |
| Contact bend betail | | CHECKED: | DATE: | |
| TO THE SE DIVINITION OF THE SECOND SE | | SCALE: NTS | SHEET 2 | 2 OF 4 |
| TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE RASIS FOR THE | DRAWING NUMBER | | ISSUE | |
| | JR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PERMISSION. | | | 1 |

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SSUE NUMBER

DRIGINAL

1



| 333 Series Card Edge Connector | | | ACAD REFERENCE NO. 333 ENG MASTER | | | | |
|--------------------------------|--|----------------|--|-------------|-----------|--------|-------|
| | | DRAWN: | J.LEE | DATE: O | CT. 14/09 | | |
| | Mounting Options | | CHECKED |): | DATE: | | |
| | The second secon | | SCALE: | NTS | SHEET : | 3 OF 4 | |
| | | RONTO, ONTARIO | ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | DRAWING | NUMBER | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | 3 | 33 Assembly | | 1 | |

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

| 333 Series Card Edge Connector | ACAD REFERENCE NO. 333 ENG MASTER |
|------------------------------------|--|
| Features and Specifications | DRAWN: J.LEE DATE: OCT. 14/09 |
| realities and specifications | CHECKED: DATE: |
| | WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4 |
| I SI I I ORONTO, ONTARIO SHALL NOT | BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE |
| | JRE OR SALE OF APPARATUS 333 Assombly 1 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-025-521-112