
Mounting Option


07-M3-0.5 Metric Threaded Inserts

Contact Detail


500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

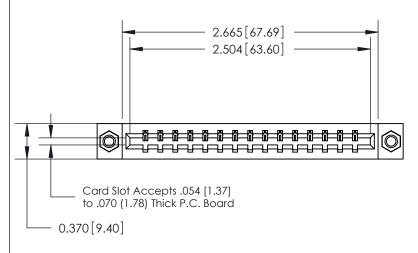

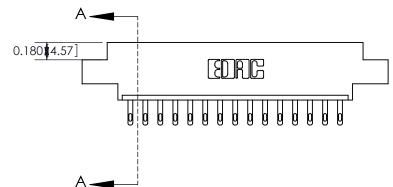





333 Series Card Edge Connector Part Number: 333-015-500-607

YOUR CONNECTION TO QUALITY & SERVICE

	DRAWN: J.LEE	DATE: OCT. 14/09
	CHECKED:	DATE:
	SCALE: NTS	SHEET 1 OF 4
D	DRAWING NUMBER	ISSUE

ACAD REFERENCE NO. 333 ENG MASTER


333 Assembly

See Accompanying Page for:

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1

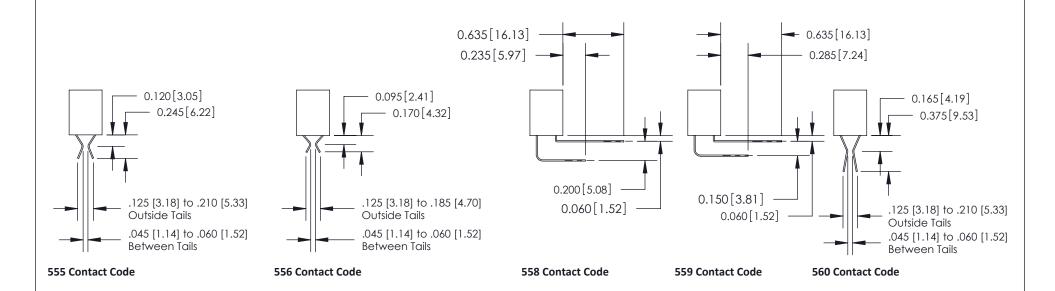

333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OCT. 14/09		
Confider bend Defail		CHECKED:	DATE:	
EDAC INC			SHEET 2	2 OF 4
TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIEL OR USED AS THE BASIS FOR THE		DRAWING NUMBER		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS			1


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

ORIGINAL

1

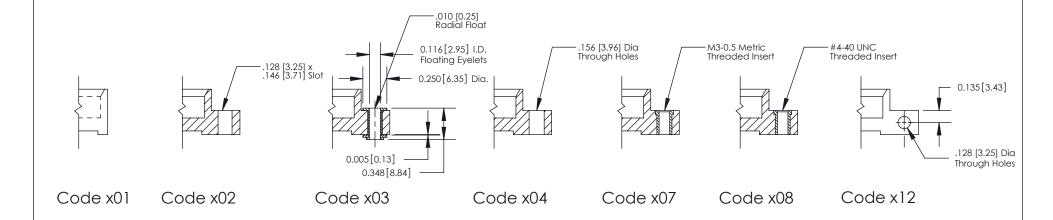

333 Series Card Edge Connector			ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN:	J.LEE	DATE: O	CT. 14/09	
		CHECKED:		DATE:		
EDAC INC			NTS	SHEET ;	3 OF 4	
TORONTO, ONTARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVIC		33	33 Assembly		1	

ISSUE NUMBER

ORIGINAL



Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	JRE OR SALE OF APPARATUS 333 Assombly 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-015-500-607